

SUBMITTAL DATA - INDOOR UNIT

VUCD048S6-5P

Ceiling Mount

Job:
Location:
Schedule No.:
System Designation:

Engineer:
Architect:
Location:
Date:

For: Reference Approval Review Construction

Ceiling Indoor Unit

FEATURES

- Ceiling Mount ONLY
- Simple display
- Fast cooling air flow
- Refrigerant R-32
- Single side installation
- Easy operation
- Superior performance

WARRANTY

- 10-year limited warranty.*See warranty for details.

SPECIFICATIONS

PERFORMANCE

Cooling Capacity ¹ (Btu/h)	48,000
Heating Capacity ¹ (Btu/h)	54,000
Airflow (CFM)	Low/Medium/High 918/1088/1286
Sound (dBA)	Low/Medium/High 38/43/46

ELECTRICAL DATA

Power Supply (Volts/Hertz/Phase)	208-230/60/1
Minimum Circuit Ampacity (MCA) (A)	3.30
Maximum Overcurrent Protection (MOP) (A)	15
Cooling Power Input ² (W)	160
Cooling Rated Current (A)	1.45
Heating Power Input ² (W)	160
Heating Rated Current (A)	1.45
Fan Motor Output W x n	244 X 1

DIMENSIONS

Unit Dimensions (in)	Width	64.96
	Height	9.25
	Depth	26.57
Liquid Pipe Connection (in) (I.D.)		3/8
Gas Pipe Connection (in) (I.D.)		5/8
Net Weight (lb)		92.6
Shipping Weight (lb)		106.9

OPTIONAL ACCESSORIES

VSTAT02P-1 Touch Screen Wired Controller	37P79
VSTAT04P-1 Individual Wired Controller	37Y74
VSTAT01P-1 Wireless Remote Controller	37Y73



NOTES

1. Specification may be subject to change without prior notice.
2. Performances are based on the following test conditions.
 - a. Cooling : Indoor temperature : 80°F(26.7°C) DB, 67°F(19.4°C) WB, Outdoor temperature : 95°F(35°C) DB, 75°F(23.9°C) WB
 - b. Heating : Indoor temperature : 70°F(21.1°C) DB, 60°F(15.6°C) WB, Outdoor temperature : 47°F(8.3°C) DB, 43°F(6.1°C) WB
 - c. Equivalent refrigerant piping length 7.5m(24.6ft), Level differences : 0m(0ft))
3. Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.
4. These products contain R32 (GWP=675) which is fluorinated greenhouse gas.
5. Select wire size based on the value of MCA






Powered by
SAMSUNG

SUBMITTAL DATA - INDOOR UNIT

VUCD048S6-5P

Ceiling Mount

DIMENSIONAL DRAWINGS - MM (IN.)

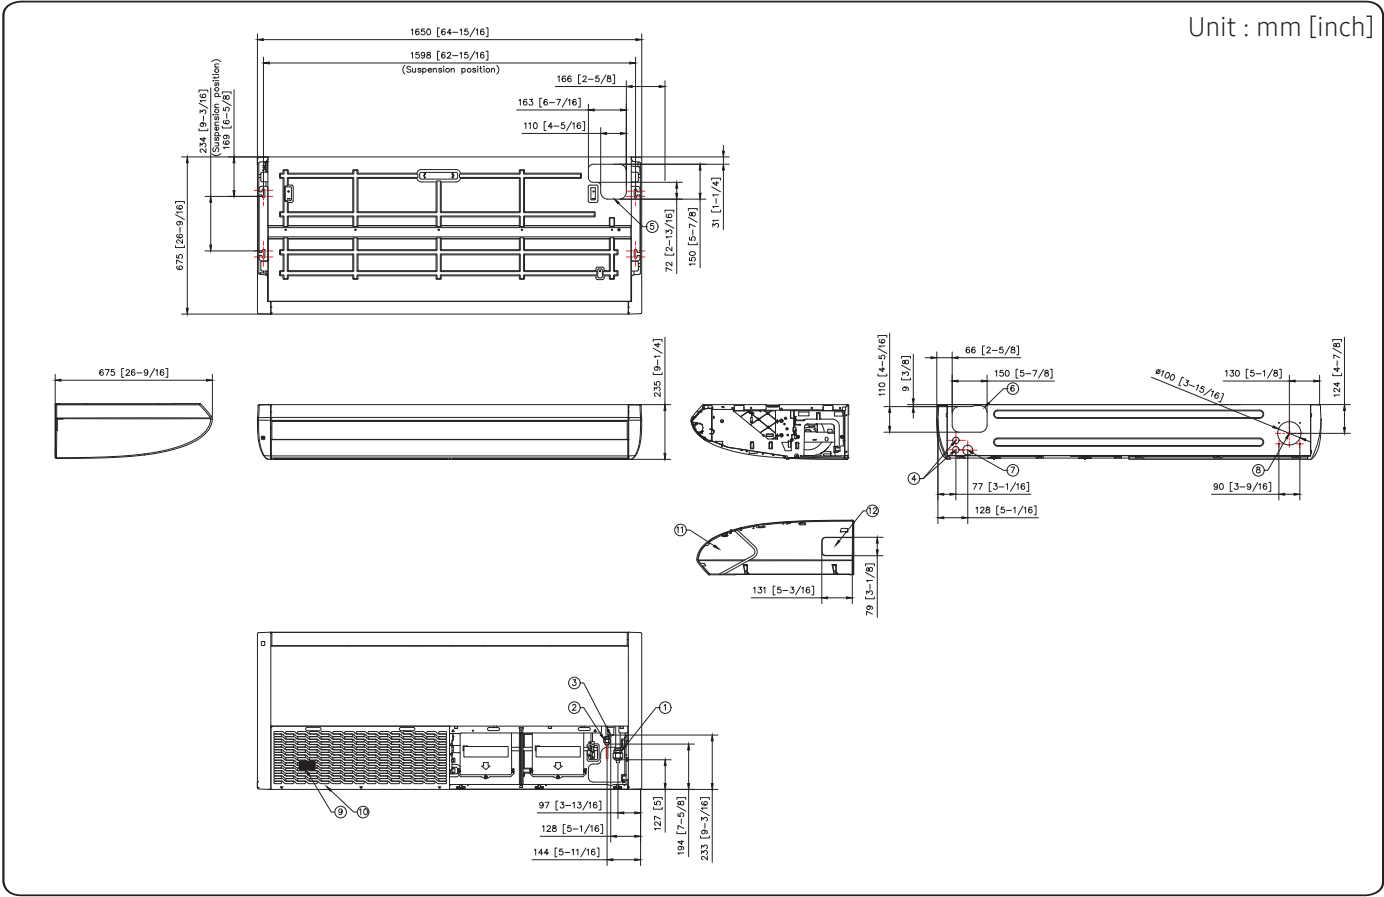

No.	Name	Description
1	Refrigerant gas pipe	Φ15.88 (5/8)
2	Refrigerant liquid pipe	Φ9.52 (3/8)
3	Condensate drain	VP25 (OD 25, ID 20)
4	Conduit hole	Φ28(1-1/8)
5	Knockout hole for upper piping arrangement	
6	Knockout hole for rear piping arrangement	
7	Knockout hole for drain pipe arrangement	
8	Knockout hole for fresh air intake	Φ42(Φ1-5/16)
9	Air filter	
10	Air suction grille	
11	Cover side	
12	Knockout hole for side piping arrangement	

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability.
Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury.
Installation and service must be performed by a qualified installer and servicing agency.