

# MWHD | Single-Zone | Wall Only



Standard Efficiency Heat Pump Outdoor Units | **R-32** | 60 Hz

RESIDENTIAL / COMMERCIAL  
PRODUCT SPECIFICATIONS (EHB)

SEER2 up to 25.0

HSPF2 up to 10.0

0.75 to 2 Tons

Cooling Capacity - 9,000 to 22,000 Btuh

Heating Capacity - 11,000 to 24,000 Btuh



MWHD024S6S  
Heat Pump Outdoor Units



MWHD Wall-Mount Units  
with Wireless Remote Control  
(furnished)




MWHD009S6S, MWHD012S6S  
and MWHD015S6S  
Heat Pump Outdoor Units  
(MWHD018S6S not shown)



Works with  
**Samsung SmartThings**

## MODEL NUMBER IDENTIFICATION

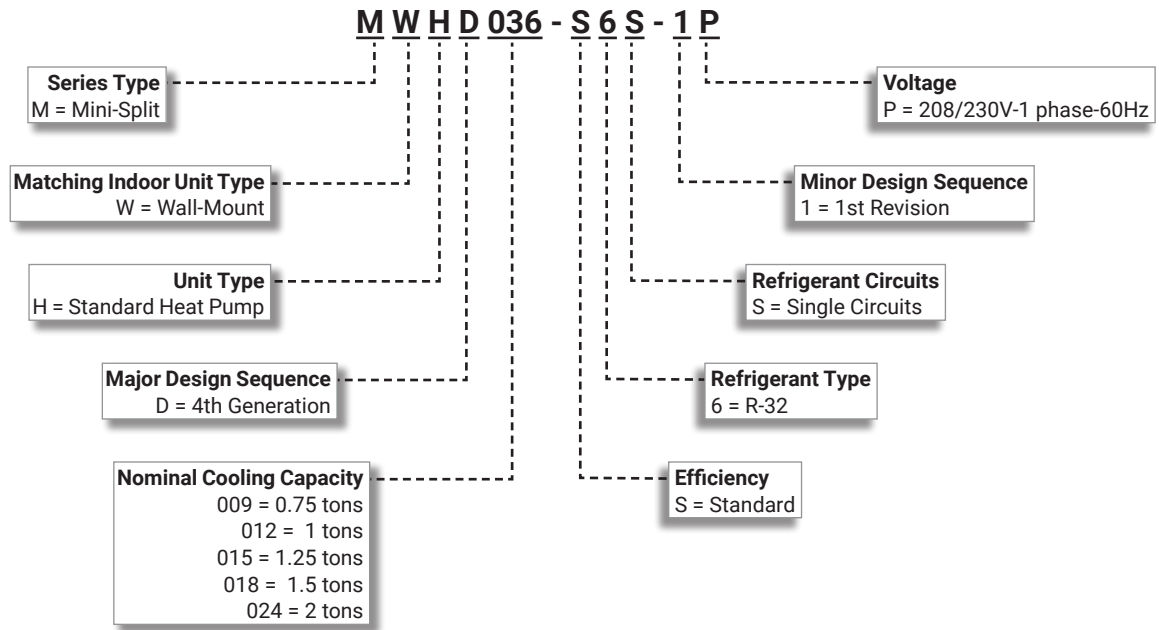

## CONTENTS

|                                                   |    |
|---------------------------------------------------|----|
| AHRI System Matches . . . . .                     | 13 |
| Approvals And Warranty . . . . .                  | 4  |
| Capacity Correction. . . . .                      | 28 |
| Dimensions . . . . .                              | 19 |
| - Center Of Gravity. . . . .                      | 23 |
| - Unit . . . . .                                  | 19 |
| Features . . . . .                                | 4  |
| - Indoor Unit Overview . . . . .                  | 6  |
| - Outdoor Units . . . . .                         | 4  |
| Installation Clearances . . . . .                 | 24 |
| Mobile Apps . . . . .                             | 7  |
| Model Number Identification. . . . .              | 2  |
| Operation Range . . . . .                         | 27 |
| Optional Accessories - Order Separately . . . . . | 12 |
| Sound Data . . . . .                              | 26 |
| Specifications . . . . .                          | 10 |
| - 009-015. . . . .                                | 10 |
| - 018-024. . . . .                                | 11 |
| System Components . . . . .                       | 3  |

## SYSTEM COMPONENTS



Wireless Remote Control  
(Included with all indoor units)

Also available:  
Advanced Wired Control  
Touchscreen Controller  
Thermostat Adaptor  
(use with any 24V thermostat)



MWHD Wall-Mounted  
Non-Ducted Indoor Unit



MWHD009 and 012 Outdoor Unit  
(not shown - MWHD015-018-024)

Single zone heat pumps offer a wide range of capacities and indoor unit configurations. One outdoor unit is matched to one indoor unit.

## APPROVALS AND WARRANTY

### **APPROVALS**

- AHRI Standard 210/240-2023 certified with Addenda 1 and 2
- ENERGY STAR® certified units are designed to use less energy, help save money on utility bills, and help protect the environment
- Rated According to U.S. Department of Energy (DOE) test procedures
- Outdoor units and components UL and CEC bonded for grounding to meet safety standards for servicing
- ETL certified for the U.S. and Canada

### **WARRANTY**

- Compressor - Limited seven years
- All other covered components
  - Limited five years in all applications
- Accessories and controls - Limited one year

**NOTE** - Refer to Lennox Basic Limited Warranty at [www.Lennox.com](http://www.Lennox.com) for additional details.

## FEATURES

### **APPLICATIONS**

- 0.75 through 2 ton
- Single phase power supply (208/230V)
- Outdoor unit powers indoor unit
- Sound levels as low as 45 dBA
- Ductless mini-split systems provide a wide range of capacities and applications and provide an alternative when a ducted system is impractical or cost prohibitive
- Units shipped completely factory assembled, internally piped, and wired

**NOTE** - Outdoor unit is designed for outdoor location only.

### **REFRIGERATION SYSTEM**

#### **R-32 Refrigerant**

- Low GWP (Global Warming Potential)
- Zero ODP (Ozone Depletion Potential)
- Low Toxicity/Lower Flammability - A2L
- Unit is factory pre-charged

#### **Outdoor Coil**

- Aluminum fins fitted to copper tubes

#### **Outdoor Fan**

- Direct drive fan moves large air volumes uniformly through entire outdoor coil for high refrigeration capacity
- Fan guard furnished

## OUTDOOR UNITS

#### **Refrigerant Line Connections, Service Valve**

- Flare connection lines are located on side of unit cabinet
- Fully serviceable brass service valve prevents corrosion and provides access to refrigerant system

### **COMPRESSOR**

#### **Variable Frequency Rotary Compressor**

- Compressor features high efficiency operation
- Balanced for reduced vibration and quiet operation
- Brushless DC motor uses powerful Neodymium magnets, which are approximately 15-20 times stronger than ferrite magnets used in conventional AC compressors

#### **Compressor Crankcase Heater**

- Protects against liquid refrigerant migration that can occur during low ambient operation

**CONTROLS****DC Inverter Control**

- Provides continuous operation, while adjusting capacity according to room temperature
- The accurate sensing of cooling loads prevents frequent changes in capacity and ensures efficient, economical operation

**Inverter Module Protection**

- Protects against differences in current, voltage and temperature
- Displays code on the indoor unit indicating a need for servicing

**Outdoor Unit Microprocessor**

- Electronic expansion valve control
- Automatic compressor timed-off protection (3 minutes)
- Temperature sensor
- LEDs on control display error codes and assist in troubleshooting
- 4-Way reversing valve control

**Electronic Expansion Valve**

- Furnished on all models

**Compressor Overcurrent Protection**

- Overcurrent protection can result due to any of the following:
  - Ambient temperature is too high
  - Locked rotor on the compressor
  - Outdoor air is blocked or restricted

**Condenser High Temperature Protection**

- Condenser high temperature can occur due to any of the following conditions:
  - High outdoor ambient
  - Outdoor fan blocked
  - Outdoor coil blocked
- The outdoor coil thermistor continuously monitors the temperature and communicates with the microprocessor
- Depending on the temperature measured, the compressor will be allowed to increase the frequency if needed to meet the load or is forced to run at the current or reduced frequency
- If the temperature becomes excessively high the compressor will be de-energized

**Compressor Discharge Temperature Protection**

- The compressor discharge line thermistor continuously monitors the temperature and communicates with the microprocessor
- Depending on the temperature measured, the compressor will be allowed to increase the frequency to meet the load or is forced to run at the current or reduced frequency
- If the temperature becomes excessively high, the compressor will be de-energized

**Voltage Protection**

- Protects unit from low or high voltage fluctuations

**Terminal Strip**

- Furnished for easy wiring connections

**Defrost Control**

- Defrost cycle is automatically enabled if there is a build-up of frost on the outdoor coil
- Outdoor fan operation is terminated during the defrost cycle
- Indoor fan changes to ultra low speed during the defrost cycle to help bring warm refrigerant back to the outdoor coil to assist during defrost operation
- Defrost LED is lit on the indoor unit panel on the front cover during a defrost cycle

**Reversing Valve**

- 4-way interchange reversing valve effects a rapid change in direction of refrigerant flow resulting in quick changeover from cooling to heating and vice versa
- Valve operates on pressure differential between outdoor unit and indoor unit of the system

**CABINET**

- Constructed of heavy gauge steel
- Tabs on unit base allow secure mounting to slab
- Condensate drain outlets furnished on unit base

**NOTE** - Drain must be field furnished.

- Access cover for power and control wiring connections
- Access cover for service valves

**WALL-MOUNTED INDOOR UNITS**

- Eliminates ductwork by utilizing refrigerant piping to preserve space in the attic or closet
- Compact and unobtrusive design also blends seamlessly into any space
- Low-sound
- Swing louver angles to 90°
- **Calm Air Feature** - When louvers are closed, thousands of micro holes in panel provide a dispersed, gentle flow of air
- Unit installs horizontally on a vertical wall
- Vacuum or washable reusable filter media
- Flare connections
- Wall plate furnished for installation
- Wireless remote controller furnished

**NOTE** - See the MWHD Product Specifications.

## MOBILE APPS

### Lennox Home App




- The free Lennox Home App is available for use on smartphones.
- The Lennox Home App integrates with the SmartThings app to control Mini-Split system modes and fan operation



### SmartThings App



- SmartThings is a free app that uses Wi-Fi to connect smart devices built on the Matter protocol, regardless of the company that makes them
- Users can remotely regulate temperature, adjust settings, receive real-time updates about system performance and energy usage, as well as troubleshoot solutions if service is needed
- Quickly and easily connect, automate and manage your smart home devices through SmartThings
- SmartThings is compatible with hundreds of smart home brands
- With SmartThings, you can connect, monitor and control multiple smart home devices quicker and easier
- Connect smart TVs, smart appliances, smart speakers and brands like Samsung, Ring, Nest and Philips Hue - all from one free app
- Control your smart devices using voice assistant skills including Alexa, Bixby and Google Assistant

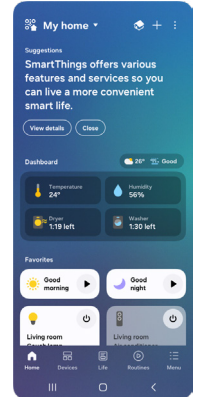

## OPTIONAL ACCESSORIES - ORDER SEPARATELY

### OUTDOOR UNITS

(See Optional Accessories Table on page 12 for Selection)


- Equipment Pads
- Equipment Stands
- Hail Guards
- Wind Baffles
- Wall Brackets
- Line Sets
- Control Wiring
- Disconnects
- Whips

### SPEEDICHANNEL™ SYSTEM



- SpeediChannel™ is a channel system covers system line sets
- Two-part system has a base and a cover
- Base is fastened to a wall or ceiling with plastic clips (SpeediClip™) that snap into a channel already molded into the base
- Cover fits on top of the base
- Manufactured from rigid PVC, which is UL rated and resistant to UV light
- System is a natural color that closely matches typical mini-split outdoor units
- Can be painted as desired to match any wall color

#### **Typical Application**

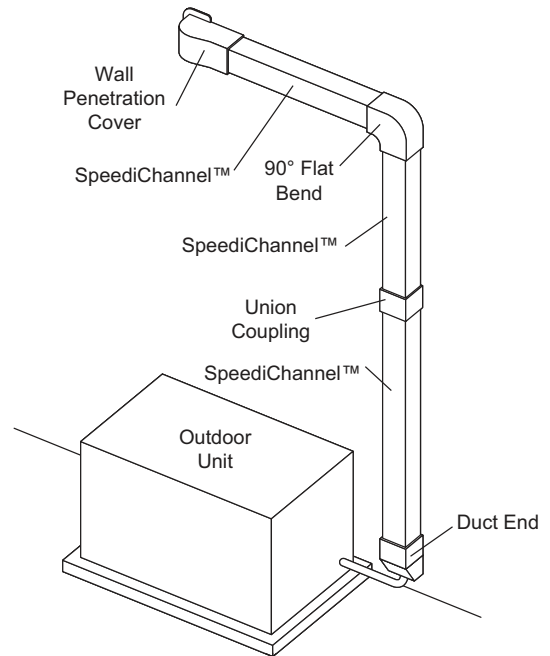

## OPTIONAL ACCESSORIES - ORDER SEPARATELY

### **SPEEDICHANNEL™ SYSTEM (continued)**

#### **SpeediChannel™ Starter Kit**

- The starter kit includes (1) Coupling, (1) Wall Penetration, (1) Inside Elbow, (1) Long Radius Flat Bend, (10) Speediclips™, (10) 11 in. Cable Ties, and (1) SpeediChannel Instruction Booklet

#### **Duct End**

- Duct Ends are used to terminate a run of SpeediChannel™ to a small opening just large enough for the line set and condensate drain line to pass through



#### **Flat Wall Escutcheon**

- Flat Wall Escutcheons are used to cover a rough opening in a soffit, wall, or ceiling penetration




- One side of the escutcheon is flat to allow for a SpeediChannel™ to run along a wall and to penetrate through an adjacent wall or ceiling
- This is the most common type of wall penetration
- Furnished in two parts, the escutcheon easily snaps onto the SpeediChannel™

#### **Flex Joint**

- A Flex Joint is an accordion-style piece of SpeediChannel™
- The flex joint can be extremely flexible when routing a SpeediChannel™ system around an obstacle
- Each joint is 20 in. long and can be combined together for longer flex runs
- The flex joint does not require the use of a union coupling
- The flex joint slides tightly inside the SpeediChannel™ system

#### **T-Joint**

- T-Joints are used for creating a tee connection between three pieces of SpeediChannel™
- Each tee is individually packed and furnished with stainless steel screws



#### **Union Coupling**

- Union Couplings are used for joining two pieces of SpeediChannel™
- Each coupling is individually packed and furnished with stainless steel screws



#### **Wall Penetration Cover**

- Wall penetration covers are used to transition from the SpeediChannel™ system to a through wall penetration
- Wall covers are designed to allow for easy installation, even after the line set has been installed
- A hooking and fastening arrangement allows for quick installation
- Each wall cover is individually packed, and furnished with stainless steel screws to attach the wall cover to the base
- Three screws are necessary to fasten the wall cover to the wall construction, regardless of the type of installed system



#### **45° and 90° Flat Bend Elbows**

- 45° Flat Bends are used to route the SpeediChannel™ around obstacles
- Each bend is individually packed and furnished with stainless steel screws




45°



90°

#### **90° Inside Elbow**

- 90° Inside Elbows are used to route the SpeediChannel™ around an inside corner
- Each elbow is individually packed and furnished with stainless steel screws



#### **Mount Block White Qty. (2) 14 in. and (2) 36 in.**

- Mount Blocks are used as mounting bases when outdoor units must be bolted down
- End caps (for aesthetics) come furnished with mounting bolts
- Maximum load capacity is 900 pounds per mounting block
- Installation temperatures range from -4°F to 140°F
- Mount blocks fit all mini-split outdoor units with a sliding rail feature



| SPECIFICATIONS                                          |                                                                 | 009-015                  |              |              |
|---------------------------------------------------------|-----------------------------------------------------------------|--------------------------|--------------|--------------|
| Model                                                   |                                                                 | MWHD009S6S               | MWHD012S6S   | MWHD015S6S   |
| Tons                                                    |                                                                 | 0.75                     | 1            | 1.25         |
| Ambient Temperature Range - °F                          | Cooling                                                         | 14 to 115                | 14 to 115    | 14 to 115    |
|                                                         | Heating                                                         | -5 to 75                 | -5 to 75     | -5 to 75     |
| Connections                                             | Liquid (flare) - in.                                            | 1/4                      | 1/4          | 1/4          |
|                                                         | Gas (flare) - in.                                               | 3/8                      | 3/8          | 1/2          |
|                                                         | Maximum pipe length for all rooms - ft                          | 66                       | 66           | 98           |
|                                                         | Maximum height difference between indoor and outdoor units - ft | 49                       | 49           | 66           |
| Refrigerant                                             | Charge furnished (R-32)                                         | 2 lbs. 2 oz.             | 2 lbs. 2 oz. | 3 lbs. 9 oz. |
| Compressor                                              | Type                                                            | BLDC Rotary              | BLDC Rotary  | BLDC Rotary  |
|                                                         | Output (kW)                                                     | 4.09                     | 4.09         | 4.68         |
|                                                         | Refrigerant oil type                                            | POE                      | POE          | POE          |
|                                                         | Initial oil charge - oz                                         | 11.8                     | 11.8         | 15.2         |
| Outdoor Fan                                             | Number and Type                                                 | 1 Propeller              | 1 Propeller  | 1 Propeller  |
|                                                         | cfm                                                             | 1590                     | 1590         | 1770         |
| Outdoor Fan Motor                                       | Type                                                            | BLDC                     | BLDC         | BLDC         |
|                                                         | Output (W)                                                      | 40                       | 40           | 40           |
| Outdoor Coil                                            | Type                                                            | Aluminum Fin/Copper Tube |              |              |
| Sound Data (dBA)                                        | Cooling                                                         | 45                       | 46           | 51           |
| Shipping Data                                           | Net                                                             | 70                       | 70           | 84           |
|                                                         | Shipping                                                        | 75                       | 75           | 91           |
| ELECTRICAL DATA                                         |                                                                 |                          |              |              |
| Line voltage data (Volts-Phase-Hz)                      |                                                                 | 208/230-1-60             | 208/230-1-60 | 208/230-1-60 |
| <sup>1</sup> Maximum Overcurrent Protection (MOCP) amps |                                                                 | 20                       | 20           | 25           |
| <sup>2</sup> Minimum circuit ampacity (MCA)             |                                                                 | 12                       | 12.5         | 16           |

NOTE - Extremes of operating range are plus and minus 10% of line voltage.

<sup>1</sup> HACR type circuit breaker or fuse.

<sup>2</sup> Refer to National or Canadian Electrical Code manual to determine wire, fuse and disconnect size requirements.

| SPECIFICATIONS                                          |                                                                 | 018-024                  |              |
|---------------------------------------------------------|-----------------------------------------------------------------|--------------------------|--------------|
| Model                                                   |                                                                 | MWHD018S6S               | MWHD024S6S   |
| Tons                                                    |                                                                 | 1.5                      | 2            |
| Ambient Temperature Range - °F                          | Cooling                                                         | 14 to 115                | 14 to 115    |
|                                                         | Heating                                                         | -5 to 75                 | -5 to 75     |
| Connections                                             | Liquid (flare) - in.                                            | 1/4                      | 1/4          |
|                                                         | Gas (flare) - in.                                               | 1/2                      | 5/8          |
|                                                         | Maximum pipe length for all rooms - ft                          | 98                       | 98           |
|                                                         | Maximum height difference between indoor and outdoor units - ft | 66                       | 66           |
| Refrigerant                                             | Charge furnished (R-32)                                         | 3 lbs. 5 oz.             | 4 lbs. 7 oz. |
| Compressor                                              | Type                                                            | BLDC Rotary              | BLDC Rotary  |
|                                                         | Output (kW)                                                     | 4.68                     | 8.02         |
|                                                         | Refrigerant oil type                                            | POE                      | POE          |
|                                                         | Initial oil charge - oz                                         | 15.2                     | 23.7         |
| Outdoor Fan                                             | Number and Type                                                 | 1 Propeller              | 1 Propeller  |
|                                                         | cfm                                                             | 2015                     | 2825         |
| Outdoor Fan Motor                                       | Type                                                            | BLDC                     | BLDC         |
|                                                         | Output (W)                                                      | 125                      | 125          |
| Outdoor Coil                                            | Type                                                            | Aluminum Fin/Copper Tube |              |
| Sound Data (dBA)                                        | Cooling                                                         | 51                       | 54           |
| Shipping Data                                           | Net                                                             | 108                      | 151          |
|                                                         | Shipping                                                        | 116                      | 162          |
| ELECTRICAL DATA                                         |                                                                 |                          |              |
| Line voltage data (Volts-Phase-Hz)                      |                                                                 | 208/230-1-60             | 208/230-1-60 |
| <sup>1</sup> Maximum Overcurrent Protection (MOCP) amps |                                                                 | 30                       | 30           |
| <sup>2</sup> Minimum circuit ampacity (MCA)             |                                                                 | 21                       | 21           |

NOTE - Extremes of operating range are plus and minus 10% of line voltage.

<sup>1</sup> HACR type circuit breaker or fuse.

<sup>2</sup> Refer to National or Canadian Electrical Code manual to determine wire, fuse and disconnect size requirements.

## OPTIONAL ACCESSORIES - ORDER SEPARATELY

| Description                                                                    |                                              | Order Number | Size |     |     |     |     |
|--------------------------------------------------------------------------------|----------------------------------------------|--------------|------|-----|-----|-----|-----|
|                                                                                |                                              |              | 009  | 012 | 015 | 018 | 024 |
| OUTDOOR UNIT                                                                   |                                              |              |      |     |     |     |     |
| Line Sets                                                                      | 1/4 x 3/8   3/8   25 ft.                     | 90X53        | •    | •   |     |     |     |
| Liquid x Gas OD   Insulation Thickness   Length                                | 1/4 x 3/8   3/8   50 ft.                     | X0258        | •    | •   |     |     |     |
|                                                                                | 1/4 x 1/2   3/8   25 ft.                     | 90X52        |      |     | •   | •   |     |
|                                                                                | 1/4 x 1/2   3/8   50 ft.                     | X0259        |      |     | •   | •   |     |
|                                                                                | 1/4 x 5/8   3/8   25 ft.                     | 90X51        |      |     |     |     | •   |
|                                                                                | 1/4 x 5/8   3/8   50 ft.                     | X0260        |      |     |     |     | •   |
| Hail Guards                                                                    | Side                                         | 38U95        | •    | •   |     |     |     |
|                                                                                | Back                                         | 38U89        | •    | •   |     |     |     |
|                                                                                | Side                                         | 38V01        |      |     | •   |     |     |
|                                                                                | Back                                         | 38U94        |      |     | •   |     |     |
|                                                                                | Side                                         | 38U96        |      |     |     | •   |     |
|                                                                                | Back                                         | 38U90        |      |     |     | •   |     |
|                                                                                | Side                                         | 38U97        |      |     |     |     | •   |
|                                                                                | Back                                         | 38U91        |      |     |     |     | •   |
| Wind Baffles                                                                   | Front                                        | 38V18        | •    | •   |     |     |     |
|                                                                                | Back                                         | 38V12        | •    | •   |     |     |     |
|                                                                                | Front                                        | 38V19        |      |     | •   |     |     |
|                                                                                | Back                                         | 38V13        |      |     | •   |     |     |
|                                                                                | Front                                        | 38V20        |      |     |     | •   |     |
|                                                                                | Back                                         | 38V14        |      |     |     | •   |     |
|                                                                                | Front                                        | 38V17        |      |     |     |     | •   |
|                                                                                | Back                                         | 38V11        |      |     |     |     | •   |
| Equipment Pads                                                                 | 18 x 38 x 3 in. direct mount, gray plastic   | Y5014        | •    | •   | •   | •   | •   |
|                                                                                | 24 x 48 x 3 in. black                        | 28V63        | •    | •   | •   | •   | •   |
| Equipment Stands                                                               | 12 in. height, adjustable 34 to 40 in. white | Y8240        | •    | •   | •   | •   | •   |
|                                                                                | 18 in. height, adjustable 34 to 40 in. white | Y8236        | •    | •   | •   | •   | •   |
|                                                                                | 10 in. height, 24 x 36 in. gray              | Y8397        | •    | •   | •   | •   | •   |
|                                                                                | 18 in. height, 30 x 40 in. gray              | 28U18        | •    | •   | •   | •   | •   |
| Wall Brackets                                                                  | Wall unit installation support tool          | Y6999        | •    | •   | •   | •   | •   |
|                                                                                | 30 x 16 in. (D x H) gray (qty 2)             | X1727        | •    | •   | •   | •   | •   |
| 25 x 18-3/8 in. (D x H), adjustable width 6 to 34 in. SS, wind/hurricane rated |                                              | Y8239        | •    | •   | •   | •   | N/A |
| Control Wiring                                                                 | Five conductor cable, 250 ft. (14/3, 16/2)   | 29F41        | •    | •   | •   | •   | •   |
|                                                                                | Weather-tight cable connector (qty 1)        | 29F45        | •    | •   | •   | •   | •   |
| Disconnects                                                                    | 30A Pull-out Fusible                         | Y9684        | •    | •   | •   | •   | •   |
|                                                                                | 60A Pull-out Fusible                         | Y9685        | •    | •   | •   | •   | •   |
|                                                                                | 60A Pull-out Non-Fusible                     | Y9686        | •    | •   | •   | •   | •   |
| Whips                                                                          | Metal Fittings 1/2 in. x 6 ft., 10 AWG       | 29P54        | •    | •   | •   | •   | •   |
|                                                                                | Metal Fittings 3/4 in. x 6 ft., 8 AWG        | 27P44        | •    | •   | •   | •   | •   |
|                                                                                | Plastic Fittings 1/2 in. x 6 ft., 10 AWG     | 36P48        | •    | •   | •   | •   | •   |
|                                                                                | Plastic Fittings 3/4 in. x 6 ft., 8 AWG      | 46N89        | •    | •   | •   | •   | •   |
| SPEEDICHANNEL™ SYSTEM                                                          |                                              |              |      |     |     |     |     |
| SpeediChannel™ Starter Kit - 4 in.                                             |                                              | Y7950        | •    | •   | •   | •   | •   |
| SpeediChannel - 4 in. x 6-1/2 ft. (qty. 6)                                     |                                              | Y3388        | •    | •   | •   | •   | •   |
| Union Coupling - 4 in.                                                         |                                              | Y3389        | •    | •   | •   | •   | •   |
| 90° Flat Bend Elbow - 4 in.                                                    |                                              | Y3390        | •    | •   | •   | •   | •   |
| 90° Inside Elbow - 4 in.                                                       |                                              | Y3391        | •    | •   | •   | •   | •   |
| 90° Outside Elbow - 4 in.                                                      |                                              | Y6074        | •    | •   | •   | •   | •   |
| 45° Flat Bend Elbow - 4 in.                                                    |                                              | Y3392        | •    | •   | •   | •   | •   |
| Flex Joint - 4 in.                                                             |                                              | Y3393        | •    | •   | •   | •   | •   |
| T-Joint - 4 in.                                                                |                                              | Y3394        | •    | •   | •   | •   | •   |
| Duct End - 4 in.                                                               |                                              | Y3395        | •    | •   | •   | •   | •   |
| Flat Wall Escutcheon - 4 in.                                                   |                                              | Y3396        | •    | •   | •   | •   | •   |
| Wall Penetration Cover - 4 in.                                                 |                                              | Y3399        | •    | •   | •   | •   | •   |
| Mount Block (White) Qty, 2 - 14 in.                                            |                                              | Y3397        | •    | •   | •   | •   | •   |
| Mount Block (White) Qty, 2 - 36 in.                                            |                                              | Y3398        | •    | •   | •   | •   | •   |

## AHRI SYSTEM MATCHES

| Outdoor Unit  | Indoor Unit  | Cooling Capacity | SEER2 | EER2  | Heating Capacity | HSPF2 (IV) | AHRI Reference Number | Energy Star Certified? |
|---------------|--------------|------------------|-------|-------|------------------|------------|-----------------------|------------------------|
| MWHD009S6S-1P | MWHD009S6-1P | 9,000            | 25.0  | 15.00 | 11,000           | 9.0        | 216411315             | Yes                    |
| MWHD012S6S-1P | MWHD012S6-1P | 12,000           | 24.0  | 13.25 | 12,000           | 9.0        | 216411316             | Yes                    |
| MWHD015S6S-1P | MWHD015S6-1P | 15,000           | 21.5  | 12.95 | 15,000           | 10.0       | 216411317             | Yes                    |
| MWHD018S6S-1P | MWHD018S6-1P | 18,000           | 21.5  | 12.85 | 21,000           | 9.0        | 216411318             | Yes                    |
| MWHD024S6S-1P | MWHD024S6-1P | 22,000           | 20.0  | 12.20 | 24,000           | 8.0        | 216411319             | Yes                    |

Ratings are AHRI certified to AHRI Standard 210/240-2023;

- Cooling Ratings - 95°F wet bulb/75°F dry bulb outdoor air temperature and 80°F dry bulb/67°F wet bulb entering indoor coil air.
- High Temperature Heating Ratings - 47°F dry bulb/43°F wet bulb outdoor air temperature and 70°F dry bulb/60°F wet bulb entering indoor coil air.
- Low Temperature Heating Ratings - 17°F dry bulb/15°F wet bulb outdoor air temperature and 70°F dry bulb/60°F wet bulb entering indoor coil air.

To convert HSPF from Region IV to Region V - Divide by 1.15.

## COOLING CAPACITY

MWHD009S6S + MWHD009S6

| Outdoor Temp. °F<br>(Dry Bulb) | Indoor Temperature - °F (Dry Bulb / Wet Bulb) |            |          |           |            |          |           |            |          |           |            |          |           |            |          |           |            |          |           |            |          |           |            |          |
|--------------------------------|-----------------------------------------------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|
|                                | 64 / 53                                       |            |          | 68 / 57   |            |          | 72 / 61   |            |          | 77 / 64   |            |          | 80 / 67   |            |          | 82 / 70   |            |          | 86 / 72   |            |          | 90 / 75   |            |          |
|                                | TC<br>MBH                                     | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW |
| -0.4                           | 9.4                                           | 7.4        | 0.5      | 9.8       | 7.8        | 0.6      | 10.1      | 8.1        | 0.7      | 10.5      | 8.4        | 0.8      | 10.8      | 8.7        | 0.9      | 11.1      | 8.9        | 0.9      | 11.9      | 9.5        | 0.9      | 13.0      | 10.4       | 0.9      |
| 32                             | 9.6                                           | 7.6        | 0.4      | 10.0      | 8.0        | 0.5      | 10.4      | 8.3        | 0.6      | 10.9      | 8.7        | 0.7      | 11.3      | 9.0        | 0.7      | 11.6      | 9.2        | 0.8      | 12.4      | 9.9        | 0.8      | 13.6      | 10.9       | 0.7      |
| 50                             | 10.1                                          | 8.0        | 0.4      | 10.6      | 8.5        | 0.5      | 11.0      | 8.8        | 0.6      | 11.5      | 9.2        | 0.7      | 11.9      | 9.5        | 0.7      | 12.2      | 9.8        | 0.7      | 13.1      | 10.5       | 0.7      | 14.3      | 11.4       | 0.7      |
| 68                             | 10.5                                          | 8.4        | 0.4      | 11.0      | 8.8        | 0.5      | 11.4      | 9.2        | 0.6      | 12.0      | 9.6        | 0.7      | 12.4      | 9.9        | 0.7      | 12.7      | 10.1       | 0.7      | 13.5      | 10.8       | 0.7      | 14.8      | 11.8       | 0.7      |
| 85                             | 10.5                                          | 8.4        | 0.4      | 11.0      | 8.8        | 0.6      | 11.4      | 9.1        | 0.7      | 11.9      | 9.5        | 0.8      | 12.3      | 9.8        | 0.8      | 12.6      | 10.1       | 0.8      | 13.4      | 10.7       | 0.8      | 14.6      | 11.7       | 0.8      |
| 95                             | 10.2                                          | 8.1        | 0.5      | 10.7      | 8.5        | 0.6      | 11.0      | 8.8        | 0.7      | 11.5      | 9.2        | 0.9      | 9.0       | 7.2        | 0.6      | 12.2      | 9.7        | 0.9      | 13.0      | 10.4       | 0.9      | 14.2      | 11.3       | 0.9      |
| 104                            | 9.6                                           | 7.7        | 0.6      | 10.1      | 8.1        | 0.7      | 10.4      | 8.3        | 0.8      | 10.8      | 8.7        | 1.0      | 11.2      | 9.0        | 1.0      | 11.5      | 9.2        | 1.0      | 12.3      | 9.8        | 1.0      | 13.4      | 10.7       | 1.0      |
| 110                            | 9.1                                           | 7.2        | 0.6      | 9.5       | 7.6        | 0.8      | 9.8       | 7.9        | 0.9      | 10.2      | 8.2        | 1.0      | 10.6      | 8.5        | 1.1      | 10.8      | 8.7        | 1.1      | 11.6      | 9.3        | 1.1      | 12.7      | 10.2       | 1.1      |
| 115                            | 8.5                                           | 6.8        | 0.7      | 8.9       | 7.1        | 0.8      | 9.2       | 7.4        | 1.0      | 9.6       | 7.7        | 1.1      | 9.9       | 7.9        | 1.2      | 10.2      | 8.1        | 1.2      | 10.9      | 8.7        | 1.2      | 12.0      | 9.6        | 1.2      |

TC = Total Capacity

SHC = Sensible Heating Capacity

PI = Power Input

## HEATING CAPACITY

MWHD009S6S + MWHD009S6

| Outdoor Temp. °F<br>(Dry Bulb) | Indoor Temperature - °F (Dry Bulb) |          |           |          |           |          |           |          |           |          |           |          |
|--------------------------------|------------------------------------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|
|                                | 61                                 |          | 64        |          | 68        |          | 70        |          | 72        |          | 75        |          |
|                                | TC<br>MBH                          | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW |
| -5                             | 9.2                                | 1.4      | 8.9       | 1.4      | 8.7       | 1.4      | 8.7       | 1.5      | 8.8       | 1.6      | 8.8       | 1.8      |
| -4                             | 9.5                                | 1.5      | 9.2       | 1.4      | 9.1       | 1.5      | 9.0       | 1.5      | 9.0       | 1.6      | 9.1       | 1.8      |
| 0                              | 10.6                               | 1.6      | 10.3      | 1.6      | 10.2      | 1.6      | 10.1      | 1.7      | 10.1      | 1.8      | 10.1      | 2.0      |
| 5                              | 11.7                               | 1.8      | 11.5      | 1.7      | 11.3      | 1.7      | 11.2      | 1.8      | 11.2      | 1.9      | 11.0      | 2.1      |
| 14                             | 13.2                               | 1.8      | 13.1      | 1.8      | 12.9      | 1.8      | 12.7      | 1.9      | 12.6      | 2.0      | 12.3      | 2.2      |
| 23                             | 14.0                               | 1.8      | 14.0      | 1.8      | 13.8      | 1.8      | 13.6      | 1.9      | 13.4      | 1.9      | 13.0      | 2.1      |
| 32                             | 14.4                               | 1.7      | 14.5      | 1.6      | 14.3      | 1.7      | 14.1      | 1.7      | 13.8      | 1.8      | 13.2      | 2.0      |
| 41                             | 14.4                               | 1.5      | 14.6      | 1.4      | 14.5      | 1.5      | 14.3      | 1.6      | 14.0      | 1.6      | 13.3      | 1.8      |
| 47                             | 14.3                               | 1.3      | 14.7      | 1.3      | 14.6      | 1.4      | 11.0      | 0.8      | 14.0      | 1.5      | 13.3      | 1.7      |
| 55                             | 14.1                               | 1.2      | 14.6      | 1.2      | 14.7      | 1.2      | 14.5      | 1.3      | 14.1      | 1.4      | 13.2      | 1.5      |
| 65                             | 13.9                               | 1.1      | 14.7      | 1.1      | 14.9      | 1.1      | 14.7      | 1.2      | 14.3      | 1.3      | 13.4      | 1.4      |
| 75                             | 14.0                               | 1.1      | 15.1      | 1.1      | 15.4      | 1.2      | 15.3      | 1.2      | 14.9      | 1.3      | 13.9      | 1.4      |

TC = Total Capacity

PI = Power Input

## COOLING CAPACITY

## MWHD012S6S + MWHD012S6

| Outdoor Temp. °F<br>(Dry Bulb) | Indoor Temperature - °F (Dry Bulb / Wet Bulb) |            |          |           |            |          |           |            |          |           |            |          |           |            |          |           |            |          |           |            |          |           |            |          |
|--------------------------------|-----------------------------------------------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|
|                                | 64 / 53                                       |            |          | 68 / 57   |            |          | 72 / 61   |            |          | 77 / 64   |            |          | 80 / 67   |            |          | 82 / 70   |            |          | 86 / 72   |            |          | 90 / 75   |            |          |
|                                | TC<br>MBH                                     | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW |
| -0.4                           | 11.0                                          | 8.6        | 0.6      | 11.0      | 8.8        | 0.7      | 11.1      | 9.0        | 0.8      | 11.6      | 9.3        | 0.9      | 12.1      | 9.7        | 1.0      | 12.5      | 10.0       | 1.0      | 13.4      | 10.7       | 1.0      | 14.5      | 11.6       | 1.0      |
| 32                             | 10.6                                          | 8.3        | 0.4      | 10.6      | 8.4        | 0.5      | 10.8      | 8.7        | 0.7      | 11.4      | 9.1        | 0.8      | 11.9      | 9.5        | 0.8      | 12.3      | 9.8        | 0.8      | 13.2      | 10.5       | 0.8      | 14.4      | 11.5       | 0.8      |
| 50                             | 11.2                                          | 8.8        | 0.4      | 11.3      | 9.0        | 0.5      | 11.5      | 9.3        | 0.7      | 12.1      | 9.7        | 0.8      | 12.6      | 10.1       | 0.8      | 13.1      | 10.4       | 0.8      | 14.1      | 11.2       | 0.8      | 15.3      | 12.2       | 0.8      |
| 68                             | 12.2                                          | 9.6        | 0.5      | 12.2      | 9.8        | 0.7      | 12.5      | 10.1       | 0.8      | 13.1      | 10.5       | 0.9      | 13.7      | 10.9       | 1.0      | 14.1      | 11.2       | 1.0      | 15.1      | 12.0       | 1.0      | 16.3      | 13.1       | 0.9      |
| 85                             | 12.7                                          | 10.0       | 0.6      | 12.7      | 10.2       | 0.8      | 12.9      | 10.4       | 1.0      | 13.6      | 10.9       | 1.1      | 14.1      | 11.3       | 1.2      | 14.5      | 11.6       | 1.2      | 15.5      | 12.4       | 1.2      | 16.7      | 13.4       | 1.2      |
| 95                             | 12.5                                          | 9.8        | 0.7      | 12.5      | 10.0       | 0.9      | 12.7      | 10.3       | 1.1      | 13.3      | 10.7       | 1.3      | 12.0      | 9.6        | 0.9      | 14.3      | 11.4       | 1.3      | 15.3      | 12.2       | 1.4      | 16.5      | 13.2       | 1.3      |
| 104                            | 11.9                                          | 9.4        | 0.8      | 11.9      | 9.5        | 1.0      | 12.1      | 9.8        | 1.2      | 12.7      | 10.2       | 1.4      | 13.2      | 10.6       | 1.4      | 13.6      | 10.9       | 1.5      | 14.6      | 11.6       | 1.5      | 15.8      | 12.6       | 1.5      |
| 110                            | 11.3                                          | 8.8        | 0.9      | 11.2      | 9.0        | 1.1      | 11.4      | 9.2        | 1.3      | 11.9      | 9.6        | 1.4      | 12.4      | 10.0       | 1.5      | 12.8      | 10.3       | 1.6      | 13.8      | 11.0       | 1.6      | 15.0      | 12.0       | 1.6      |
| 115                            | 10.5                                          | 8.2        | 0.9      | 10.4      | 8.4        | 1.1      | 10.6      | 8.6        | 1.3      | 11.1      | 9.0        | 1.5      | 11.6      | 9.3        | 1.6      | 12.0      | 9.6        | 1.6      | 13.0      | 10.3       | 1.7      | 14.1      | 11.3       | 1.6      |

TC = Total Capacity

SHC = Sensible Heating Capacity

PI = Power Input

## HEATING CAPACITY

## MWHD012S6S + MWHD012S6

| Outdoor Temp. °F<br>(Dry Bulb) | Indoor Temperature - °F (Dry Bulb) |          |           |          |           |          |           |          |           |          |           |          |
|--------------------------------|------------------------------------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|
|                                | 61                                 |          | 64        |          | 68        |          | 70        |          | 72        |          | 75        |          |
|                                | TC<br>MBH                          | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW |
| -5                             | 9.7                                | 1.5      | 9.4       | 1.4      | 9.3       | 1.5      | 9.2       | 1.5      | 9.3       | 1.7      | 9.3       | 1.9      |
| -4                             | 10.2                               | 1.6      | 9.9       | 1.5      | 9.7       | 1.6      | 9.7       | 1.6      | 9.7       | 1.8      | 9.8       | 2.0      |
| 0                              | 11.9                               | 1.9      | 11.6      | 1.9      | 11.5      | 1.9      | 11.4      | 2.0      | 11.4      | 2.1      | 11.3      | 2.3      |
| 5                              | 13.6                               | 2.2      | 13.4      | 2.1      | 13.2      | 2.2      | 13.1      | 2.3      | 13.0      | 2.4      | 12.8      | 2.6      |
| 14                             | 15.6                               | 2.4      | 15.4      | 2.4      | 15.2      | 2.4      | 15.1      | 2.5      | 14.9      | 2.6      | 14.5      | 2.8      |
| 23                             | 16.4                               | 2.3      | 16.3      | 2.3      | 16.1      | 2.4      | 15.9      | 2.4      | 15.7      | 2.5      | 15.2      | 2.7      |
| 32                             | 16.3                               | 2.1      | 16.4      | 2.0      | 16.2      | 2.1      | 16.0      | 2.2      | 15.7      | 2.3      | 15.1      | 2.5      |
| 41                             | 15.7                               | 1.7      | 16.0      | 1.7      | 15.9      | 1.7      | 15.6      | 1.8      | 15.3      | 1.9      | 14.6      | 2.1      |
| 47                             | 15.2                               | 1.4      | 15.6      | 1.4      | 15.5      | 1.5      | 12.0      | 0.9      | 14.9      | 1.6      | 14.1      | 1.8      |
| 55                             | 14.5                               | 1.1      | 15.1      | 1.1      | 15.1      | 1.2      | 14.9      | 1.3      | 14.5      | 1.3      | 13.6      | 1.5      |
| 65                             | 14.0                               | 1.0      | 14.9      | 1.0      | 15.0      | 1.0      | 14.8      | 1.1      | 14.5      | 1.2      | 13.5      | 1.3      |
| 75                             | 14.3                               | 1.1      | 15.5      | 1.2      | 15.8      | 1.2      | 15.7      | 1.3      | 15.3      | 1.3      | 14.3      | 1.5      |

TC = Total Capacity

PI = Power Input

## COOLING CAPACITY

## MWHD015S6S + MWHD015S6

| Outdoor Temp. °F<br>(Dry Bulb) | Indoor Temperature - °F (Dry Bulb / Wet Bulb) |            |          |           |            |          |           |            |          |           |            |          |           |            |          |           |            |          |           |            |          |           |            |          |
|--------------------------------|-----------------------------------------------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|
|                                | 64 / 53                                       |            |          | 68 / 57   |            |          | 72 / 61   |            |          | 77 / 64   |            |          | 80 / 67   |            |          | 82 / 70   |            |          | 86 / 72   |            |          | 90 / 75   |            |          |
|                                | TC<br>MBH                                     | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW |
| -0.4                           | 15.8                                          | 13.6       | 0.8      | 17.3      | 13.7       | 0.8      | 18.4      | 14.4       | 0.8      | 20.1      | 15.0       | 0.8      | 20.7      | 15.9       | 0.9      | 21.8      | 15.5       | 0.9      | 23.1      | 16.0       | 0.9      | 24.5      | 16.0       | 0.9      |
| 32                             | 15.3                                          | 13.1       | 0.8      | 16.7      | 13.3       | 0.8      | 17.8      | 14.0       | 0.9      | 19.5      | 14.5       | 0.9      | 20.1      | 15.4       | 1.0      | 21.1      | 15.0       | 0.9      | 22.4      | 15.5       | 0.9      | 23.7      | 15.5       | 0.9      |
| 50                             | 15.4                                          | 13.0       | 0.8      | 16.8      | 13.1       | 0.8      | 17.9      | 13.8       | 0.9      | 19.5      | 14.2       | 0.9      | 20.2      | 15.1       | 1.0      | 21.0      | 14.7       | 0.9      | 22.3      | 15.1       | 1.0      | 23.5      | 15.0       | 1.0      |
| 68                             | 15.2                                          | 12.6       | 0.9      | 16.4      | 12.7       | 0.9      | 17.5      | 13.3       | 1.0      | 19.0      | 13.7       | 1.0      | 19.8      | 14.6       | 1.0      | 20.5      | 14.1       | 1.0      | 21.7      | 14.5       | 1.1      | 22.9      | 14.4       | 1.1      |
| 85                             | 14.7                                          | 12.1       | 1.4      | 15.9      | 12.2       | 1.4      | 17.1      | 12.8       | 1.4      | 18.6      | 13.2       | 1.5      | 19.3      | 14.0       | 1.5      | 20.1      | 13.7       | 1.5      | 21.3      | 14.0       | 1.5      | 22.5      | 14.0       | 1.5      |
| 95                             | 14.4                                          | 11.8       | 1.7      | 15.7      | 11.9       | 1.7      | 16.8      | 12.5       | 1.7      | 18.4      | 12.9       | 1.8      | 19.0      | 13.4       | 1.8      | 19.9      | 13.4       | 1.8      | 21.1      | 13.8       | 1.8      | 22.4      | 13.8       | 1.8      |
| 104                            | 13.3                                          | 10.9       | 1.8      | 14.6      | 11.1       | 1.8      | 15.6      | 11.6       | 1.9      | 17.1      | 12.0       | 1.9      | 17.7      | 12.7       | 1.9      | 18.5      | 12.4       | 1.9      | 19.6      | 12.8       | 1.9      | 20.8      | 12.8       | 2.0      |
| 110                            | 12.7                                          | 10.4       | 1.9      | 13.8      | 10.5       | 1.9      | 14.8      | 11.0       | 1.9      | 16.2      | 11.4       | 2.0      | 16.8      | 12.1       | 2.0      | 17.6      | 11.8       | 2.0      | 18.6      | 12.1       | 2.0      | 19.7      | 12.2       | 2.1      |
| 115                            | 12.1                                          | 9.9        | 2.0      | 13.3      | 10.1       | 2.0      | 14.2      | 10.5       | 2.0      | 15.5      | 10.9       | 2.0      | 16.1      | 11.6       | 2.1      | 16.8      | 11.3       | 2.1      | 17.9      | 11.6       | 2.1      | 18.9      | 11.6       | 2.1      |

TC = Total Capacity

SHC = Sensible Heating Capacity

PI = Power Input

## HEATING CAPACITY

## MWHD015S6S + MWHD015S6

| Outdoor Temp. °F<br>(Dry Bulb) | Indoor Temperature - °F (Dry Bulb) |          |           |          |           |          |           |          |           |          |           |          |
|--------------------------------|------------------------------------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|
|                                | 61                                 |          | 64        |          | 68        |          | 70        |          | 72        |          | 75        |          |
|                                | TC<br>MBH                          | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW |
| -5                             | 11.3                               | 1.5      | 11.1      | 1.6      | 11.0      | 1.6      | 10.9      | 1.6      | 10.9      | 1.6      | 10.7      | 1.6      |
| -4                             | 11.3                               | 1.6      | 11.1      | 1.6      | 11.0      | 1.6      | 10.9      | 1.6      | 10.9      | 1.6      | 10.7      | 1.6      |
| 0                              | 12.4                               | 1.6      | 12.2      | 1.6      | 12.0      | 1.6      | 11.9      | 1.7      | 11.9      | 1.7      | 11.7      | 1.7      |
| 5                              | 13.7                               | 1.6      | 13.5      | 1.7      | 13.3      | 1.7      | 13.2      | 1.7      | 13.2      | 1.7      | 13.0      | 1.7      |
| 14                             | 15.9                               | 1.8      | 15.7      | 1.8      | 15.5      | 1.9      | 15.3      | 1.9      | 15.2      | 1.9      | 15.0      | 1.9      |
| 23                             | 18.2                               | 2.0      | 17.9      | 2.0      | 17.6      | 2.0      | 17.5      | 2.0      | 17.3      | 2.1      | 17.1      | 2.1      |
| 32                             | 19.0                               | 1.9      | 18.7      | 1.9      | 18.4      | 2.0      | 18.2      | 2.0      | 18.0      | 2.0      | 17.8      | 2.0      |
| 41                             | 19.8                               | 1.8      | 19.5      | 1.9      | 19.2      | 1.9      | 19.0      | 1.9      | 18.9      | 1.9      | 18.6      | 2.0      |
| 47                             | 20.4                               | 1.8      | 20.1      | 1.8      | 19.8      | 1.9      | 19.0      | 1.1      | 19.4      | 1.9      | 19.2      | 1.9      |
| 55                             | 21.2                               | 1.8      | 20.8      | 1.8      | 20.5      | 1.8      | 20.3      | 1.8      | 20.2      | 1.9      | 19.9      | 1.9      |
| 65                             | 22.1                               | 1.7      | 21.8      | 1.8      | 21.4      | 1.8      | 21.3      | 1.8      | 21.1      | 1.8      | 20.8      | 1.8      |
| 75                             | 23.1                               | 1.7      | 22.7      | 1.7      | 22.4      | 1.7      | 22.2      | 1.7      | 22.0      | 1.8      | 21.7      | 1.8      |

TC = Total Capacity

PI = Power Input

# COOLING CAPACITY

# MWHD018S6S + MWHD018S6

| Outdoor Temp. °F<br>(Dry Bulb) | Indoor Temperature - °F (Dry Bulb / Wet Bulb) |            |          |           |            |          |           |            |          |           |            |          |           |            |          |           |            |          |           |            |          |           |            |          |
|--------------------------------|-----------------------------------------------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|
|                                | 64 / 53                                       |            |          | 68 / 57   |            |          | 72 / 61   |            |          | 77 / 64   |            |          | 80 / 67   |            |          | 82 / 70   |            |          | 86 / 72   |            |          | 90 / 75   |            |          |
|                                | TC<br>MBH                                     | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW |
| -0.4                           | 14.7                                          | 12.5       | 0.9      | 16.1      | 12.7       | 0.9      | 17.2      | 13.3       | 1.0      | 18.8      | 13.8       | 1.0      | 19.4      | 14.7       | 1.1      | 20.3      | 14.3       | 1.0      | 21.6      | 14.7       | 1.1      | 22.9      | 14.8       | 1.1      |
| 32                             | 15.5                                          | 13.1       | 0.9      | 16.9      | 13.3       | 0.9      | 18.1      | 14.0       | 0.9      | 19.7      | 14.5       | 0.9      | 20.3      | 15.4       | 1.0      | 21.4      | 15.0       | 1.0      | 22.6      | 15.4       | 1.0      | 24.0      | 15.5       | 1.0      |
| 50                             | 15.3                                          | 12.8       | 0.9      | 16.7      | 12.9       | 0.9      | 17.8      | 13.5       | 0.9      | 19.4      | 13.9       | 0.9      | 20.1      | 14.8       | 1.0      | 20.9      | 14.4       | 1.0      | 22.2      | 14.8       | 1.0      | 23.4      | 14.8       | 1.0      |
| 68                             | 15.3                                          | 12.6       | 0.9      | 16.5      | 12.6       | 0.9      | 17.6      | 13.2       | 0.9      | 19.2      | 13.6       | 0.9      | 19.9      | 14.5       | 1.0      | 20.7      | 14.0       | 1.0      | 21.9      | 14.4       | 1.0      | 23.0      | 14.3       | 1.0      |
| 85                             | 16.1                                          | 13.1       | 1.5      | 17.6      | 13.2       | 1.5      | 18.8      | 13.9       | 1.5      | 20.5      | 14.4       | 1.6      | 21.3      | 15.2       | 1.6      | 22.2      | 14.8       | 1.6      | 23.5      | 15.2       | 1.6      | 24.8      | 15.2       | 1.6      |
| 95                             | 16.7                                          | 13.5       | 1.9      | 18.3      | 13.7       | 1.9      | 19.6      | 14.3       | 1.9      | 21.4      | 14.8       | 2.0      | 18.0      | 14.4       | 1.4      | 23.2      | 15.4       | 2.0      | 24.6      | 15.8       | 2.0      | 26.0      | 15.8       | 2.0      |
| 104                            | 15.4                                          | 12.4       | 2.1      | 16.8      | 12.6       | 2.1      | 18.0      | 13.2       | 2.1      | 19.7      | 13.7       | 2.2      | 20.4      | 14.5       | 2.2      | 21.4      | 14.2       | 2.2      | 22.7      | 14.5       | 2.2      | 24.0      | 14.6       | 2.3      |
| 110                            | 14.5                                          | 11.7       | 2.2      | 15.9      | 11.9       | 2.2      | 17.0      | 12.5       | 2.3      | 18.6      | 12.9       | 2.3      | 19.3      | 13.7       | 2.3      | 20.2      | 13.4       | 2.3      | 21.4      | 13.7       | 2.4      | 22.7      | 13.8       | 2.4      |
| 115                            | 13.9                                          | 11.2       | 2.3      | 15.1      | 11.3       | 2.3      | 16.2      | 11.9       | 2.4      | 17.7      | 12.3       | 2.4      | 18.4      | 13.1       | 2.4      | 19.2      | 12.7       | 2.4      | 20.4      | 13.1       | 2.5      | 21.6      | 13.1       | 2.5      |

TC = Total Capacity

SHC = Sensible Heating Capacity

PI - Power Input

# HEATING CAPACITY

# MWHD018S6S + MWHD018S6

| Outdoor Temp. °F<br>(Dry Bulb) | Indoor Temperature - °F (Dry Bulb) |          |           |          |           |          |           |          |           |          |           |          |
|--------------------------------|------------------------------------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|
|                                | 61                                 |          | 64        |          | 68        |          | 70        |          | 72        |          | 75        |          |
|                                | TC<br>MBH                          | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW |
| -5                             | 12.1                               | 1.6      | 11.9      | 1.6      | 11.7      | 1.6      | 11.6      | 1.6      | 11.6      | 1.7      | 11.4      | 1.7      |
| -4                             | 12.1                               | 1.6      | 11.9      | 1.6      | 11.7      | 1.7      | 11.6      | 1.7      | 11.6      | 1.7      | 11.4      | 1.7      |
| 0                              | 13.2                               | 1.7      | 13.0      | 1.7      | 12.8      | 1.7      | 12.7      | 1.8      | 12.7      | 1.8      | 12.5      | 1.8      |
| 5                              | 14.6                               | 1.8      | 14.4      | 1.8      | 14.2      | 1.8      | 14.0      | 1.9      | 14.0      | 1.9      | 13.8      | 1.9      |
| 14                             | 16.9                               | 1.9      | 16.7      | 1.9      | 16.5      | 2.0      | 16.3      | 2.0      | 16.3      | 2.0      | 16.0      | 2.0      |
| 23                             | 18.4                               | 1.9      | 18.1      | 1.9      | 17.9      | 2.0      | 17.7      | 2.0      | 17.6      | 2.0      | 17.4      | 2.0      |
| 32                             | 19.9                               | 1.9      | 19.6      | 1.9      | 19.3      | 1.9      | 19.2      | 2.0      | 19.0      | 2.0      | 18.7      | 2.0      |
| 41                             | 20.8                               | 1.8      | 20.5      | 1.9      | 20.2      | 1.9      | 20.0      | 1.9      | 19.8      | 1.9      | 19.6      | 2.0      |
| 47                             | 21.5                               | 1.8      | 21.1      | 1.8      | 20.8      | 1.9      | 21.0      | 1.8      | 20.4      | 1.9      | 20.2      | 1.9      |
| 55                             | 22.3                               | 1.8      | 21.9      | 1.8      | 21.6      | 1.8      | 21.4      | 1.8      | 21.2      | 1.9      | 20.9      | 1.9      |
| 65                             | 23.3                               | 1.7      | 22.9      | 1.7      | 22.6      | 1.8      | 22.4      | 1.8      | 22.2      | 1.8      | 21.9      | 1.8      |
| 75                             | 24.3                               | 1.7      | 23.9      | 1.7      | 23.6      | 1.7      | 23.4      | 1.7      | 23.2      | 1.8      | 22.9      | 1.8      |

TC = Total Capacity

PI - Power Input

## COOLING CAPACITY

## MWHD024S6S + MWHD024S6

| Outdoor Temp. °F<br>(Dry Bulb) | Indoor Temperature - °F (Dry Bulb / Wet Bulb) |            |          |           |            |          |           |            |          |           |            |          |           |            |          |           |            |          |           |            |          |           |            |          |
|--------------------------------|-----------------------------------------------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|-----------|------------|----------|
|                                | 64 / 53                                       |            |          | 68 / 57   |            |          | 72 / 61   |            |          | 77 / 64   |            |          | 80 / 67   |            |          | 82 / 70   |            |          | 86 / 72   |            |          | 90 / 75   |            |          |
|                                | TC<br>MBH                                     | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW | TC<br>MBH | SHC<br>MBH | PI<br>kW |
| -0.4                           | 20.1                                          | 16.1       | 1.3      | 22.0      | 16.3       | 1.3      | 23.5      | 17.1       | 1.4      | 25.6      | 17.8       | 1.4      | 26.5      | 18.9       | 1.5      | 27.8      | 18.5       | 1.5      | 29.5      | 19.0       | 1.5      | 31.3      | 19.0       | 1.5      |
| 32                             | 20.3                                          | 16.2       | 1.3      | 22.2      | 16.4       | 1.3      | 23.7      | 17.2       | 1.3      | 25.8      | 17.9       | 1.4      | 26.7      | 19.0       | 1.5      | 28.0      | 18.5       | 1.4      | 29.7      | 19.1       | 1.4      | 31.5      | 19.1       | 1.4      |
| 50                             | 20.7                                          | 16.3       | 1.3      | 22.5      | 16.4       | 1.3      | 24.1      | 17.2       | 1.3      | 26.2      | 17.8       | 1.4      | 27.1      | 18.9       | 1.4      | 28.3      | 18.3       | 1.4      | 29.9      | 18.8       | 1.4      | 31.6      | 18.8       | 1.4      |
| 68                             | 20.5                                          | 15.9       | 1.3      | 22.2      | 16.0       | 1.3      | 23.7      | 16.7       | 1.4      | 25.7      | 17.2       | 1.4      | 26.7      | 18.3       | 1.5      | 27.7      | 17.8       | 1.5      | 29.3      | 18.2       | 1.5      | 30.9      | 18.1       | 1.5      |
| 85                             | 20.4                                          | 15.7       | 2.2      | 22.2      | 15.8       | 2.3      | 23.8      | 16.6       | 2.3      | 25.9      | 17.1       | 2.4      | 26.9      | 18.2       | 2.4      | 28.0      | 17.7       | 2.4      | 29.7      | 18.2       | 2.5      | 31.4      | 18.2       | 2.5      |
| 95                             | 20.5                                          | 15.6       | 2.9      | 22.3      | 15.8       | 2.9      | 23.9      | 16.5       | 2.9      | 26.1      | 17.1       | 3.0      | 22.0      | 17.6       | 1.8      | 28.4      | 17.7       | 3.0      | 30.1      | 18.2       | 3.1      | 31.9      | 18.3       | 3.1      |
| 104                            | 18.3                                          | 13.9       | 2.8      | 19.9      | 14.1       | 2.8      | 21.4      | 14.8       | 2.9      | 23.3      | 15.3       | 2.9      | 24.2      | 16.2       | 3.0      | 25.3      | 15.8       | 3.0      | 26.8      | 16.2       | 3.0      | 28.4      | 16.3       | 3.0      |
| 110                            | 16.8                                          | 12.8       | 2.7      | 18.4      | 13.0       | 2.8      | 19.7      | 13.6       | 2.8      | 21.5      | 14.1       | 2.9      | 22.3      | 14.9       | 2.9      | 23.3      | 14.6       | 2.9      | 24.7      | 15.0       | 3.0      | 26.2      | 15.0       | 3.0      |
| 115                            | 15.6                                          | 11.9       | 2.7      | 17.1      | 12.1       | 2.8      | 18.3      | 12.6       | 2.8      | 20.0      | 13.1       | 2.8      | 20.7      | 13.9       | 2.9      | 21.7      | 13.6       | 2.9      | 23.0      | 13.9       | 2.9      | 24.4      | 14.0       | 3.0      |

TC = Total Capacity

SHC = Sensible Heating Capacity

PI = Power Input

## HEATING CAPACITY




## MWHD024S6S + MWHD024S6

| Outdoor Temp. °F<br>(Dry Bulb) | Indoor Temperature - °F (Dry Bulb) |          |           |          |           |          |           |          |           |          |           |          |
|--------------------------------|------------------------------------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|
|                                | 61                                 |          | 64        |          | 68        |          | 70        |          | 72        |          | 75        |          |
|                                | TC<br>MBH                          | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW | TC<br>MBH | PI<br>kW |
| -5                             | 19.3                               | 3.2      | 19.0      | 3.2      | 18.8      | 3.3      | 18.6      | 3.3      | 18.6      | 3.3      | 18.3      | 3.4      |
| -4                             | 19.3                               | 3.2      | 19.0      | 3.3      | 18.8      | 3.4      | 18.6      | 3.4      | 18.6      | 3.4      | 18.3      | 3.4      |
| 0                              | 20.7                               | 3.5      | 20.4      | 3.5      | 20.1      | 3.6      | 19.9      | 3.6      | 19.9      | 3.6      | 19.6      | 3.7      |
| 5                              | 22.3                               | 3.8      | 22.0      | 3.8      | 21.7      | 3.9      | 21.5      | 3.9      | 21.5      | 3.9      | 21.2      | 4.0      |
| 14                             | 23.6                               | 3.7      | 23.2      | 3.8      | 22.9      | 3.9      | 22.7      | 3.9      | 22.6      | 3.9      | 22.3      | 4.0      |
| 23                             | 24.9                               | 3.7      | 24.5      | 3.8      | 24.1      | 3.9      | 23.9      | 3.9      | 23.7      | 3.9      | 23.4      | 4.0      |
| 32                             | 25.7                               | 3.6      | 25.3      | 3.7      | 24.9      | 3.7      | 24.7      | 3.8      | 24.5      | 3.8      | 24.2      | 3.9      |
| 41                             | 24.9                               | 3.0      | 24.5      | 3.0      | 24.1      | 3.1      | 23.9      | 3.1      | 23.7      | 3.2      | 23.4      | 3.2      |
| 47                             | 24.7                               | 2.7      | 24.3      | 2.7      | 23.9      | 2.8      | 24.0      | 2.3      | 23.5      | 2.8      | 23.2      | 2.9      |
| 55                             | 25.1                               | 2.6      | 24.7      | 2.6      | 24.3      | 2.7      | 24.1      | 2.7      | 23.9      | 2.7      | 23.6      | 2.7      |
| 65                             | 25.7                               | 2.4      | 25.3      | 2.4      | 24.9      | 2.5      | 24.7      | 2.5      | 24.4      | 2.5      | 24.1      | 2.6      |
| 75                             | 26.2                               | 2.2      | 25.8      | 2.3      | 25.4      | 2.3      | 25.2      | 2.3      | 25.0      | 2.4      | 24.7      | 2.4      |


TC = Total Capacity

PI = Power Input


**MWHD009S6S | MWHD012S6S**

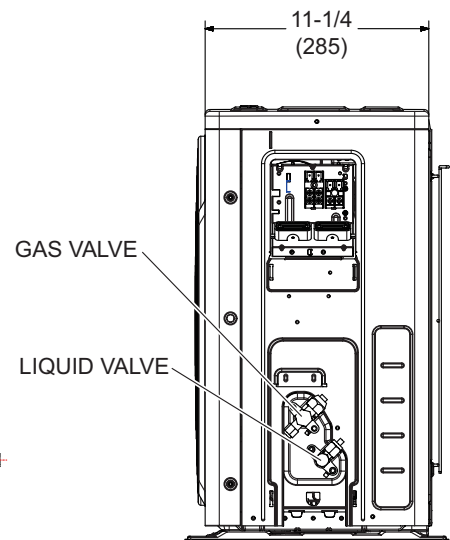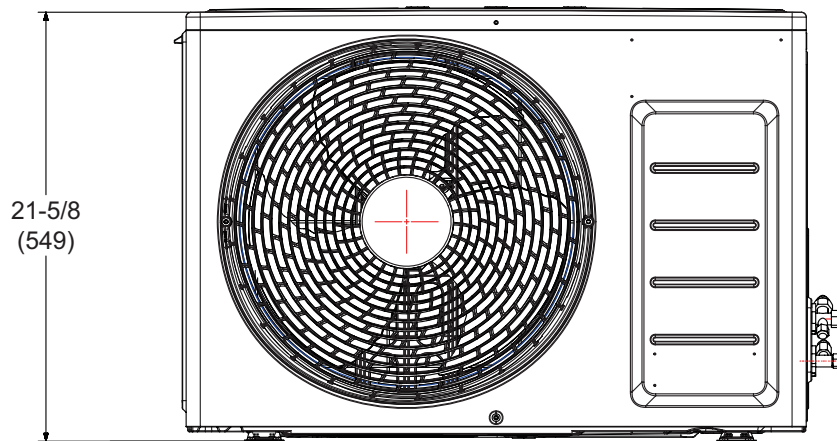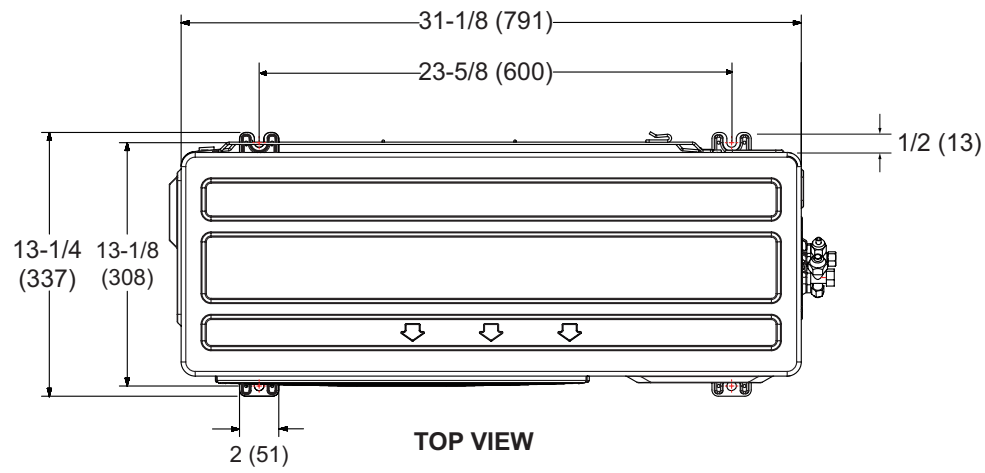


**MWHD015S6S**

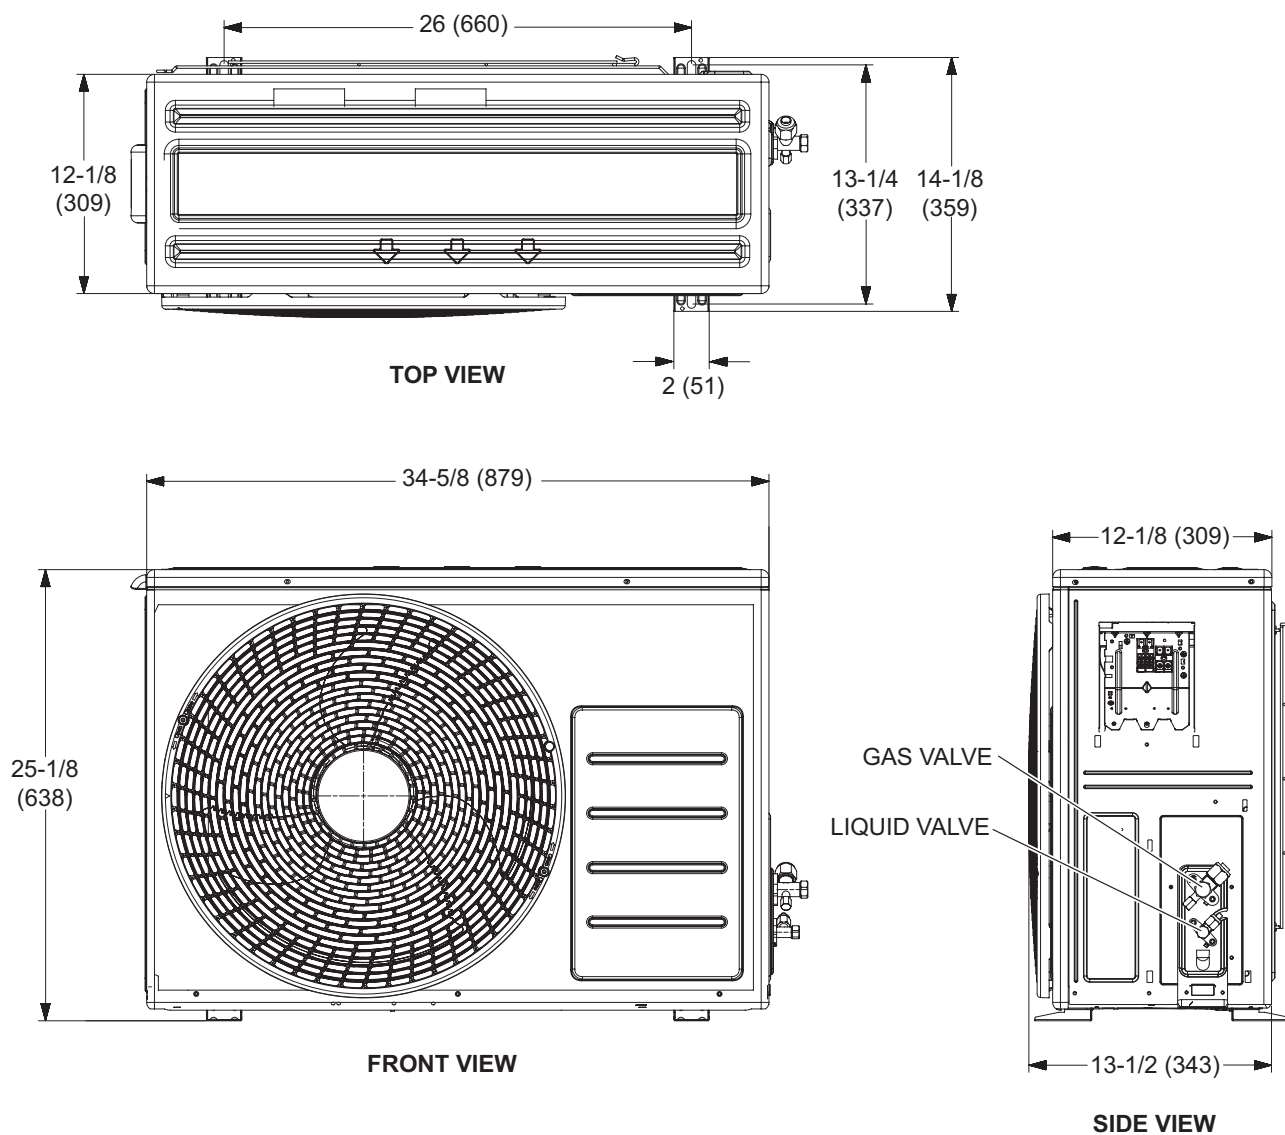


**MWHD018S6S**

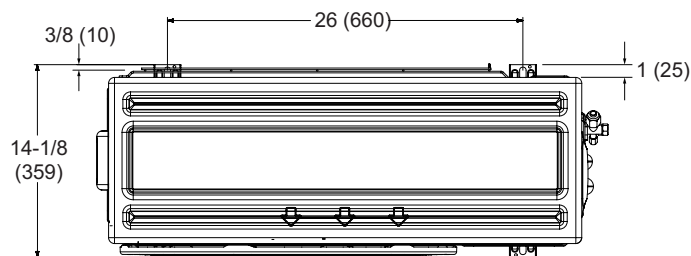


**TOP VIEW**

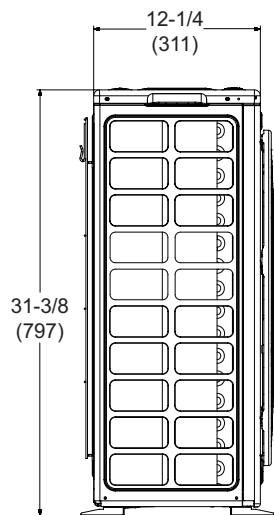


**SIDE VIEW**

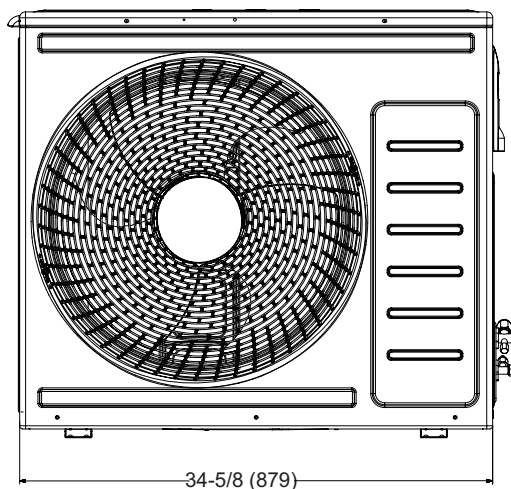

**FRONT VIEW**

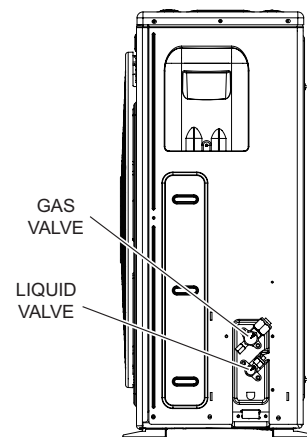


**SIDE VIEW**

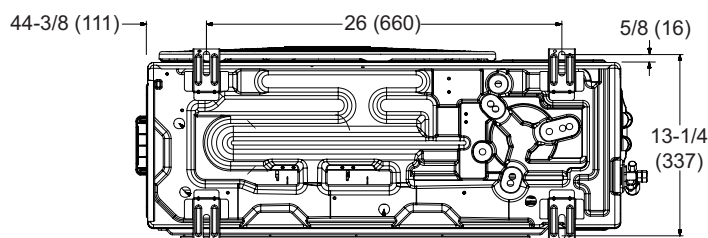


**BOTTOM VIEW**

**MWHD024S6S**

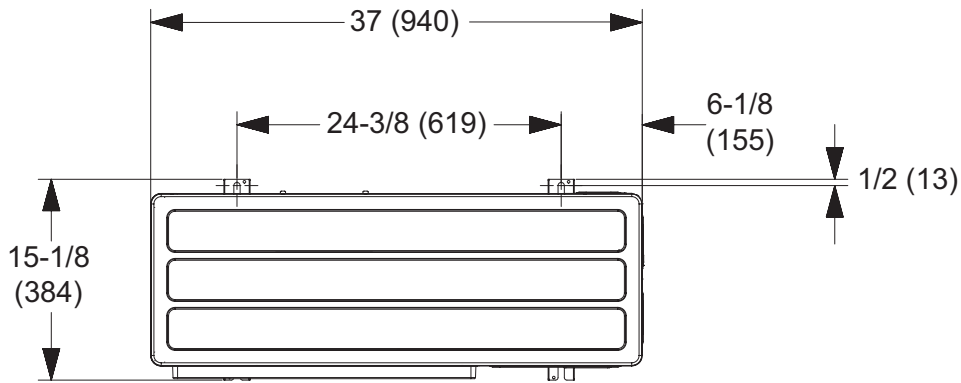


**TOP VIEW**

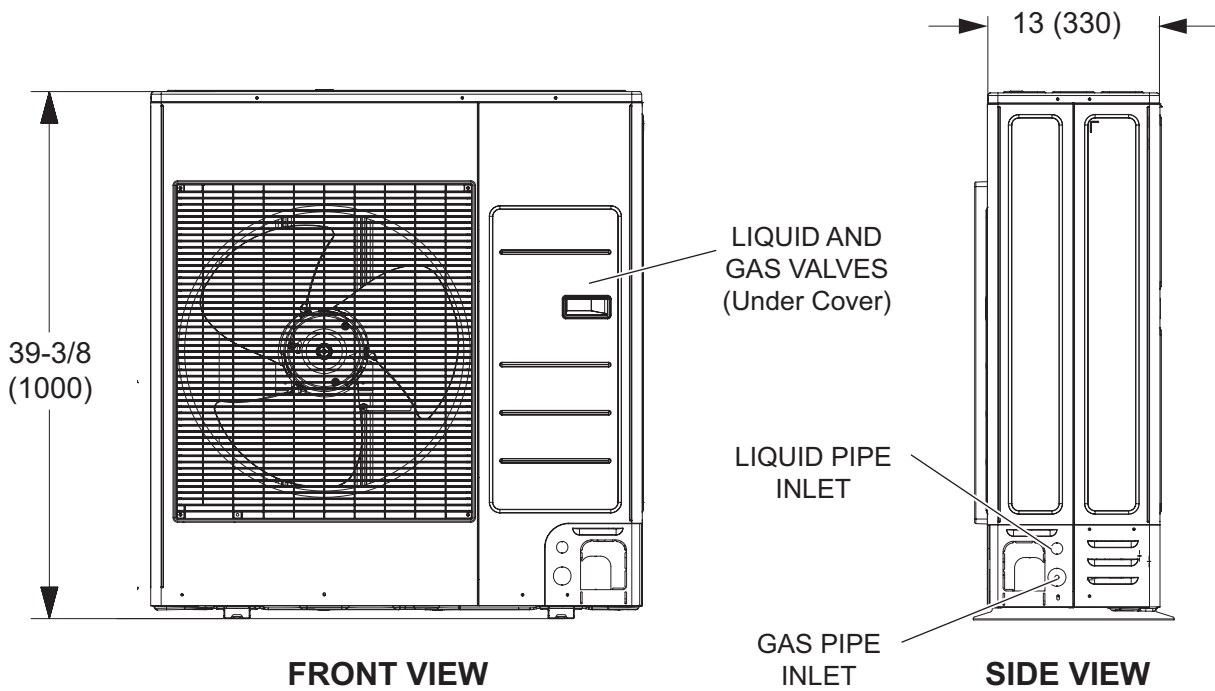


**FRONT VIEW**

**SIDE VIEW**

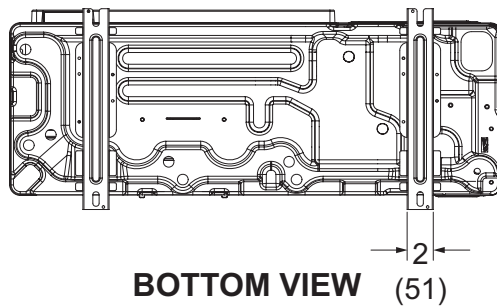


**BOTTOM VIEW** (51)


**MWHD009S6S | MWHD012S6S, MWHD015S6S , MWHD018S6S**

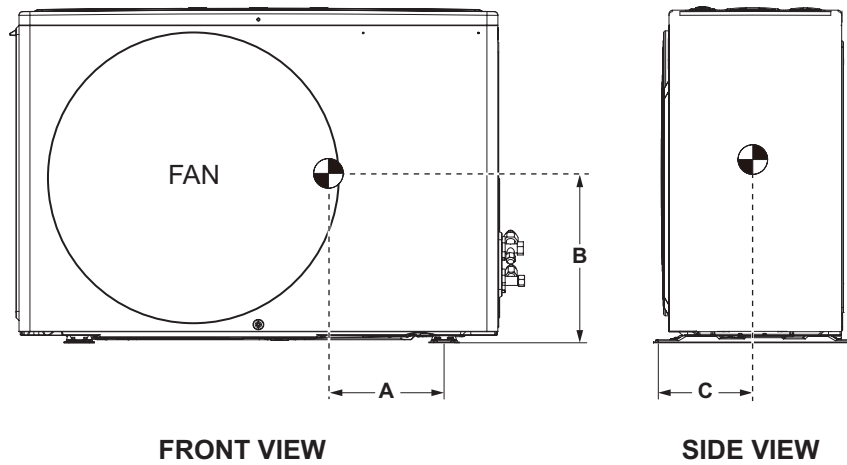


**MWHD024S6S**

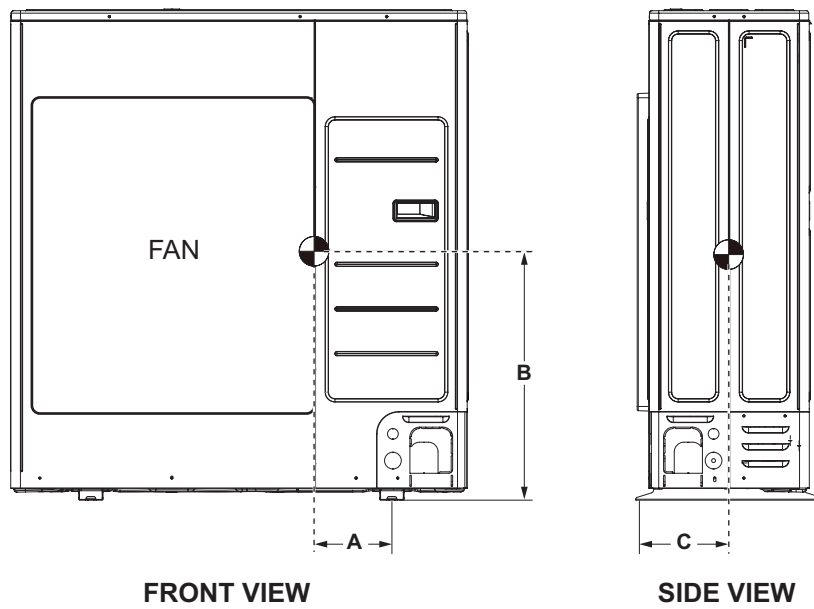


| Dimensions | 009   |     | 012   |     | 015    |     | 018    |     | 024    |     |
|------------|-------|-----|-------|-----|--------|-----|--------|-----|--------|-----|
|            | in.   | mm  | in.   | mm  | in.    | mm  | in.    | mm  | in.    | mm  |
| <b>A</b>   | 7-1/2 | 191 | 7-1/2 | 191 | 8-1/4  | 210 | 9-7/8  | 250 | 8-1/8  | 207 |
| <b>B</b>   | 11    | 279 | 11    | 279 | 13-1/2 | 343 | 13-3/4 | 350 | 17-1/2 | 444 |
| <b>C</b>   | 6-1/8 | 155 | 6-1/8 | 155 | 6-1/8  | 156 | 6-3/8  | 162 | 7      | 178 |

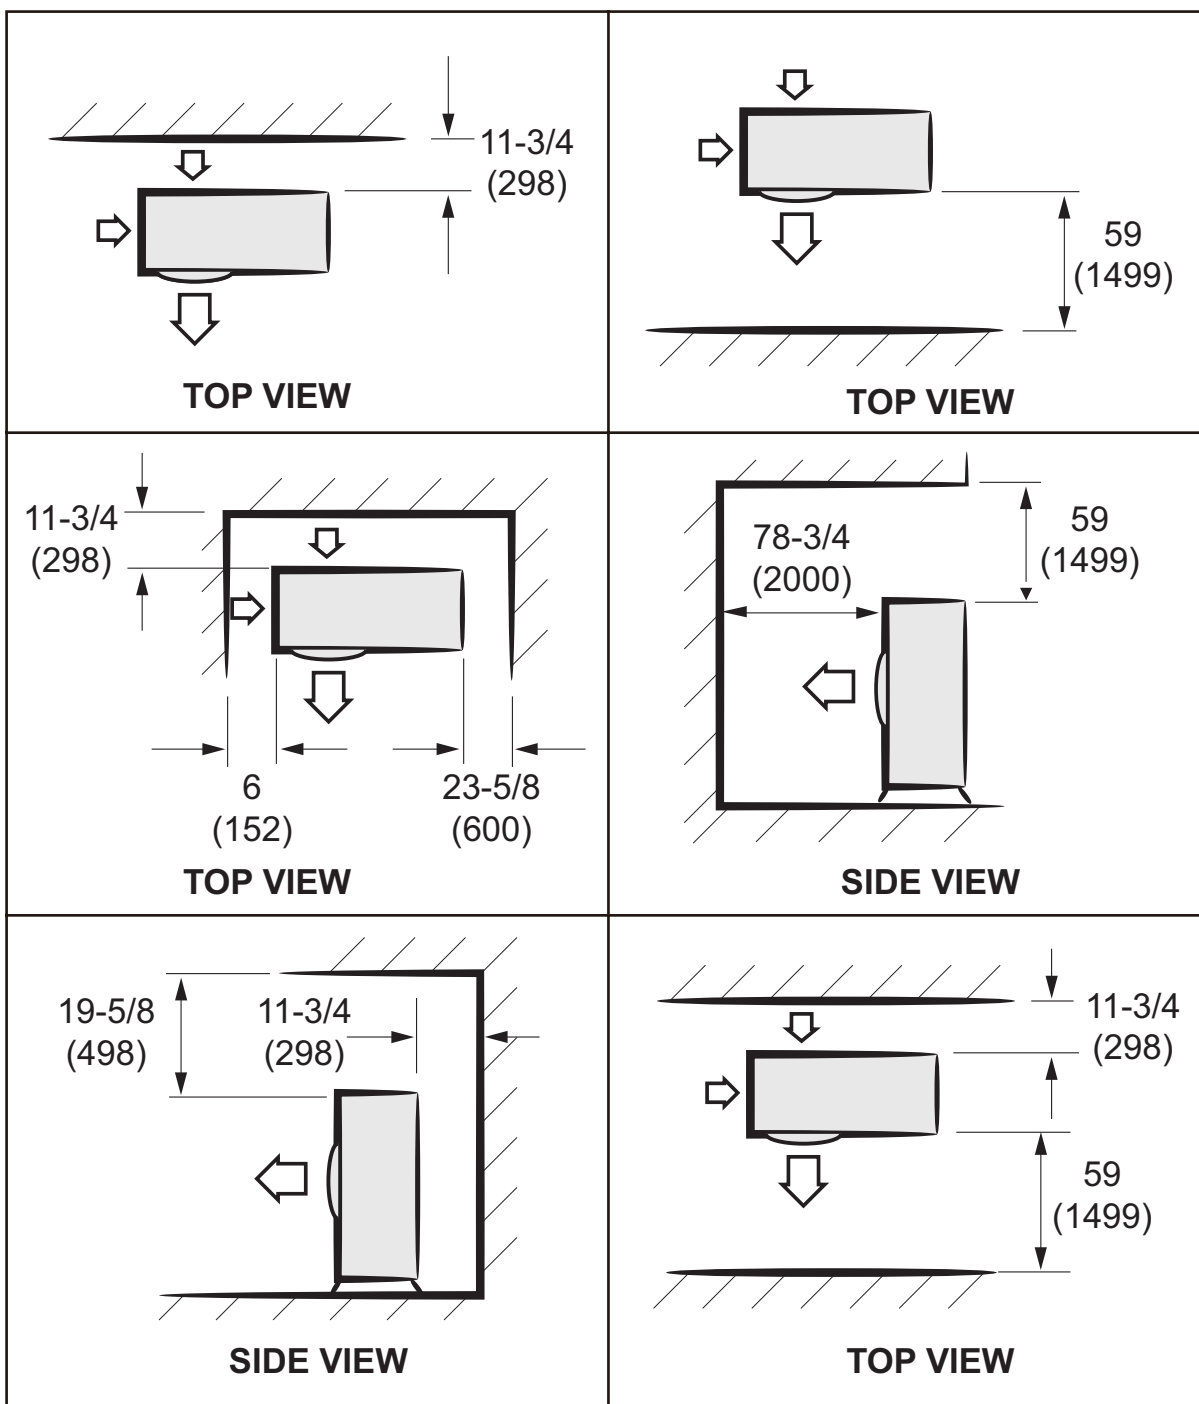

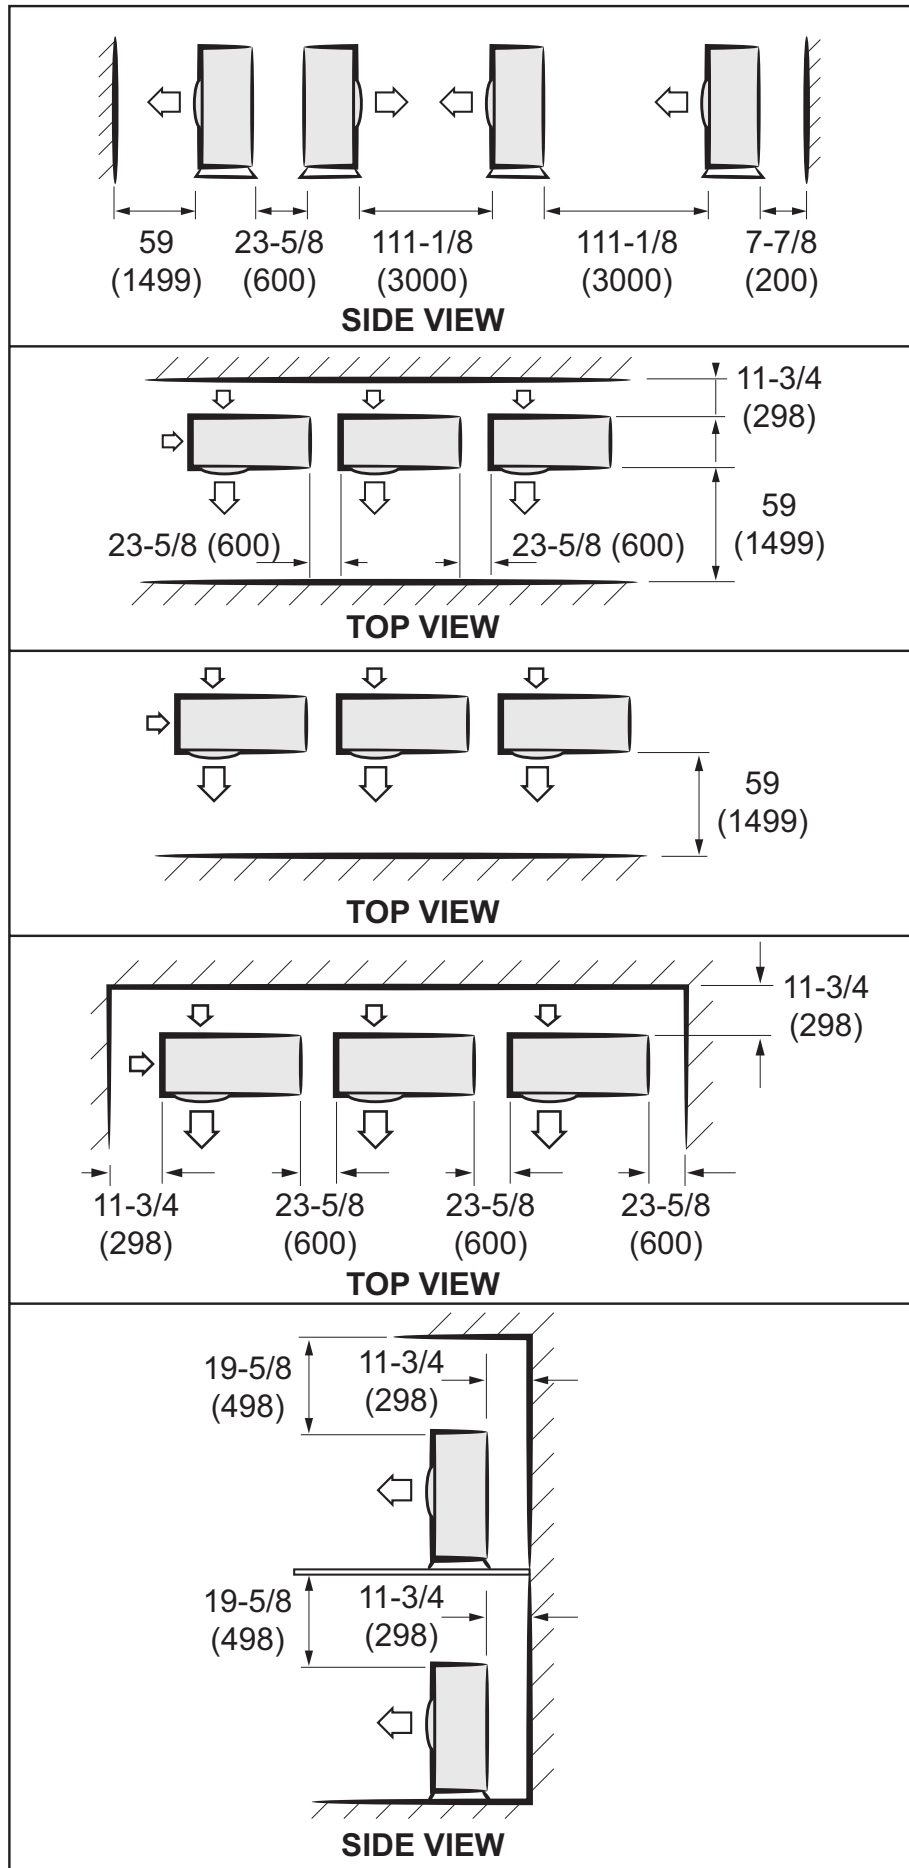

## Sound Pressure level


Unit: dBA

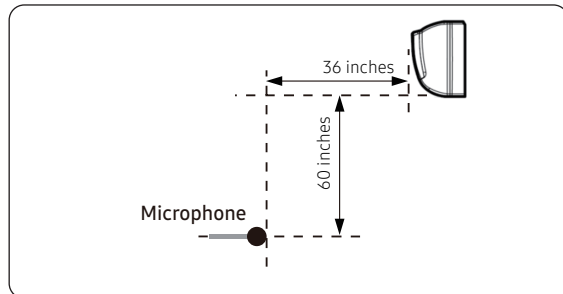


| Model        | Cooling |        |
|--------------|---------|--------|
|              | High    | Silent |
| MWHD009S6-1P | 38      | 22     |
| MWHD012S6-1P | 39      | 22     |
| MWHD015S6-1P | 41      | 27     |
| MWHD018S6-1P | 41      | 27     |
| MWHD024S6-1P | 45      | 30     |

### • NC Curve


1) MWHD009S6-1P

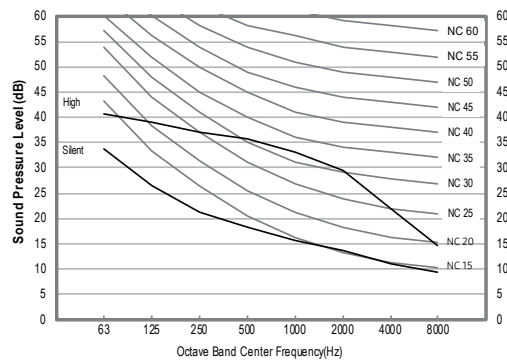


2) MWHD012S6-1P

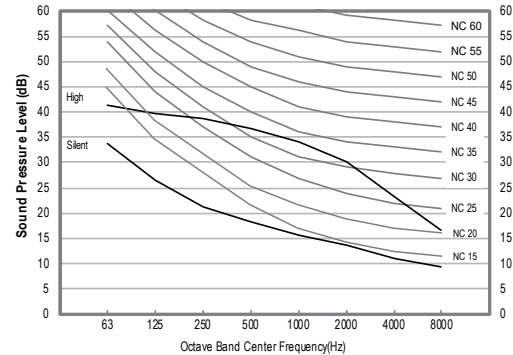


3) MWHD015S6-1P

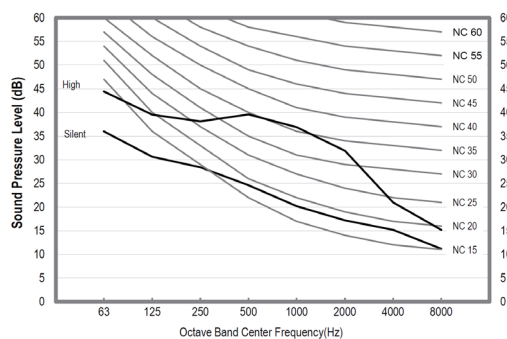

4) MWHD018S6-1P

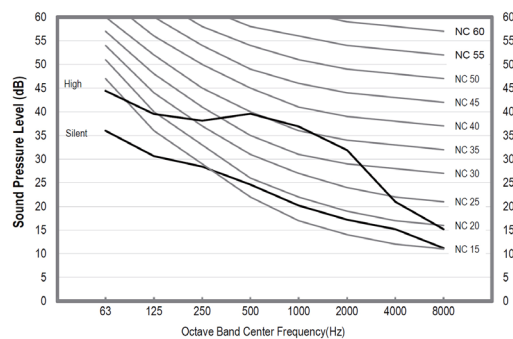

5) MWHD024S6-1P

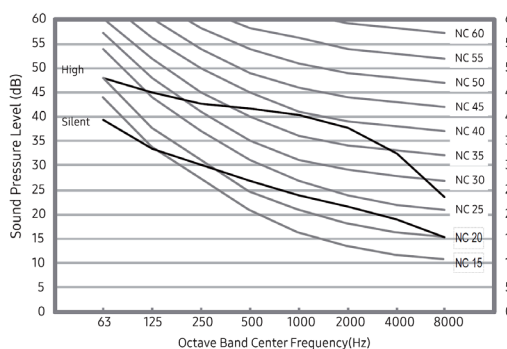


### NOTE


- Specifications may be subject to change without prior notice.
- Sound pressure Level
  - Sound pressure level is obtained in an anechoic room.
  - Sound pressure level is a relative value, depending on the distance and acoustic environment.
  - Sound pressure level may differ depending on operation condition.
  - dBA = A weighted sound pressure level
  - Reference acoustic pressure 0 dB = 20μPa

## OPERATION RANGE

Cooling

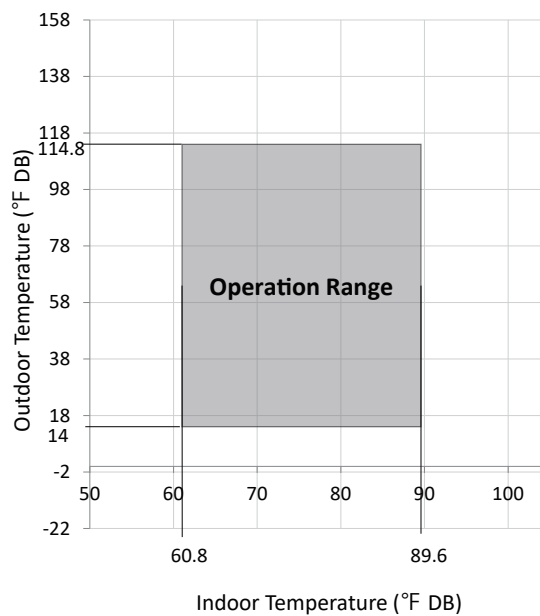


Heating

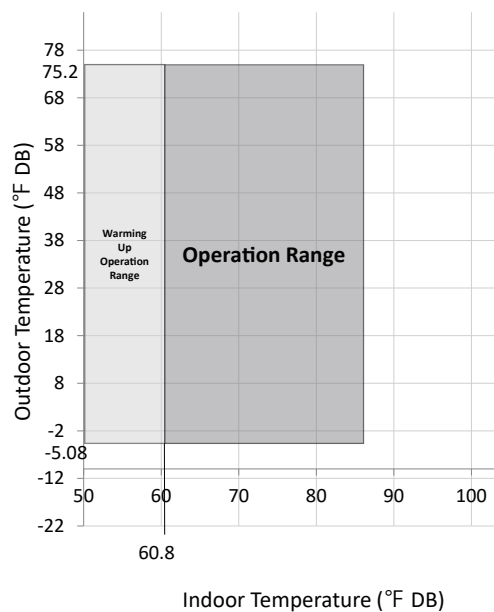


## CAPACITY CORRECTION

9/12KBtu/h

### Cooling

|                                                                                   |                       |     | Pipe Length (ft) |      |      |      |      |
|-----------------------------------------------------------------------------------|-----------------------|-----|------------------|------|------|------|------|
|                                                                                   |                       |     | 16               | 33   | 41   | 49   | 66   |
|  | Level Difference (ft) | 49  | -                | -    | -    | 0.92 | 0.90 |
|                                                                                   |                       | 33  | -                | 0.95 | 0.94 | 0.93 | 0.91 |
|                                                                                   |                       | 23  | -                | 0.96 | 0.95 | 0.94 | 0.92 |
|                                                                                   |                       | 16  | 0.99             | 0.97 | 0.96 | 0.95 | 0.93 |
|                                                                                   |                       | 0   | 1.00             | 0.98 | 0.97 | 0.96 | 0.94 |
|                                                                                   |                       | -16 | 0.99             | 0.97 | 0.96 | 0.95 | 0.93 |
|                                                                                   |                       | -23 | -                | 0.96 | 0.95 | 0.94 | 0.92 |
|                                                                                   |                       | -33 | -                | 0.95 | 0.94 | 0.93 | 0.91 |
|                                                                                   |                       | -49 | -                | -    | -    | 0.92 | 0.90 |


### Heating

|                                                                                     |                       |     | Pipe Length (ft) |      |      |      |      |
|-------------------------------------------------------------------------------------|-----------------------|-----|------------------|------|------|------|------|
|                                                                                     |                       |     | 16               | 33   | 41   | 49   | 66   |
|  | Level Difference (ft) | 49  | -                | -    | -    | 0.92 | 0.90 |
|                                                                                     |                       | 33  | -                | 0.95 | 0.94 | 0.93 | 0.91 |
|                                                                                     |                       | 26  | -                | 0.96 | 0.95 | 0.94 | 0.92 |
|                                                                                     |                       | 16  | 0.99             | 0.97 | 0.96 | 0.95 | 0.93 |
|                                                                                     |                       | 0   | 1.00             | 0.98 | 0.97 | 0.96 | 0.94 |
|                                                                                     |                       | -16 | 0.99             | 0.97 | 0.96 | 0.95 | 0.93 |
|                                                                                     |                       | -26 | -                | 0.96 | 0.95 | 0.94 | 0.92 |
|                                                                                     |                       | -33 | -                | 0.95 | 0.94 | 0.93 | 0.91 |
|                                                                                     |                       | -49 | -                | -    | -    | 0.92 | 0.90 |


## CAPACITY CORRECTION

15/18/24KBtu/h

### Cooling

|                                                                                   |                       | Pipe Length (ft) |      |      |      |      |      |      |
|-----------------------------------------------------------------------------------|-----------------------|------------------|------|------|------|------|------|------|
|                                                                                   |                       | 16               | 33   | 41   | 49   | 66   | 82   | 98   |
|  | Level Difference (ft) | 66               | -    | -    | -    | -    | 0.87 | 0.85 |
|                                                                                   |                       | 49               | -    | -    | 0.92 | 0.90 | 0.88 | 0.86 |
|                                                                                   |                       | 33               | -    | 0.95 | 0.94 | 0.93 | 0.91 | 0.89 |
|                                                                                   |                       | 23               | -    | 0.96 | 0.95 | 0.94 | 0.92 | 0.9  |
|                                                                                   |                       | 16               | 0.99 | 0.97 | 0.96 | 0.95 | 0.93 | 0.91 |
|                                                                                   |                       | 0                | 1.00 | 0.98 | 0.97 | 0.96 | 0.94 | 0.92 |
|                                                                                   |                       | -16              | 0.99 | 0.97 | 0.96 | 0.95 | 0.93 | 0.91 |
|                                                                                   |                       | -23              | -    | 0.96 | 0.95 | 0.94 | 0.92 | 0.9  |
|                                                                                   |                       | -33              | -    | 0.95 | 0.94 | 0.93 | 0.91 | 0.89 |
|                                                                                   |                       | -49              | -    | -    | 0.92 | 0.90 | 0.88 | 0.86 |
|                                                                                   |                       | -66              | -    | -    | -    | -    | 0.87 | 0.85 |

### Heating

|                                                                                     |                       | Pipe Length (ft) |      |      |      |      |      |      |
|-------------------------------------------------------------------------------------|-----------------------|------------------|------|------|------|------|------|------|
|                                                                                     |                       | 16               | 33   | 41   | 49   | 66   | 82   | 98   |
|  | Level Difference (ft) | 66               | -    | -    | -    | -    | 0.87 | 0.85 |
|                                                                                     |                       | 49               | -    | -    | 0.92 | 0.90 | 0.88 | 0.86 |
|                                                                                     |                       | 33               | -    | 0.95 | 0.94 | 0.93 | 0.91 | 0.89 |
|                                                                                     |                       | 23               | -    | 0.96 | 0.95 | 0.94 | 0.92 | 0.9  |
|                                                                                     |                       | 16               | 0.99 | 0.97 | 0.96 | 0.95 | 0.93 | 0.91 |
|                                                                                     |                       | 0                | 1.00 | 0.98 | 0.97 | 0.96 | 0.94 | 0.92 |
|                                                                                     |                       | -16              | 0.99 | 0.97 | 0.96 | 0.95 | 0.93 | 0.91 |
|                                                                                     |                       | -23              | -    | 0.96 | 0.95 | 0.94 | 0.92 | 0.9  |
|                                                                                     |                       | -33              | -    | 0.95 | 0.94 | 0.93 | 0.91 | 0.89 |
|                                                                                     |                       | -49              | -    | -    | 0.92 | 0.90 | 0.88 | 0.86 |
|                                                                                     |                       | -66              | -    | -    | -    | -    | 0.87 | 0.85 |

## REVISIONS

| Sections    | Description of Change   |
|-------------|-------------------------|
| Mobile Apps | Added Lennox® Home App. |



Visit us at [www.Lennox.com](http://www.Lennox.com)

For the latest technical information, [www.LennoxPros.com](http://www.LennoxPros.com)

Contact us at 1-800-9-LENNOX

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

©2025 Lennox Industries, Inc.