

SUBMITTAL DATA - INDOOR UNIT VWMC032\$4-4P

VRF Ductless Wall Mounted

Job:	E	ngine	er:			
Location:	Α	rchite	ect:			
Schedule No.:	L	ocatio	on:			
System Designation:	D	ate:				
		or:	Reference	Approval	Review	Construction

Wall Mounted Ductless Indoor Unit

FEATURES

- Turbo Cooling Mode 4-Way Swing
 - Full HD Filter
- Advanced Commissioning and Service
- Compatible with VRF air and water source products

WARRANTY

• Refrigerant R-410A

• 10-year limited warranty.*See warranty for details.

SPECIFICATIONS						
PERFORMANCE						
Cooling Capacity ¹ (Btu/h)	31,700					
Heating Capacity ¹ (Btu/h)	33,400					
Airflow (CFM)	Low/Medium/High	600/706/812				
External Static Pressure	0					
(in. WC)						
Sound (dBA)	Low/Medium/High	42/46/49				
ELECTRICAL DATA						
Power Supply (Volts/Hertz	208-230/60/1					
Minimum Circuit Ampacity	0.54					
Maximum Overcurrent Pro	15					
Cooling Power Input ² (W)	66					
Cooling Rated Current (A	0.47					
Heating Power Input ² (W)	76					
Heating Rated Current (A	0.54					
Fan Motor Output (W)	58 x 1					
DIMENSIONS						
Unit Dimensions (in)	Width	50-3/8				
	Height	13-9/16				
	Depth	9-5/16				
Liquid Pipe Connection (in	3/8					
Gas Pipe Connection (in)	5/8					
Net Weight (lb)	40.8					
Shipping Weight (lb)	48.5					

OPTIONAL ACCESSORIES			
VSTAT02P-1 Touch Screen Wired Controller	37P79		
VSTAT04P-1 Individual Wired Controller	37Y74		
VSTAT01P-1 Wireless Remote Controller	37Y73		



NOTES

- 1. Mode : HP(Heat Pump), HR(Heat Recovery)
- Nominal Cooling: Indoor temperature 26.7°CDB / 19.4° CWB(80°F DB/67°F WB), Outdoor temperature 35°CDB / 23.9°CWB(95°F DB/75°F WB), Refrigerant pipe length 7.5m(25ft), Level difference 0m(0ft).
- Nominal Heating: Indoor temperature 21.1°CDB / 15.6° CWB(70°F DB/60°F WB), Outdoor temperature 8.3°CDB / 6.1°CWB(47°F DB/43°F WB), Refrigerant pipe length 7.5m(25ft), Level difference 0m(0ft).
- Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.
- These products contain R410A which is fluorinated greenhouse gas.
- 6. Select wire size based on the value of MCA








SUBMITTAL DATA - INDOOR UNIT VWMC032\$4-4P

VRF Ductless Wall Mounted

DIMENSIONAL DRAWINGS - MM (Inches)

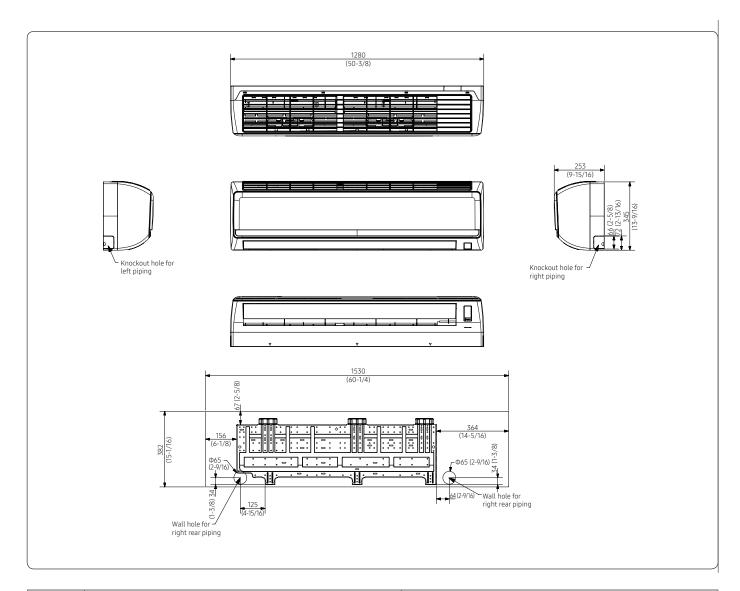

No.	Name	Description
1	Liquid pipe connection	9.52 (3/8")
2	Gas pipe connection	15.88 (5/8")
3	Drain pipe connection	ID 18 HOSE
4	Power supply & Communication wiring conduit	-