

Job: _____
Location: _____
Schedule No.: _____
System Designation: _____

Engineer: _____
Architect: _____
Location: _____
Date: _____

For: Reference Approval Review Construction

Wall Mounted Ductless Indoor Unit

FEATURES

- Temperature Display
- 4-Way Swing
- Advanced Commissioning and Service
- Compatible with VRF air and water source products
- Refrigerant R-32
- Washable filter included
- Nine capacity sizes from 5,000 to 32,000 Btu/h

WARRANTY

- 10-year limited warranty.*See warranty for details.

SPECIFICATIONS

PERFORMANCE

Cooling Capacity ¹ (Btu/h)		31,700
Heating Capacity ¹ (Btu/h)		33,400
Airflow (CFM)	Low/Medium/High	600/706/812
External Static Pressure (in. WC)		0
Sound (dBA)	Low/Medium/High	42/46/49

ELECTRICAL DATA


Power Supply (Volts/Hertz/Phase)	208-230/60/1
Minimum Circuit Ampacity (MCA)	0.68
Maximum Overcurrent Protection (MOCP)	15
Cooling Power Input ² (W)	66
Cooling Rated Current (A)	0.47
Heating Power Input ² (W)	76
Heating Rated Current (A)	0.54
Fan Motor Output (W)	58 x 1

DIMENSIONS

Unit Dimensions (in)	Width	50.4
	Height	13.6
	Depth	10.0
Liquid Pipe Connection (in) (I.D.)		3/8
Gas Pipe Connection (in) (I.D.)		5/8
Net Weight (lb)		41.9
Shipping Weight (lb)		48.5

OPTIONAL ACCESSORIES

VSTAT02P-1 Touch Screen Wired Controller	37P79
VSTAT04P-1 Individual Wired Controller	37Y74
VSTAT01P-1 Wireless Remote Controller	37Y73

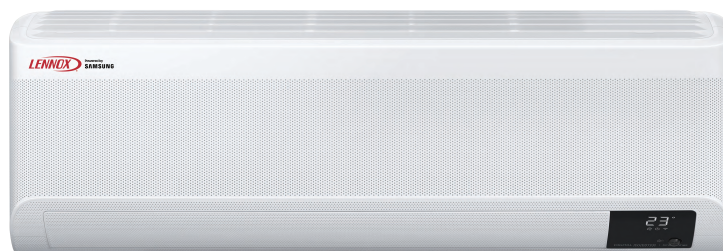

NOTES

*Specification may be subject to change without prior notice.

1)Performances are based on the following test conditions.

-Cooling : Indoor temperature : 80°F(26.7°C) DB, 67°F(19.4°C)

WB, Outdoor temperature : 95°F(35°C) DB, 75°F(23.9°C) WB

-Heating : Indoor temperature : 70°F(21.1°C) DB, 60°F(15.6°C)

WB, Outdoor temperature : 47°F(8.3°C) DB, 43°F(6.1°C) WB

-Equivalent refrigerant piping length 7.5m(24.6ft), Level differences : 0m(0ft)

2)Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.


3)These products contain R32 (GWP=675) which is fluorinated greenhouse gas.

4)Select wire size based on the value of MCA




DIMENSIONAL DRAWINGS - MM (Inches)

Unit : mm [inch]

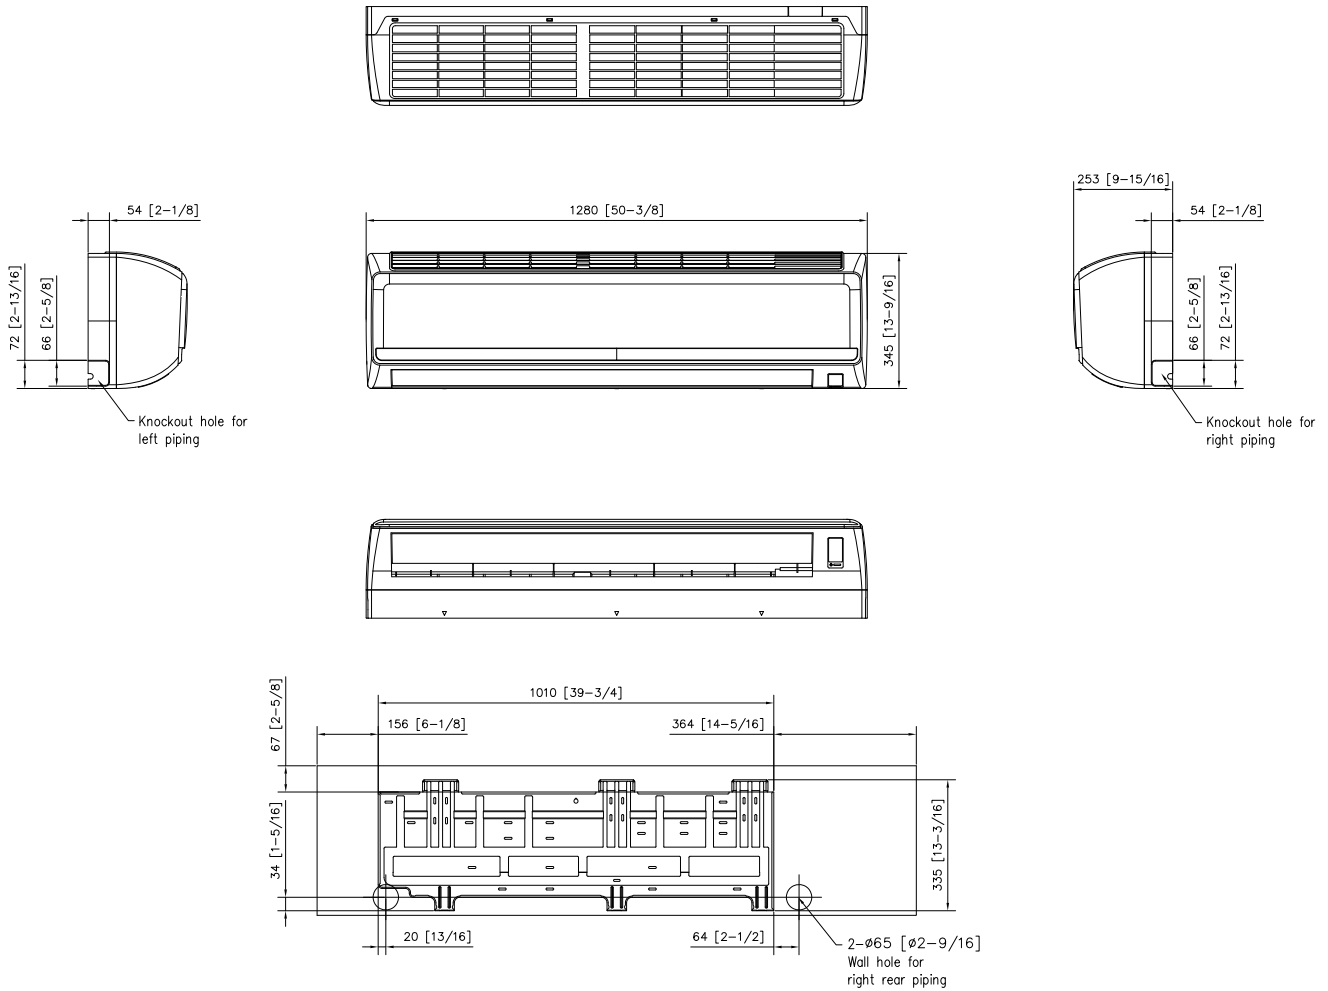

Unit : mm [inch]

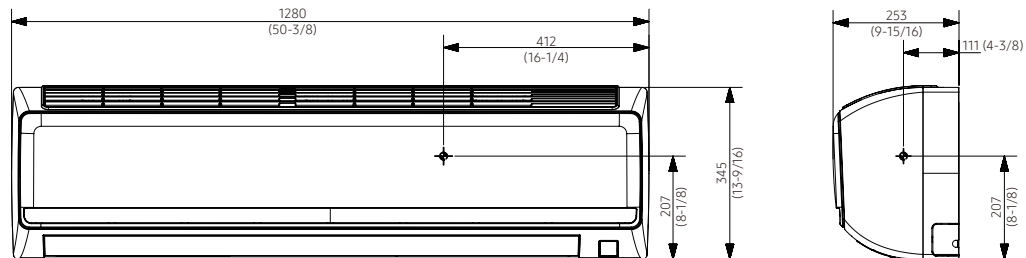

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

496265 (202412)

©2024 Lennox Industries Inc.