

## SUBMITTAL DATA - WALL-MOUNTED

# MWMC024S4-1P

### MULTI-ZONE MINI-SPLIT HEAT PUMP

Engineer:	
Architect:	
Date:	
For: Reference Reproval Review Construction	

#### **FEATURES**

Job:
Location:
Schedule No.:
System Designation:

- Pre Heat Function
- Multi-Refrigerant Outlet
- Auto Restart
   Three Speed Fan
- Flare Connections
- Refrigerant R-410A
- LED Readout Panel
- Wireless Remote Controller included

#### **Product Warranty**

All covered components - Twelve year limited warranty. Product registration required.

Product registration required.				
SPECIFICATIONS				
PERFORMANCE				
Cooling Capacity <sup>1</sup> (Btu/h)		24,000		
Heating Capacity <sup>1</sup> (Btu/h)		24,000		
Airflow (CFM)	High	611		
	Medium	414		
	Low	319		
External Static Pressure (in. w.g.)				
Sound Pressure (dBA)	High	44.0		
	Medium	39.5		
	Low	34.0		
ELECTRICAL DATA				
Power Supply (V/Hz/Φ)		208-230/60/1		
Power Supply (V/Hz/Φ) Rated load amps (RLA)		208-230/60/1 0.50		
Rated load amps (RLA)		0.50		
Rated load amps (RLA) Power Output (W)	Height	0.50		
Rated load amps (RLA) Power Output (W) DIMENSIONS	Height Width	0.50 58		
Rated load amps (RLA) Power Output (W) DIMENSIONS		0.50 58 14-5/8		
Rated load amps (RLA) Power Output (W) DIMENSIONS	Width	0.50 58 14-5/8 46-7/8		
Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in)	Width	0.50 58 14-5/8 46-7/8 11		
Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in)	Width Depth	0.50 58 14-5/8 46-7/8 11 3/8		
Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in)  Liquid Pipe Connection (in) Gas Pipe Connection (in)	Width Depth	0.50 58 14-5/8 46-7/8 11 3/8 5/8		
Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in)  Liquid Pipe Connection (in) Gas Pipe Connection (in) Condensate drain connection	Width Depth	0.50 58 14-5/8 46-7/8 11 3/8 5/8		



OPTIONAL ACCESSORIES
Non-Programmable Controller (M0STAT61Q-1)
Non-Programmable Controller (M0STAT120L-1)
Programmable Controller (M0STAT64Q-2)

#### **NOTES**

1. Cooling and Heating capacity data is rated at the following conditions:

Cooling: 80°FDB / 67°FWB Indoor, 95°FDB Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor










# SUBMITTAL DATA - WALL-MOUNTED


**MWMC024**S4-**1**P

MULTI-ZONE MINI-SPLIT HEAT PUMP


DIMENSIONAL DRAWINGS - INCHES (MM)



**SIDE VIEW** 

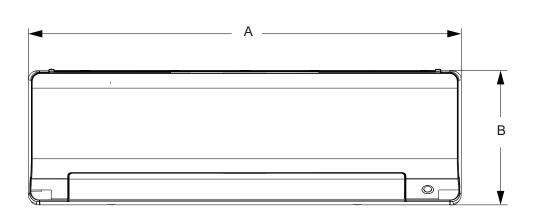

**FRONT VIEW** 

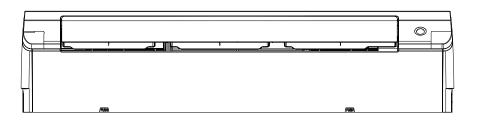

**BOTTOM VIEW** 

Size	A	Α		В		С	
Size	in.	mm	in.	mm	in.	mm	
MWMC009, 012	33-3/8	848	11-3/4	298	9	229	
MWMC018	40	1016	12-1/2	318	9-1/2	241	
MWMC024, 030	46-7/8	1191	14-5/8	371	11	279	