


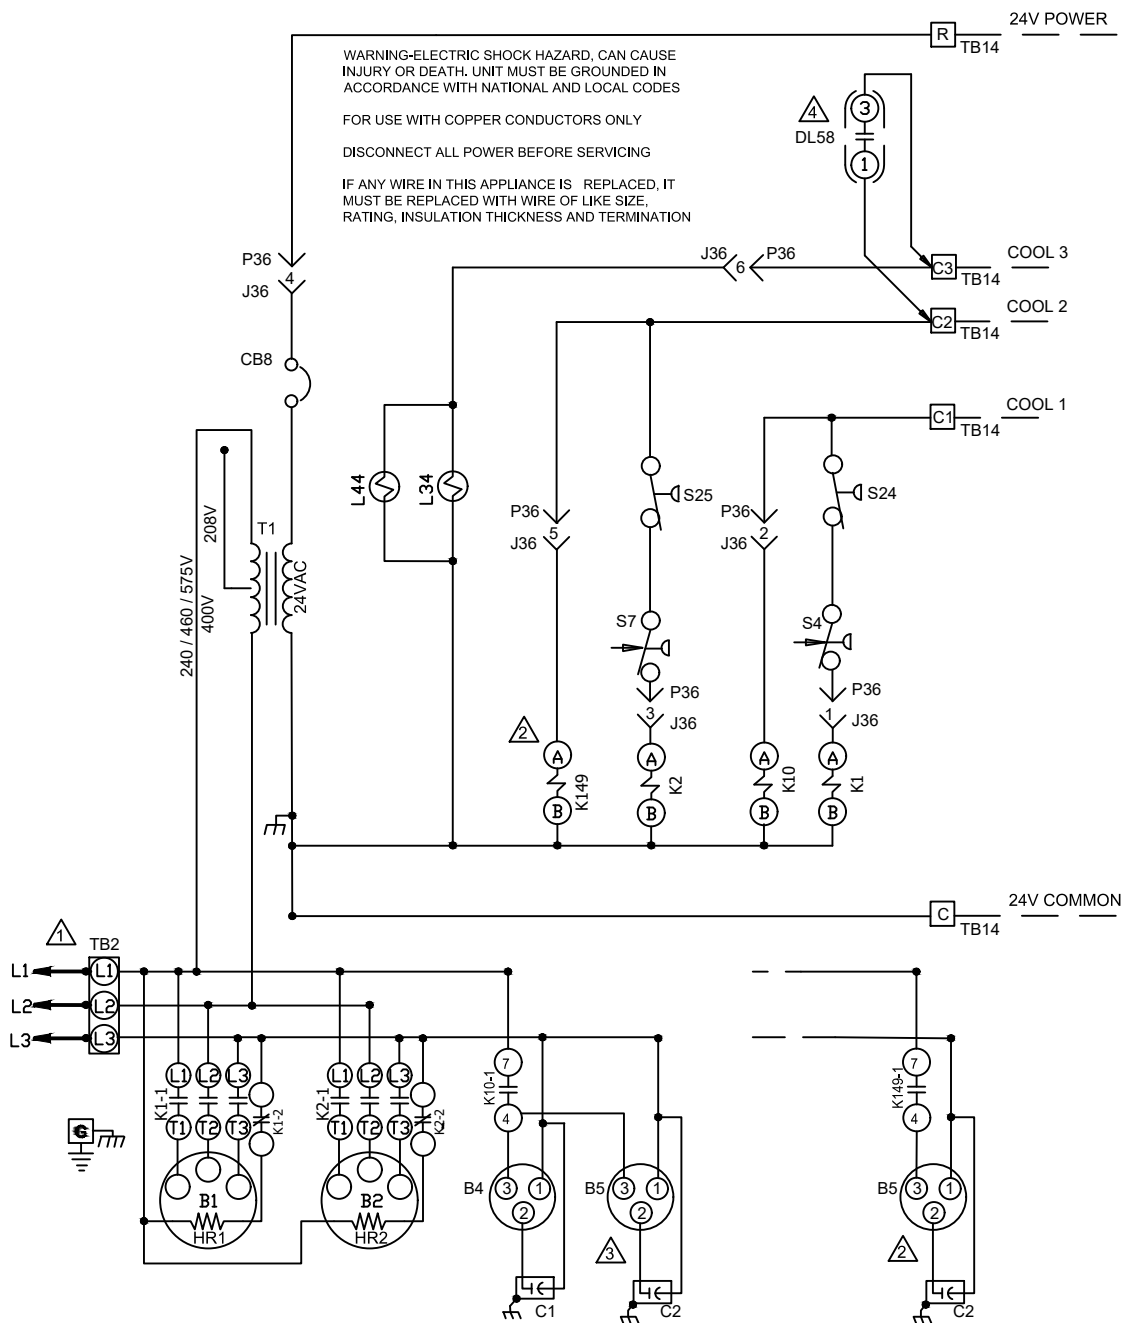

KEY	COMPONENT
B1	COMPRESSOR 1
B2	COMPRESSOR 2
B4	MOTOR, OUTDOOR FAN 1
B5	MOTOR, OUTDOOR FAN 2
C1	CAPACITOR, OUTDOOR FAN 1
C2	CAPACITOR, OUTDOOR FAN 2
CB8	CIRCUIT, BREAKER T1
DL58	DELAY, ADJUSTABLE, ON MAKE
HR1	HEATER COMPRESSOR 1
HR2	HEATER COMPRESSOR 2
J36	JACK-TEST, COOL
P36	PLUG-TEST, COOL
K1, -1,2	CONTACTOR, COMPRESSOR 1
K2, -1,2	CONTACTOR, COMPRESSOR 2
K10, -1	RELAY, OUTDOOR FAN 1, 2
K149, -1	RELAY, OUTDOOR FAN 2
L34	SOLENOID, TWO STAGE, COMP. 1

KEY	COMPONENT
L44	SOLENOID, TWO STAGE, COMP. 2
S4	SWITCH, LIMIT HI PRESS COMPRESS 1
S7	SWITCH, LIMIT HI PRESS COMPRESS 2
S24	SWITCH, LOSS OF CHARGE COMPRESS 1
S25	SWITCH, LOSS OF CHARGE COMPRESS 2
T1	TRANSFORMER, CONTROL
TB2	TERMINAL STRIP, UNIT
TB14	TERMINAL STRIP-CLASS II VOLTAGE

DENOTES OPTIONAL COMPONENTS
 LINE VOLTAGE FIELD INSTALLED
 CLASS II FIELD WIRING

REFER TO UNIT RATING PLATE FOR MINIMUM CIRCUIT AMPCITY AND MAXIMUM OVERCURRENT PROTECTION
 150 ONLY
 120 ONLY
 DL58 DELAY MAY BE FIELD SUPPLIED OR USE AVAILABLE KIT

2022/10		WIRING DIAGRAM	10/22
537904-03			
DUAL SPEED COMPRESSOR			
EL120-150XCSDT - G,J,Y			
SECTION A 3			REV. 1
Supersedes	New Form No.		
537904-02	537904-03		