

Job:

Location:

Schedule No.:

System Designation:

Engineer:

Architect:

Location:

Date:

Wi-Fi Adapter

FEATURES AND FUNCTIONS

- Wi-Fi adaptor to allow remote control and monitoring of R-410A Lennox Powered by Samsung indoor units
- System Connectivity
 - Single Wi-Fi adaptor to control and monitor up to 16 indoor units across multiple systems
 - Maximum 16 Wi-Fi adaptors for single VRF system (control up to 64 indoor units) - S-Convertor and LNET service software required to configure connection of multiple WiFi-adaptors to VRF systems
- User Accounts
 - Maximum 200 accounts, Wi-Fi adaptor quantity per account: 200 units
- Features and Functions
 - Control and monitor indoor unit (individual/group/scene): power status, mode, set temperature, room temperature, fan speed, and supply air louver position
 - Individual power monitoring up to 16 outdoor units (outdoor module can be monitored)
 - Power consumption trend (daily/weekly/monthly)¹
 - 7 Day scheduling for a single unit or multiple indoor units
 - Logic control with automation
 - Geo-fencing capable
 - Voice control via mobile device (compatible with Bixby2.0 and above and other voice control services) - Firmware update by using Micro SD card

WARRANTY

- All covered components - 1-year limited warranty. *See warranty for details.

SPECIFICATIONS

PERFORMANCE

Input Voltage (V) 12 VDC

4 wire connection to an indoor unit


DIMENSIONS

Unit Dimensions (in)	Height	5-1/8
	Width	7-9/32
	Depth	1-1/8

For: Reference Approval Review Construction



Dimensions

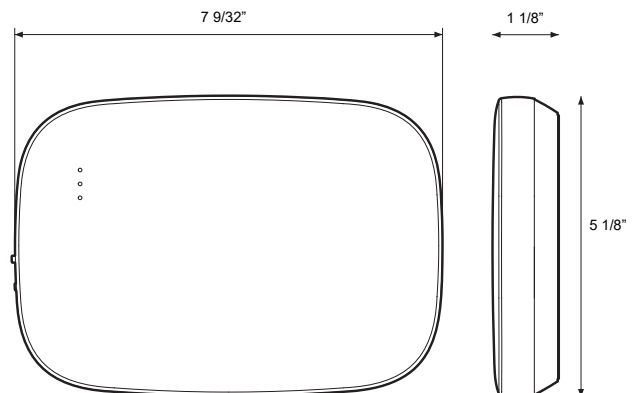

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability.

Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury.

Installation and service must be performed by a qualified installer and servicing agency.

496351 (202412)

©2024 Lennox Industries Inc.