

# Submittal Data MFMD009S6-1P (CNG09JDD) Floor Mount Unit

Job Name: \_\_\_\_\_  
Purchaser: \_\_\_\_\_  
Submitted to: \_\_\_\_\_  
Unit designation: \_\_\_\_\_

Location: \_\_\_\_\_  
Engineer: \_\_\_\_\_  
Reference \_\_\_\_\_ Approval \_\_\_\_\_ Construction \_\_\_\_\_  
Schedule #: \_\_\_\_\_

## General Information

- The unit shall have a built-in Wi-Fi adapter as standard to allow control and monitoring using the Samsung SmartThings app.
- The outdoor unit shall provide 208/230V power to the indoor unit via 14 AWG X 3 interconnect power cable.
- The front panel shall have LED indicator lights, touch controls, IR receiver, and 1 motorized louver.

## Construction

- Insulated, HIPS chassis certified to UL94 V0

## Refrigerant System

- The heat exchanger shall be mechanically boded aluminum fin to copper tube.
- Refrigerant flow shall be controlled by an electronic expansion valve at the outdoor unit
- The system shall include an R32 alarm output plug on the indoor unit and outdoor unit for notification of R32 leak detection when the indoor unit refrigerant leak detector detects a refrigerant leak (VSTAT10P-1 accessory is required).

## Indoor Fan

- Three fan speed settings and auto settings
- The unit shall discharge cool air from the upper outlet louver (motorized) while in cooling mode and warm air from the upper and lower (manual adjustment only) outlets while in heating mode.

## Controls

- Control wiring shall be 2 X 16 AWG.
- The unit shall be operated via a wireless or wired remote control with DDC-type signal
- The indoor unit shall ship with a rechargeable, solar-cell wireless controller and holder. The wireless controller battery shall be charged with a USB C cable or the integral solar panel.
- The included wireless controller shall have a pixel display that is visible in low light conditions.
- Dual set temperature support when connected to supported controllers.



## External Heat Control

- External heat control functionality allows for configuration of fan operation during auxiliary heat operation, defrost, and emergency heat (VSTAT10P-1 accessory required).
- External heat control configuration settings include outside ambient external heat lockout, outside ambient compressor lockout, and time delay options (VSTAT10P-1 accessory required).
- Emergency heat functionality allows the system to continue controlling the external heat source even when system errors prevent the heat pump from operating (VSTAT10P-1 accessory required).
- External heat control functionality allows for configuration of fan operation during auxiliary heat operation, defrost, and emergency heat
- Emergency heat functionality allows the system to continue controlling the external heat source even when system errors prevent the heat pump from operating

## Convenience

- Washable main filter as standard
- Emergency Temperature Output (ETO) function: when indoor unit is in error status or when room temperature exceeds a configurable temperature level, the system outputs a signal to an external source (e.g., backup system, building management system, alert device like status light, warning lamp, or buzzer).



Intertek

## Specifications

Model	US Code		CNG09JDD
	Model Number		MFMD009S6-1P
Performance	Nominal Capacity	Cooling (Btu/h)	9,000
		Heating (Btu/h)	10,100
Power	Voltage	ø / V / Hz	1 / 208-230 / 60
	Operating Current (max.)	Cooling (A)	0.49
		Heating (A)	0.49
Evaporator Fan	Type		BLDC motor with turbo fan
	Consumption	Watts	35
Airflow	Air Volume (L/M/H/Turbo)	Cooling (CFM)	212 / 240 / 265
		Heating (CFM)	219 / 254 / 300
Refrigerant	Type		R-32
	A2L Leak Detection		Integral
Pipe Connections	Indoor & Outdoor	High side (In.)	1/4
		Low side (In.)	3/8
	Condensate Connection		ID 1"
Dimensions	W X H X D	In.	28 3/8 X 24 3/8 X 7 13/16
	Weight	lbs.	34.60
Operating Temperatures	Indoor	Cooling	64 ~ 90°F (16 ~ 32°C)
		Heating	T ≤ 86°F (30°C)
Sound Pressure Level	Low / Med. / High	dB(A)	29 / 31 / 35
Safety	Certifications		UL 60335-2-40


## Accessories

Wired controller	Advanced	VSTAT04P-1
	Touchscreen	VSTAT02P-1
Thermostat adapter (for connection to standard 24VAC thermostats)		VSTAT09P-1
External temperature sensor		VCTRL11P-1
External contact control interface module		VSTAT10P-1

# Dimensional Drawing

## MFMD009S6-1P (CNG09JDD)

Unit: Inches

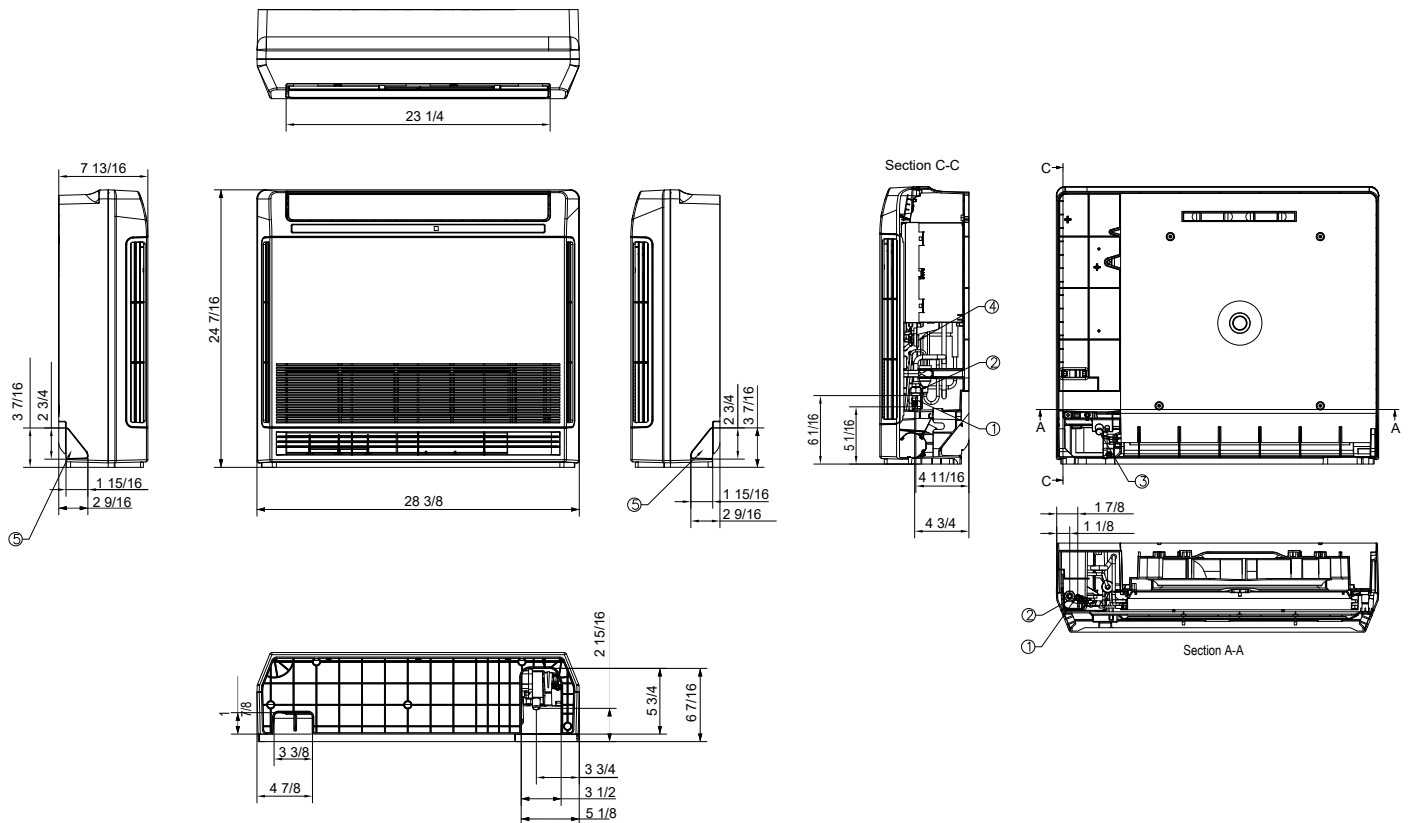

No.	Description
1	Liquid pipe connection
2	Suction pipe connection
3	Drain connection
4	Power and comm.wire conduit
5	Drain Knockout