



# SUBMITTAL DATA - CONTROLS

## MOSTAT61Q-1

### MINI-SPLIT HEAT PUMP

Job: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Schedule No.: \_\_\_\_\_  
 System Designation: \_\_\_\_\_

Engineer: \_\_\_\_\_  
 Architect: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 For: Reference Approval Review Construction

## Non-Programmable Controller

### FEATURES AND FUNCTIONS


- Simple, user friendly design
- Operation - On/Off
- Operation Mode - Auto / Cool / Dry / Heat / Fan
- Fan Speed - Auto / Low / Medium / High
- Large display for easy viewing
- °F or °C field selectable - default °F
- Backlit LCD display for easy visibility
- Set point is not displayed when unit is off

### SPECIFICATIONS

PERFORMANCE	
Input Voltage (V)	5Vdc
Communication Cabling	Factory 4-wire harness
Setpoint Range	62°F ~ 86°F
Operating Temperature Range	23°F ~ 110°F
Operating Humidity Range (RH)	40% ~ 90%



### DISPLAY

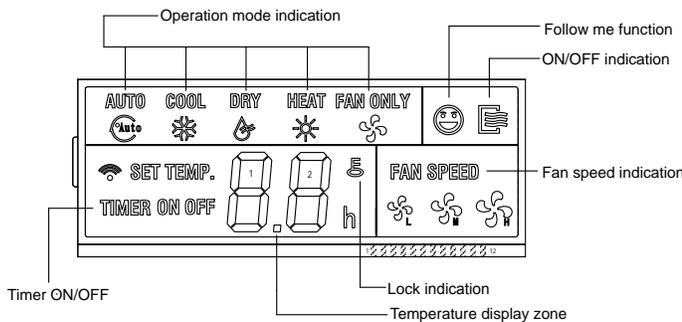

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.