


CUT SIZE: 6-3/4"W x 8-1/2" H

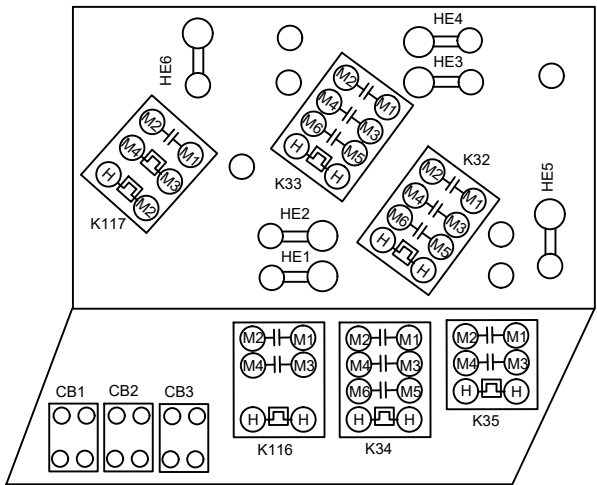


DESCRIPTION	
KEY	COMPONENT
CB1	CIRCUIT BREAKER-ELECT HEAT
CB2	CIRCUIT BREAKER-ELECT HEAT
CB3	CIRCUIT BREAKER-ELECT HEAT
HE1	ELEMENT-ELECTRIC HEAT 1
HE2	ELEMENT-ELECTRIC HEAT 2
HE3	ELEMENT-ELECTRIC HEAT 3
HE4	ELEMENT-ELECTRIC HEAT 4
HE5	ELEMENT-ELECTRIC HEAT 5
HE6	ELEMENT-ELECTRIC HEAT 6
K32,-1,2,3	RELAY-ELECTRIC HEAT
K33,-1,2	RELAY-ELECTRIC HEAT
K34,-1,2	RELAY-SEQUENCER,ELECTRIC HEAT

DESCRIPTION	
KEY	COMPONENT
K35,-1,2	RELAY-SEQUENCER,ELECTRIC HEAT
K116,-1	RELAY-SEQUENCER,ELECTRIC HEAT
K117,-1	RELAY-SEQUENCER,ELECTRIC HEAT
P2	PLUG-ELECTRIC HEAT
S15	SWITCH-LIMIT,PRIMARY,ELECT HEAT
S20	SWITCH-LIMIT,SECONDARY,ELECT HEAT

KW	AMPS
25KW	(3)50A

CIRCUIT BREAKERS

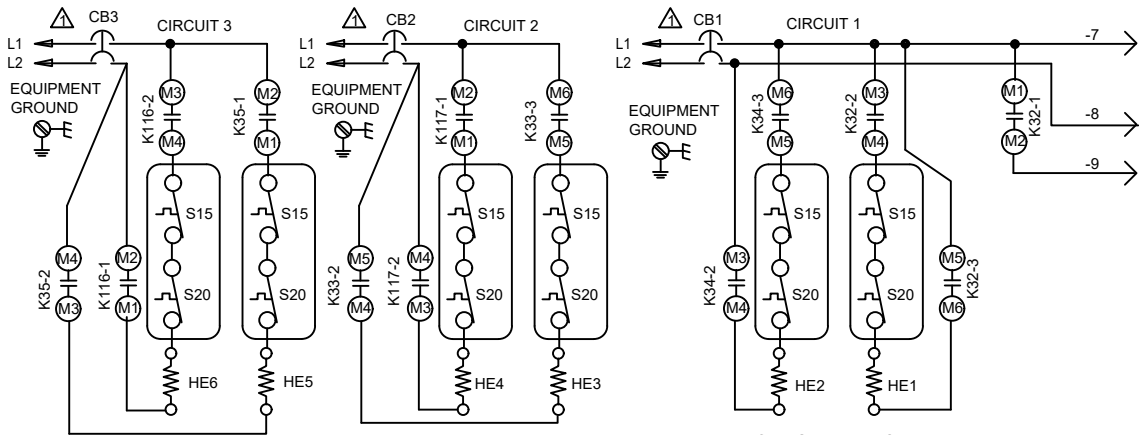

NOTE: USE COPPER CONDUCTORS ONLY
REFER TO UNIT NAMEPLATE FOR MINIMUM
CIRCUIT AMPACITY AND MAXIMUM
OVERCURRENT PROTECTION SIZE.

HEATING-ELECTRIC	
ECB47-25CB-P	
Supersedes	
03/24	Form No. 538458-01