

SUBMITTAL DATA - OUTDOOR UNIT

VPC038W4M-4P

Job:		Engineer:			
Location:		Architect:			
Schedule No.:		Location:			
System Designation:		Date:			
Notor Source Outdoor Unit		For Reference	Annroval	Review	Construction

Water Source Outdoor Unit

FEATURES

- · Heat Pump Models
- Minimal Noise for Maximal Comfort
- · Flexible Installation Options
- · Advanced Plate Heat Exchanger
- · Louver-less Installation
- · Renewable Energy Source

WARRANTY

- · Compressor 10-year limited warranty
- All other components 10-year limited warranty
 *See warranty for details

SPECIFICATIONS		
PERFORMANCE		
Cooling Capacity ¹ (Btu/h)	Nominal	38,200
3 : 1, ,	Rated ²	38,000
EER	Ducted	14.5
	Non-Ducted	15.0
IEER	Ducted	24.0
	Non-Ducted	28.0
Heating Capacity ¹ (Btu/h)		42,000
COP68	Ducted	5.10
	Non-Ducted	5.70
Operating Water Temperatures (°F)	Cooling	50-113
	Heating	50-113

ELECTRICAL DATA	
Power Supply (Volts/Phase/Hertz)	208-230/1/60
Minimum Circuit Ampacity (A)	20
Maximum Overcurrent Protection (A)	35
Compressor Output (kW x n)	2.82 x 1

GENERAL DATA			
Connection Ratio	50% to 130%		
Maximum Number of Indoor Units	6		
Refrigerant Type	R-410A		
Factory Refrigerant Charge (each unit)	2.4 lbs.		

LENNOX SAMSUNG


DIMENSIONS (Each Module)					
Unit	Height	31.5			
Dimensions (in)	Width	29.5			
	Depth	13			
Net Weight		161			
Main System Piping (in)					
Liquid Pipe Connection		3/8			
Gas Pipe Connection		5/8			

NOTES

- 1. Specification may be subject to change without prior notice.
- 2. * Nominal capacities are based on (Equivalent refrigerant piping: 25ft(7.5m), Level differences: 0ft(0m)
 - Cooling : Indoor temperature : 80°F(26.7°C) DB, 67°
 F(19.4°C) WB / Inlet water temperature : 85°F(29.4°C)
 - Heating: Indoor temperature: 70°F(21.1°C) DB, 60° F(15.6°C) WB / Inlet water temperature: 68°F(20°C)
- * Rated capacityes are based on (Equivalent refrigerant piping : 25ft(7.5m), Level differences : 0ft(0m)
 - a. Cooling : Indoor temperature : 80.6°F(27°C) DB, 66.2° F(19°C) WB / Inlet water temperature : 86°F(30°C)
 - Heating: Indoor temperature: 68°F(20°C) DB, 59° F(15°C) WB / Inlet water temperature: 68°F(20°C)



DIMENSIONAL DRAWINGS - MM (Inches)

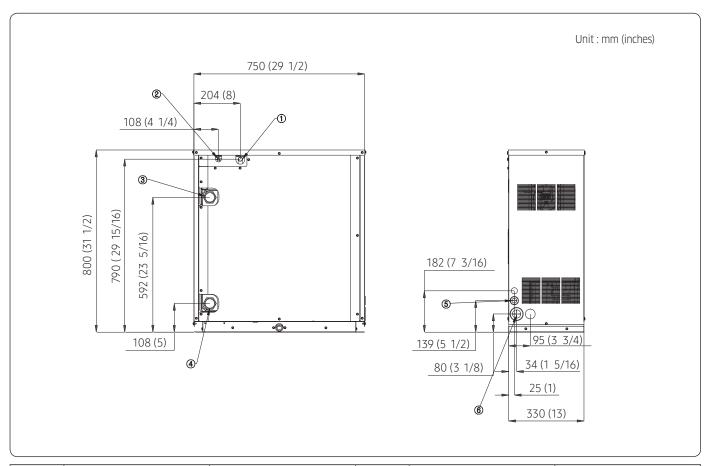

No.	Name	Description	No.	Name	Description
1	Gas ref. pipe	15.88 (5/8")	4	Water inlet pipe	NPT 1-1/4
2	Liquid ref. pipe	9.52 (3/8")	5	Communication wiring	-
3	Water outlet pipe	NPT 1-1/4	6	Power wiring	-