

SUBMITTAL DATA - WALL-MOUNTED

MWMC012S4-1P

MULTI-ZONE MINI-SPLIT HEAT PUMP

Engineer:
Architect:
Date:
For: Reference Approval Review Construction

FEATURES

Job:
Location:
Schedule No.:
System Designation:

- Pre Heat Function
- Multi-Refrigerant Outlet
- Auto Restart
 Three Speed Fan
- Flare Connections
- Refrigerant R-410A
- LED Readout Panel
- Wireless Remote Controller included

Product Warranty

All covered components - Twelve year limited warranty. Product registration required.

Product registration required.							
SPECIFICATIONS							
PERFORMANCE							
Cooling Capacity ¹ (Btu/h)		12,000					
Heating Capacity ¹ (Btu/h)		12,000					
Airflow (CFM)	High	335					
	Medium	230					
	Low	176					
External Static Pressure (in. w.g.)							
Sound Pressure (dBA)	High	36.0					
	Medium	33.5					
	Low	22.5					
ELECTRICAL DATA							
Power Supply (V/Hz/Φ)		208-230/60/1					
Power Supply (V/Hz/Φ) Rated load amps (RLA)		208-230/60/1 0.20					
Rated load amps (RLA)		0.20					
Rated load amps (RLA) Power Output (W)	Height	0.20					
Rated load amps (RLA) Power Output (W) DIMENSIONS	Height Width	0.20 20					
Rated load amps (RLA) Power Output (W) DIMENSIONS	•	0.20 20 11-3/4					
Rated load amps (RLA) Power Output (W) DIMENSIONS	Width	0.20 20 11-3/4 33-3/8					
Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in)	Width	0.20 20 11-3/4 33-3/8 9					
Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in)	Width Depth	0.20 20 11-3/4 33-3/8 9 1/4					
Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in) Gas Pipe Connection (in)	Width Depth	0.20 20 11-3/4 33-3/8 9 1/4 1/2					
Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in) Gas Pipe Connection (in) Condensate drain connection	Width Depth	0.20 20 11-3/4 33-3/8 9 1/4 1/2					



OPTIONAL ACCESSORIES	
Non-Programmable Controller (M0STAT61Q-1)	
Non-Programmable Controller (M0STAT120L-1)	Ť
Programmable Controller (M0STAT64Q-2)	

NOTES

1. Cooling and Heating capacity data is rated at the following conditions:

Cooling: 80°FDB / 67°FWB Indoor, 95°FDB Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor











SUBMITTAL DATA - WALL-MOUNTED

MWMC012S4-**1**P

MULTI-ZONE MINI-SPLIT HEAT PUMP


DIMENSIONAL DRAWINGS - INCHES (MM)



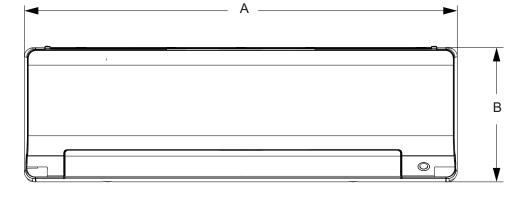

SIDE VIEW



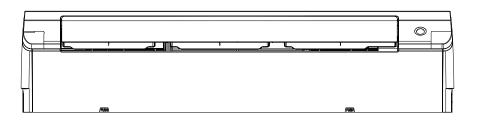

BOTTOM VIEW

Size	Α		В		С	
Size	in. mm	in.	mm	in.	mm	
MWMC009, 012	33-3/8	848	11-3/4	298	9	229
MWMC018	40	1016	12-1/2	318	9-1/2	241
MWMC024, 030	46-7/8	1191	14-5/8	371	11	279