

SUBMITTAL DATA - INDOOR UNIT

V36D018S6-5P

VRF Ductless 360 Cassette

Job:
Location:
Schedule No.:
System Designation:

Engineer:
Architect:
Location:
Date:

360 Cassette Indoor Unit

FEATURES

- 360 Air Flow
- Adjustable Fan Speed
- Built-in Condensate Lift Pump with Check Valve
- Washable Pleated Air Filter
- Built-in IR Receiver
- Refrigerant R-32
- Seven Capacity Sizes from 9,000 to 48,000 Btu/h

WARRANTY

- 10-year limited warranty.*See warranty for details.

SPECIFICATIONS

PERFORMANCE

Cooling Capacity ¹ (Btu/h)	18,000
Heating Capacity ¹ (Btu/h)	20,000
Airflow (CFM)	Low/Medium/High 494/530/565
External Static Pressure (in.w.g.)	-
Sound (dBA)	Low/Medium/High 29/31/33

ELECTRICAL DATA

Power Supply (Volts/Phase/Hertz)	208/230V-1Ph-60Hz
Cooling Power Input ² (W)	26
Cooling Rated Current (A)	0.18
Heating Power Input ² (W)	26
Heating Rated Current (A)	0.18
Fan Motor Output (W)	65 x 1

DIMENSIONS

Unit Dimensions (in)	Width	37.28
	Height	11.06
	Depth	37.28
Panel Dimensions (in)	Width	39.37
	Height	2.90
	Depth	39.37
Liquid Pipe Connection (in)		1/4
Gas Pipe Connection (in)		1/2
Net Weight (lb)		44.5
Shipping Weight (lb)		55.1
Panel Shipping Weight (lb)		13.67
Panel Net Weight (lb)		8.82

OPTIONAL ACCESSORIES

360 CST (Exposed) Black Panel, Wi-Fi	37P77
360 CST (Exposed) White Panel, Wi-Fi	37P75
360 CST Black Panel, Wi-Fi	37P74
360 CST White Panel, Wi-Fi	37P73
Motion Detector Sensor 360 CST	37Y86
VSTAT02P-1 Touch Screen Wired Controller	37P79
VSTAT04P-1 Individual Wired Controller	37Y74
VSTAT01P-1 Wireless Remote Controller	37Y73



NOTES

- Specification may be subject to change without prior notice.
- 1) Performances are based on the following test conditions.
 - Cooling : Indoor temperature : 80°F(26.7°C) DB, 67°F(19.4°C) WB, Outdoor temperature : 95°F(35°C) DB, 75°F(23.9°C) WB
 - Heating : Indoor temperature : 70°F(21.1°C) DB, 60°F(15.6°C) WB, Outdoor temperature : 47°F(8.3°C) DB, 43°F(6.1°C) WB
 - Equivalent refrigerant piping length 7.5m(24.6ft), Level differences : 0m(0ft)
- 2) Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.
- 3) These products contain R32 (GWP=675) which is fluorinated greenhouse gas.
- 4) Select wire size based on the value of MCA




NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

496226 (202412)

©2024 Lennox Industries Inc..

DIMENSIONAL DRAWINGS - MM (IN.)

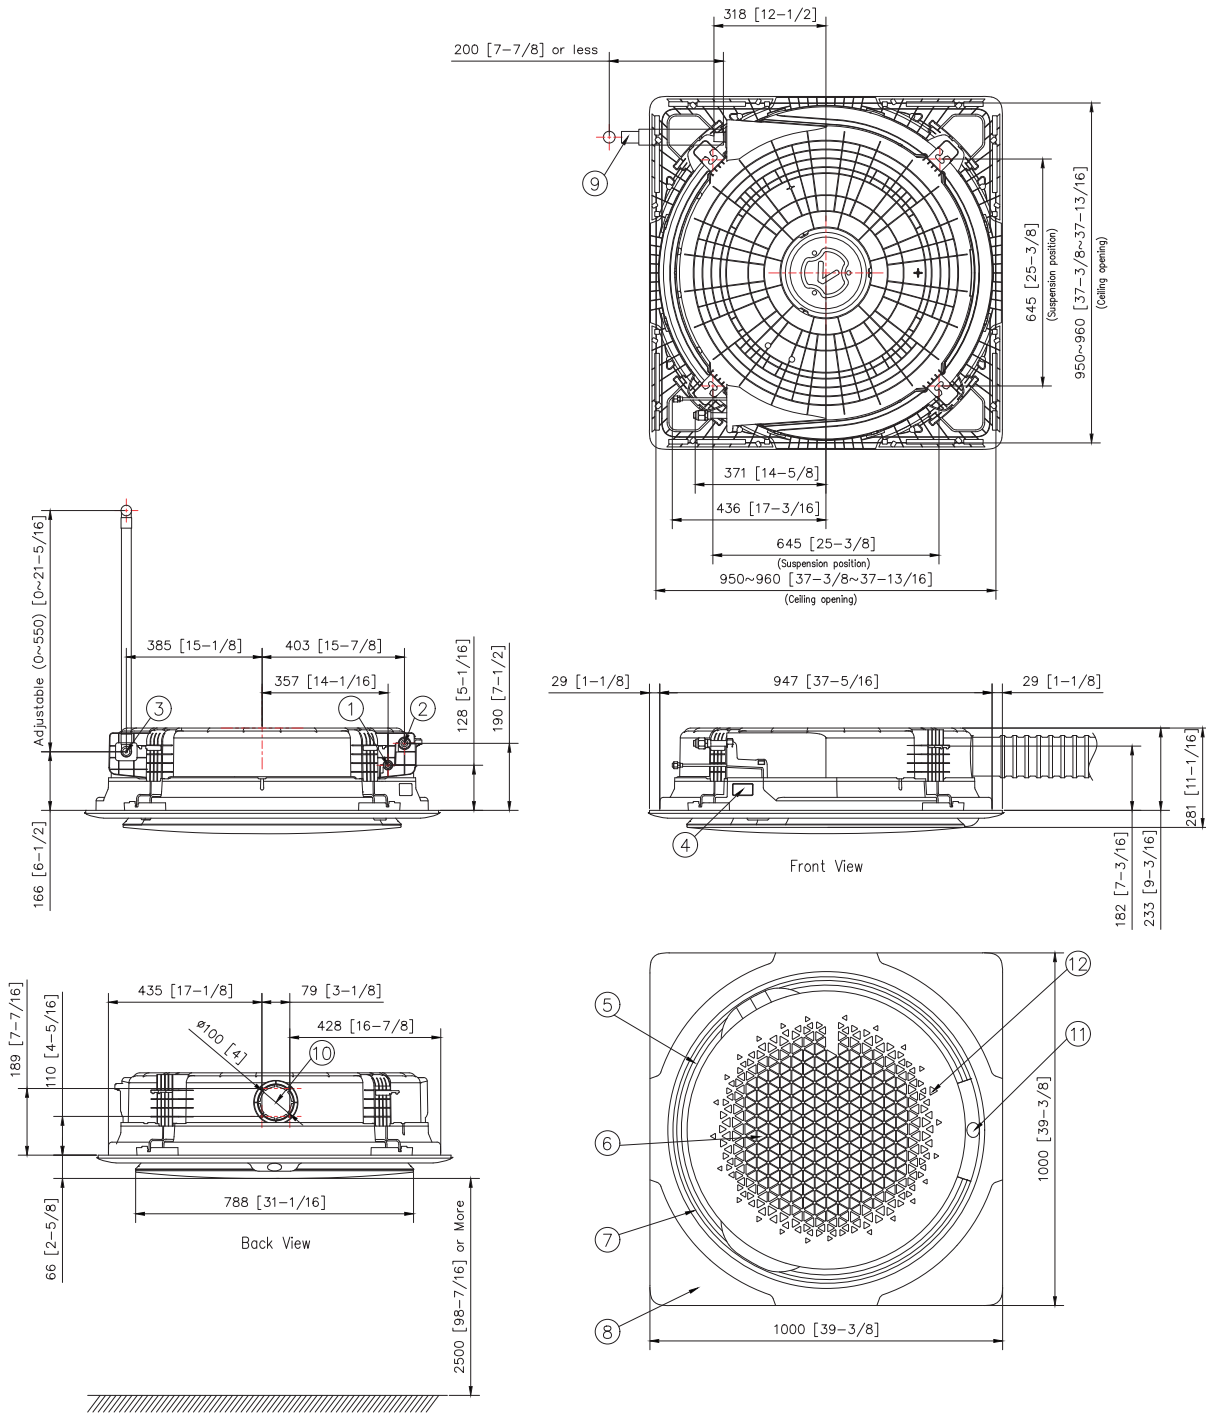

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.




Powered by
SAMSUNG

SUBMITTAL DATA - INDOOR UNIT

V36D018S6-5P

VRF Ductless 360 Cassette

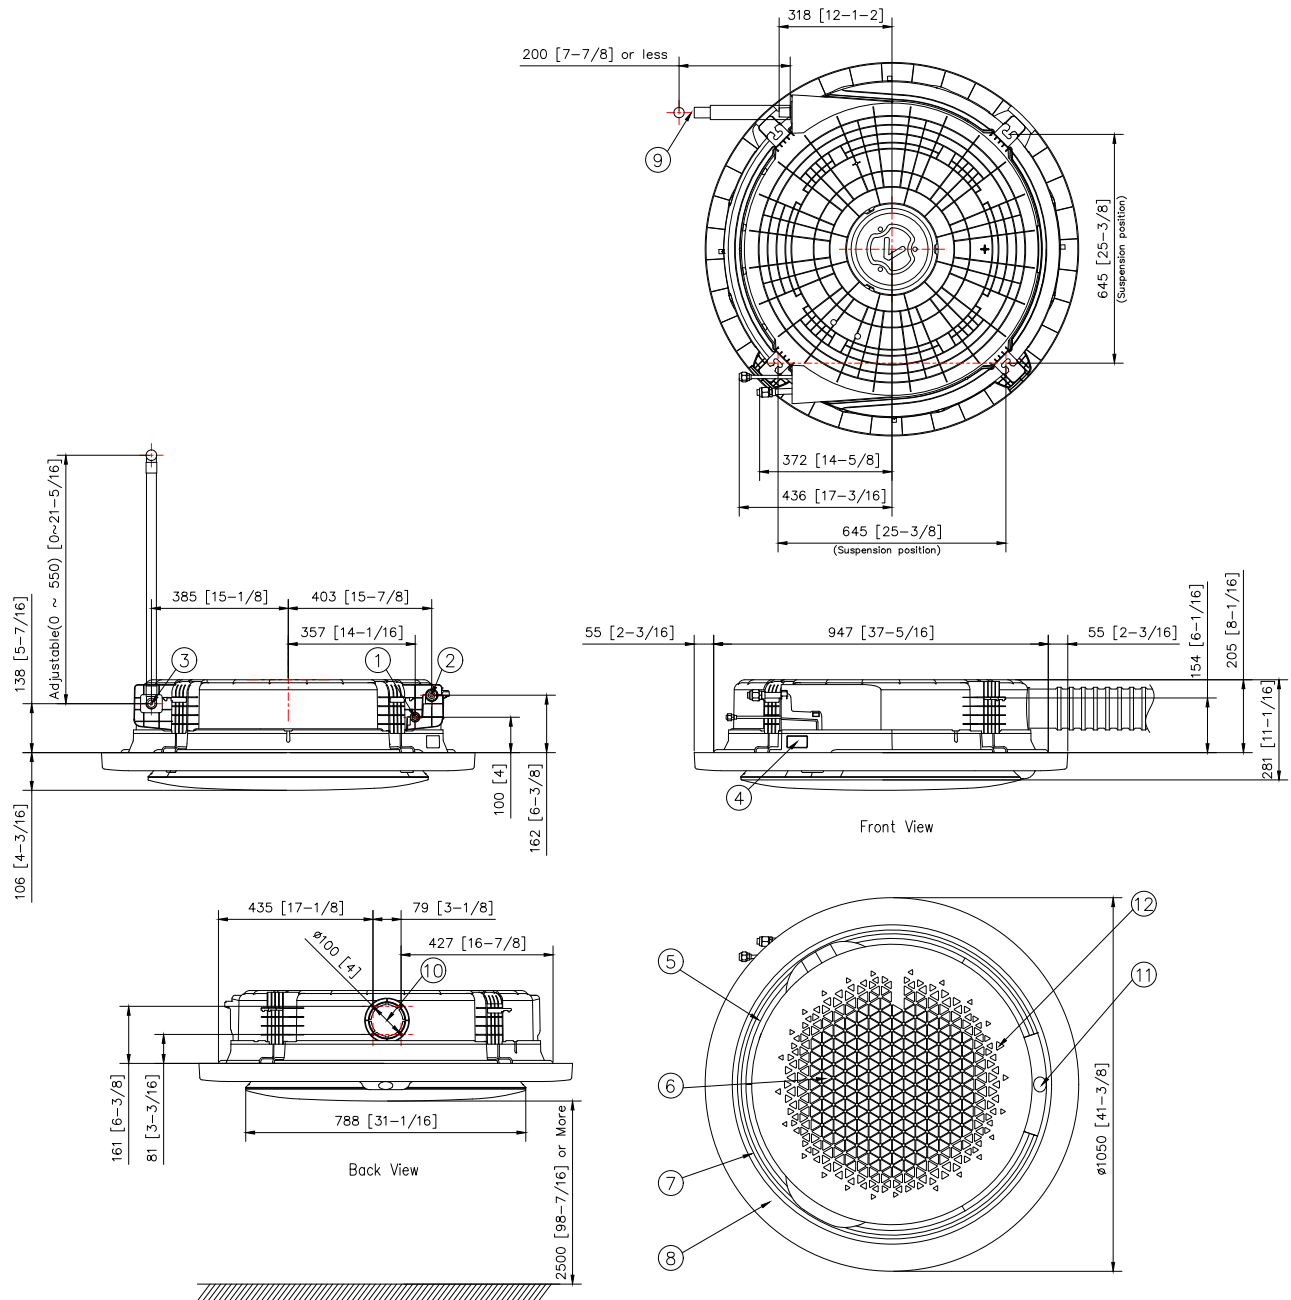

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

496226 (202412)

©2024 Lennox Industries Inc.