

L40**Residential Control System****Programmable Smart Wi-Fi Thermostat****RESIDENTIAL
PRODUCT SPECIFICATIONS (EHB)****2 Heat / 1 Cool
Universal**

The L40 is a Smart Wi-Fi, electronic 7-day, universal, programmable, touchscreen thermostat.

- LCD display with backlight shows the current and set temperature, and system status (operating mode and schedules)
- Touchscreen interaction
- Ergonomic design
- Smooth Setback Recovery starts system early to achieve setpoint at start of program period
- Compressor short-cycle protection (5 minutes)
- Real-time clock keeps time during power failures and automatically updates to daylight savings
- Maintenance reminders let user know when to service or replace filters, PureAir® metal insert, humidifier pads, ultraviolet lamps, ventilation and ventilation filter
- Up to four separate schedules are available plus Schedule IQ™
- One-Touch Away Mode - A quick and easy way to set the cooling and heating setpoints while away
- Permanent memory storage of settings
- Wallplate furnished

APPROVALS

- ENERGY STAR® certified
- Factory preset program settings conform to EPA ENERGY STAR® recommended setpoints

APPLICATIONS

- Fully programmable thermostat provides universal system compatibility, precise comfort control and easy programmability
- Provides temperature control for gas, electric and heat pumps for single-stage heating or cooling systems (including dual-fuel operation)





HOME AUTOMATION

- Amazon® Alexa-enabled
- Works with Google Assistant
- Works with Control4® and Building36® integration
- Works with Matter Smart Home Automation

WARRANTY

- Limited five years in residential applications

NOTE - Refer to Lennox® Basic Limited Warranty at www.Lennox.com for additional details.

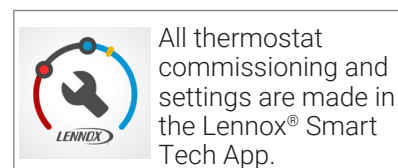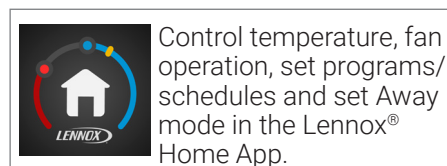**CONTENTS**


Commissioning - Initial Setup (Thermostat)	13
Dealer Service Center - Installer Settings (Thermostat)	14
Home Automation	3
Homeowner Settings	5
Mobile Apps (Homeowner/Installer)	2
Specifications	17

MOBILE APPS (HOMEOWNER/INSTALLER)

LENNOX HOME (Homeowner)



The free Lennox Home App is available for use on smartphones. Control cooling/heating temperatures, fan operation, set programs/schedules and set Away mode for multiple locations.

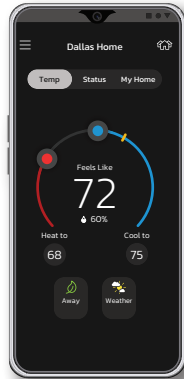

LENNOX PROS APP (Installer)



LennoxPROs mobile application has all the information HVAC Professionals and businesses need in one place.

- Product Catalog
- Residential/Commercial products
- Parts and Supplies
- Clearance Center
- Real-Time Product Availability
- Technical Tools
- AHRI Residential Match-up Tool
- OEM Repair Parts
- Technical Documents
- Sales Tools
- Marketing Brochures
- Commercial Quick Quote
- Warranty Tools
- Warranty Lookup
- Training Center
- My Learning

LENNOX SMART TECH (Installer)




Allows the installer to commission the system and remotely turn the system on and off during setup or service call from a smartphone.

Alerts and Notifications sent to Dealer to notify when servicing or maintenance is required.

Share advanced diagnostics with the Dealer to aid in servicing and troubleshooting.

Allows quick connection to the thermostat via Bluetooth for easier system configuration changes via a Smartphone.

- Equipment Configuration Profile (ECP):
 - Allows dealers to create unique equipment profiles specific to products sold at their dealership
 - Can be imported into the homeowner's smart thermostat reducing setup times

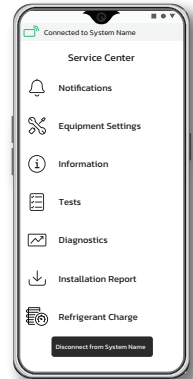

HOME AUTOMATION

Amazon® Alexa

The L40 Smart Thermostat is an Amazon® Alexa-enabled, smart-home-compatible thermostat.

Allows the homeowner to tell Alexa to control system mode and heating/cooling setpoints.

Works in conjunction with the Amazon Alexa app (click icon):



See User Guide for additional information about device setup and available voice commands.

Amazon's trademark is used under license from Amazon.com, Inc. or its affiliates.

Google Assistant

Control basic functions of the L40 thermostat using Google Assistant.

Download the Google Home app from Google Play or the App Store™ on a compatible phone or tablet, then follow the on-screen steps to finish setup.

Once you have added the thermostat to your Google Home app install the Google Assistant app (Android and iOS) to enable voice control.

NOTE - The Google Assistant app may already be installed on the Android device.

For additional information please visit the [Lennox® Support Website for Google Assistant Integration](#).



Google and the Google logo are registered trademarks of Google LLC, used with permission.

Control4® Smart Home | Operating System

Control4 is a leading control and automation platform which works with thousands of smart devices integrating audio, video, lighting, security, intercom, and climate control into a seamless customer experience.

Control4 gives the customer an easy-to-use interface to control the Lennox® L40 thermostat.

Settings include:

- Display all systems in the home and select a system
- Display all zones in the system and select a zone
- Turn system or zones on or off
- Change manual modes (heat, cool, off)
- Change heating/cooling setpoints for each zone/system
- Change fan mode (on, auto, circulate)

For additional information please visit the [Support Website for Control4 Integration](#).



NOTE - For integration with Lennox® L40 Thermostats, the customer must contact their [Control4](#) dealer directly to download and install the necessary driver for their operating system.

Control4® is a registered trademark of Control4 Corporation. All rights reserved.




Building36® Practical Home Automation

Building36® is a leading control and automation company that delivers next-generation smart home solutions which work with thousands of smart devices, integrating control for HVAC, water, video, lighting/appliance and security into one location.

Building36® gives the customer an easy-to-use interface via the Building36 Dashboard or the Building36 Home Mobile App to control the Lennox® L40 thermostat.

Settings include:

- Display all systems in the home and select a system
- Display all zones in the system and select a zone
- Turn system or zones on or off
- Change manual modes (heat, cool, off)
- Change heating/cooling setpoints for each zone/system
- Change fan mode (on, auto, circulate)

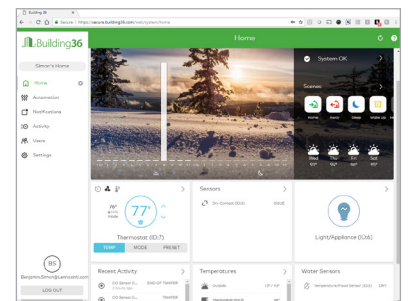

For additional information please visit <https://building36.com>

BUILDING36® is a registered service mark of Building36. All rights reserved.

HOME AUTOMATION

Matter Smart Home Automation


- Matter is an open standard for smart home technology that lets your device work with any Matter-certified ecosystem using a single protocol
- Matter comes from the Connectivity Standards Alliance, an organization of hundreds of companies creating products for the smart home
- Works with thousands of smart devices
- Enabled with Matter, the M40 thermostat will work with other smart devices built on this industry-unifying technology, including voice-enabled assistants, straight out of the box
- Smart devices enabled with Matter work together seamlessly
 - Simplicity - Simplifying connected experiences
 - Interoperability - Providing greater compatibility and easier connections
 - Reliability - Enabling reliable connections
 - Security - Maintaining secure connections



For additional information please visit <https://matter-smarthome.de/en/>

Matter is a registered service mark of Matter. All rights reserved.

HOMEOWNER SETTINGS

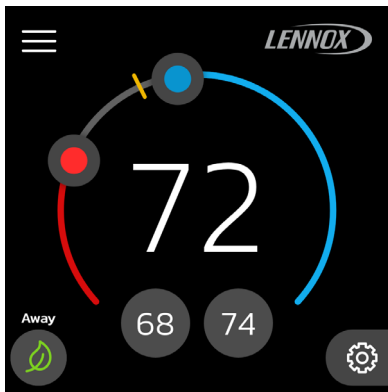
HOME SCREEN	Notes
 The Home Screen displays the current temperature (72°F) in the center. A circular band around the temperature shows heating (red) and cooling (blue) setpoints (68°F and 74°F). Icons for Menu, Away, and Configuration are at the bottom. The Lennox logo is in the top right.	 All thermostat settings can also be made in the Lennox® Home App.  If screen is dark, touch screen to turn on the backlight.
Temperature Settings	
Large display of current inside temperature (°F or °C)	 Touching the heat or cool setpoint indicators on the round temperature band, or touching the heating or cooling buttons displays the heat or cool menu screens (see page 7).  Both heating and cooling setpoint indicators on the round temperature band and the heating or cooling setpoint buttons are displayed if System is set to Heat/Cool.  Indicator mark on the round band marks the temperature setting.  Various animated icons appear above the current temperature depending on system operation..
Heating and Cooling Setpoint Indicators on the round temperature band	
Current cooling setpoint temperature Button (right-side)	
Current heating setpoint temperature Button (left-side)	
 Menu Button	 Touch to display Menu screen (see page 8).
 Away Button	 Touch to display Away Mode screen (see page 7).
 Configuration Button	 Animated icons also appear here for configuration, maintenance notification, Wi-fi status, peak monitoring, or upcoming functions.
 Notifications Button	 Only displayed if there are active notifications  Touch to display any active notifications.
Mode Icons (Split Systems)	
 Heat / Cool	 Touch the Menu button  on the home screen, touch Mode to display the Mode Screen.  Animated versions of these icons are also displayed on the Home screen above the actual temperature to indicate current system operation. The Off icon is displayed below the actual temperature if the system is not running. Touch the Off icon to display the Mode Screen directly.
 Heat Only	
 Cool Only	
 Emergency Heat (emergency heat operating as main heating source)	
 Off	

HOMEOWNER SETTINGS

HOME SCREEN (Continued)	Notes
Fan Status Icons (Split Systems)  Fan On  Fan Auto  Fan Circulate	 Touch the Menu button  on the home screen, touch Fan to display the Fan Screen.
Miscellaneous Icons  System Tests  Schedule Hold  Service Urgent  Peak Monitoring	 System Tests is displayed when system is configured for different equipment.  Schedule Hold is displayed when a current schedule override is in effect.  Service Urgent is displayed if there is a critical issue with the system.  Peak Monitoring allows the utility company to control the energy savings time period. You can select cancel to exit this mode. By canceling homeowner is opting out of the current active energy savings events. (Also see ???)  Peak Monitoring Registration is set up in the Lennox® Home App.

HOMEOWNER SETTINGS

HEAT MENU SCREEN

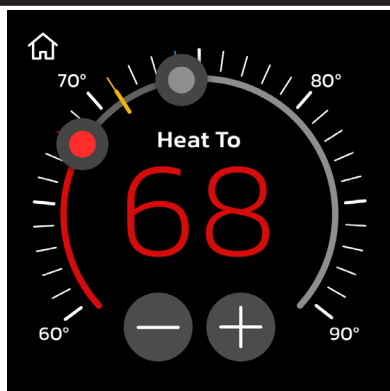

Heating setpoint display

Heating Setpoint Indicator on the round temperature band

Plus (+) and Minus (-) buttons

Home button (return to Home Screen)

Notes

- On the Home Screen, touching the heat setpoint indicators on the round temperature band, or touching the Plus (+) and Minus (-) buttons displays the heat menu screen.
- Touch and move the red heat setpoint indicator on the round temperature band, or touch the **plus** or **minus** buttons to change the heating setpoint in one degree increments. Adjustable 60 to 87°F.
- A wider setpoint range (40 to 99°F) can be set in the Lennox® Home App.
- During a scheduled time period, touching either the setpoint indicator on the temperature band or the heat-to button will initiate a schedule hold (see page 9).

COOL MENU SCREEN



Cooling setpoint display

Cooling Setpoint Indicator on the round temperature band


Plus (+) and Minus (-) buttons

Home button (return to Home Screen)

Notes

- On the Home Screen, touching the cool setpoint indicators on the round temperature band, or touching the Plus (+) and Minus (-) buttons displays the cool menu screen.
- Touch and move the blue cool setpoint indicator on the round temperature band, or touch the **plus** or **minus** buttons to change the cooling setpoint in one degree increments. Adjustable 63 to 90°F.
- A wider setpoint range (40 to 99°F) can be set in the Lennox® Home App.
- During a scheduled time period, touching either the setpoint indicator on the temperature band or the cool-to button will initiate a schedule hold (see page 9).

AWAY SCREEN

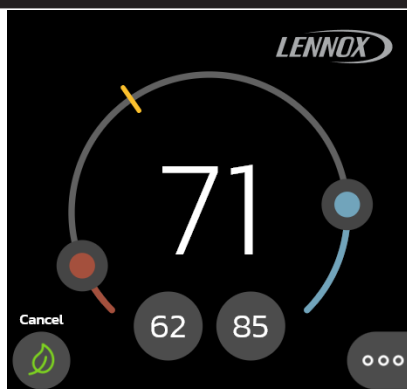

Set heating or cooling setpoints during unoccupied periods

Heating and Cooling Setpoint Indicators on the round temperature band

Current away cooling setpoint temperature Button (right)


Current away heating setpoint temperature Button (left)

Cancel Away Mode Button

Notes

- Touch the Away button  to access the Away setpoint screen.
- Touch the heat or cool setpoint indicators on the round temperature band, or touch the heating or cooling buttons to change the away setpoints.
- Touch Cancel to end away mode and return to current system operation.
- Away setpoints are adjustable in the Lennox® Home App:
40 to 87°F Heating
60 to 90°F Cooling


HOMEOWNER SETTINGS

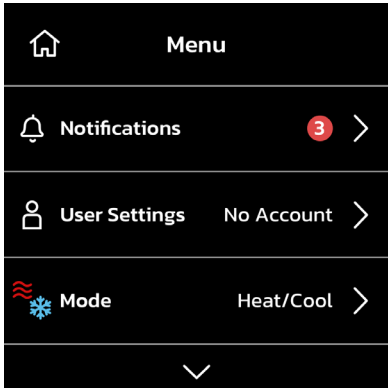MENU SCREEN	Notes
 Notifications - Displays system operating and service reminder messages (see page 8) User Settings (see page 9) Mode (see page 9) Schedule (see page 9) Fan (see page 10) Wi-Fi (see page 10) Thermostat Settings (see page 10) Advanced Settings (see page 14)	Touch the Menu button  on the home screen to display the Menu screen. Touch each item to display the selected screen. Scroll down to see all menu items. Touch the Home  button to return to the Home Screen.
NOTIFICATIONS SCREEN	Notes
 Critical (Red Alert) - Displays information that service is required for a major system component as soon as possible Warnings (Orange Alert) - Displays information about system operation Reminders (Yellow Alert) - Displays required maintenance information (filter replacement, humidifier pad replacement, UV light replacement) Info (Blue Alert) - Displays information about installer access, Wi-Fi status, new devices found, software updates and additional useful information and tips to operate the system efficiently	Number of notifications  will be displayed over the Menu Button on the Home Screen. Touch the Menu button to go to Notifications. Touch the > to display the complete message for each notification. Alerts homeowner of critical and required service or maintenance issues. Notification settings (Filter replacement time, etc.) are set in the Lennox® Home App.

HOMEOWNER SETTINGS

USER SETTINGS SCREEN

Notes

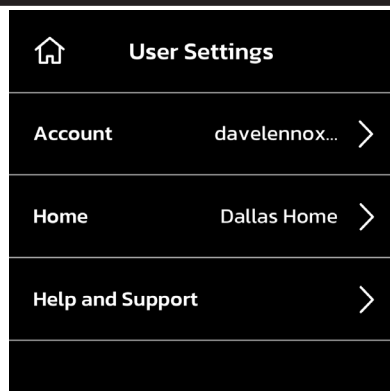

-  If no account is set up touch > touch the **Configure Thermostat** button to begin setting up account.
-  If an account is set up the homeowner's e-mail address will be displayed.
-  **Home** displays the current home name and address that the thermostat is associated with.
-  **Move Out** signs out of the current account and removes the thermostat from the current account.
-  To view more account information or to change the password use the Lennox® Home App.

Account

Configure Thermostat Button


Move Out (Yes/No)

Home

Help and Support

MODE SCREEN (Split Systems)

Notes

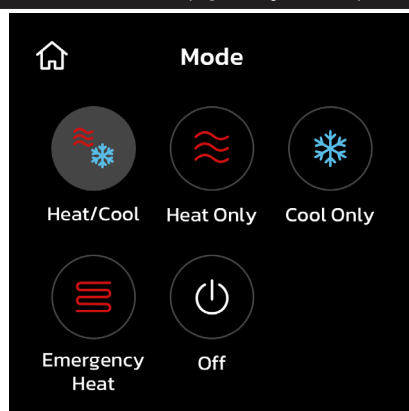

-  Touch **Mode** on Menu screen to access screen.

Heat/Cool Button

Heat Only Button

Cool Only Button


Emergency Heat Button (heat pump systems only)

Off Button

-  Touch each button to set the mode of operation.
-  Touch the **Home** button  to return to the Home Screen.




SCHEDULE SCREEN

Notes

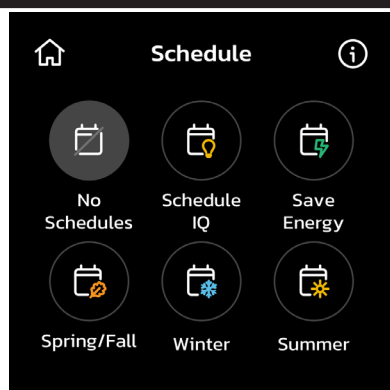

-  Touch to start a schedule.
-  Schedules are modified in the Lennox® Home App.


HOMEOWNER SETTINGS

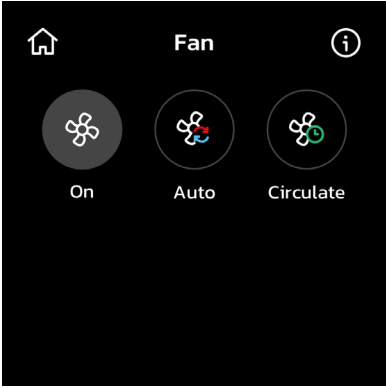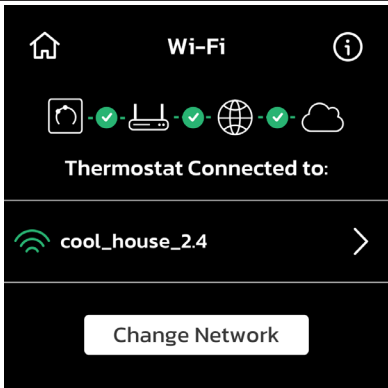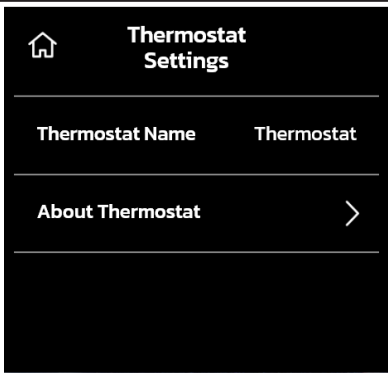FAN SCREEN (Split Systems)	Setting	Default	Notes
			Touch the Menu button  on the home screen to display menu. Touch the Fan menu to display the Fan screen. Touch the Home button  to return to the Home Screen.
	On Button		Touch each button to set the fan operation.
	Auto Button		
Circulate Button	9 to 27 minutes	21 minutes	Fan runtime adjustment is selected in the Lennox® Home App.
WI-FI SCREEN			Notes
			A graphical representation of the home network showing the connection status from the Thermostat to the Internet to the Lennox server. Touch the > to see current network SSID, IPAddress, Security level and RSSI. Touch the i button for additional information about a particular network (name, SSID, security, RSSI, etc.) available on the Lennox® Home App. Touch Change Network displays thermostat connectivity through the Lennox® Home App. A red "X" means that there is an issue with a connection point that must be resolved.
	Current Active Network Button		
	Change Network		
THERMOSTAT SETTINGS SCREEN			Notes
			System Name is set in the Lennox® Home App. Thermostat Name is set in the Lennox® Home App.
	System Name (not shown)		
	Thermostat Name		
	About Thermostat (see page 11)		

HOMEOWNER SETTINGS

ABOUT THERMOSTAT SCREEN			Notes	
< About Thermostat Thermostat Information > Software Update > Software Revision > Thermostat Information (see page 11) Software Update (see page 11) Software Revision (see page 12)			---	
THERMOSTAT INFORMATION SCREEN				
< Thermostat Information Model Number XXXXXXXX Serial Number XXXXXXXX Hardware Revision XX.XX.XXX MAC Address XX:XX:XX:XX:XX:XX Model Number Serial Number Hardware Revision MAC Address				---
SOFTWARE UPDATE SCREEN				
< Software Update Automatic Updates On > Check for Updates Now Automatic Updates On/Off On Check for Updates Now button			? Click the Check for Updates Now button to manually download and install any available software updates.	

COMMISSIONING - INITIAL SETUP (THERMOSTAT)

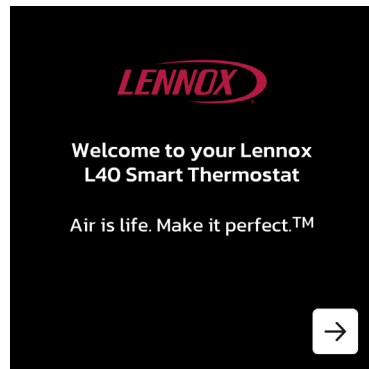

After power is applied to the thermostat for the first time it displays the Lennox® "splash screen".

The Installer is then presented with the several Setup Screens to configure the system prior to operation.

NOTE - Full thermostat and system configuration is set in the **Lennox® Smart Tech Thermostat App (recommended)**. See page 2.

MENU	SETTING (default is BOLD)		Notes:	
Language	English		---	
	Español			
	Français			
Setup Route	Smart Tech App (Recommended)		All information is added using the app on a mobile device.	
	L40 Thermostat		Partial information is added on the thermostat.	
Dealer Information	Dealer ID Letter		Scroll to select letter.	
	Dealer ID Number		Use keypad to input number.	
Date and Time	Date		Scroll to set date and time. NOTE - Date and Time is automatically set when connected to the Internet.	
	Time			
	Time Zone	Atlantic		
		Eastern		
		Central		
		Mountain		
		Pacific		
		Alaska		
		Hawaii		
		Samoa		
		Chamorro (Guam)		
	Daylight Savings	On or Off		
Temperature	Temperature Unit	°F or °C	---	
Indoor Unit	Not Installed		---	
	1 Stage Electric No Heat			
	1 Stage Electric			
	1 Stage Gas			
Outdoor Unit	Not Installed		---	
	1 Stage AC Unit			
	1 Stage HP Unit			
	Outdoor Unit Capacity	18 to 60 kBtu (36 kBtu)		Adjustable 18 to 60 kBtu
	Balance Points	Disabled or Enabled		Heat Pump
Reminder	Replace Filter 1	3, 6, 12, 24 months, disabled	---	
	Replace Filter 2			
	Maintenance Reminder			

DEALER SERVICE CENTER - INSTALLER SETTINGS (THERMOSTAT)

**NOTE - INSTALLER SETTINGS SHOWN ARE ON THE THERMOSTAT ONLY!
ADDITIONAL SETTINGS ARE AVAILABLE ON THE LENNOX® SMART TECH APP. SEE page 2.**

 Advanced Settings View Support Service Control Center Restart >	Provides access to the installer for viewing and performing various functions. • Connect to Mobile App • Equipment Settings • Notifications • Installation Report • Information • Exit Dealer Service Center	 The Service Center is accessed from the Home Screen under the Menu Button > Advanced Settings > View Support Service Control Center.
--	--	---

CONNECT TO MOBILE APP

Discover	Start Button	 Connects to the strongest channel and broadcasts a Thermostat ID for connecting to the Lennox® Smart Tech Thermostat App. See page 2.
	Stop Broadcasting Button Yes/No	 Stops broadcasting.

EQUIPMENT SETTINGS

THERMOSTAT	SETTING (default is BOLD)	Notes:
About	Product Type	 Equipment specifications.
	Language Support	
	Equipment Type Name	
	Control Software Revision	
	Control Model Number	
	Control Serial Number	
	Control Hardware Revision	
	Protocol Revision Number	
	Device Product Level	
	24VAC Average Power Consumption	
	24VAC Peak Power Consumption	
	Compatible Devices List	
	Application Code memory Size	
	Microcontroller Part Number	
	MAC Address	

DEALER SERVICE CENTER - INSTALLER SETTINGS (THERMOSTAT)

NOTE - INSTALLER SETTINGS SHOWN ARE ON THE THERMOSTAT ONLY!
ADDITIONAL SETTINGS ARE AVAILABLE ON THE LENNOX® SMART TECH APP. SEE page 2.

EQUIPMENT SETTINGS (Continued)

THERMOSTAT	SETTING (default is BOLD)		Notes:
Settings	Temp Reading Calibration	-5 to 5°F (0°F)	---
	Auto-Changeover - Temp Deadband	3 to 9°F (3°F)	
	Max Heat Setpoint	60 to 90°F (90°F)	
	Min Cool Setpoint	60 to 90°F (60°F)	
	Min Gas Heating Off Time	1.5 to 10 min. (1.5 min.)	
	1st Stage Differential	0.5 to 3°F (1.0°F)	
	2nd Stage Differential	0.5 to 8°F (1.0°F)	
	Smooth Setback Recovery	Enabled /Disabled	
	Balance Point Control	Enabled/ Disabled	
	Staged Delay Timers	Enabled/ Disabled	
	Outdoor Temperature	-10 to 10°F (0°F)	
	Aux Heating Activation	0 to 10°F (2.5°F)	
	Screen Saver	Off/ Power Save /Dim	
	Wide Setpoint	Off	
	Reset Button	Resets the thermostat	


NON-COMMUNICATING EQUIPMENT

Indoor	1 Stage Electric Heat	About	Model Number	---	
			Serial Number		
	1 Stage Electric No Heat	About	Model Number		Serial Number
			Serial Number		
	1 Stage Gas	About	Model Number		Serial Number
			Serial Number		
Outdoor	1 Stage AC Unit	About	Model Number	---	
			Serial Number		
		Outdoor Unit Capacity	18 to 60 kBtu (36 kBtu)		
		O/B Terminal	O (Cooling) or B (Heating)		
		Compressor Short Cycle Delay	60 to 300 sec (300 sec)		
	1 Stage Heat Pump	About	Model Number		---
			Serial Number		
		Balance Point Control	Disabled or Enabled		
		Outdoor Unit Capacity	18 to 60 kBtu (36 kBtu)		
		O/B Terminal	O (Cooling) or B (Heating)		
		Compressor Short Cycle Delay	60 to 300 sec (300 sec)		
		Add/Remove Equipment	Indoor		
Outdoor					
Reset	Restart Thermostat		Restarts Thermostat.		
	Reconfigure System		Resets existing outdoor/indoor units and settings.		
	Factory Reset		Reset to factory default settings.		

DEALER SERVICE CENTER - INSTALLER SETTINGS (THERMOSTAT)

**NOTE - INSTALLER SETTINGS SHOWN ARE ON THE THERMOSTAT ONLY!
ADDITIONAL SETTINGS ARE AVAILABLE ON THE LENNOX® SMART TECH APP. SEE page 2.**

NOTIFICATIONS




Provides information for active and previous (cleared) notifications. When selecting either a cleared or active notification a brief description and alert code will be displayed.

Notifications are color-coded to display - Urgent (red), Service Soon (orange) and maintenance (yellow)

To expand a notification for more details of the alert code, touch the arrow to expand the description.

Touch the **Cleared button** to move the notification to the cleared area.

INSTALLATION REPORT



Displays Installer and Customer information along with various parameters and settings for the system, outdoor equipment and indoor equipment at the time of installation.

- Installation report is based on various settings that were configured in the Equipment screens previously.
- Only certain parameters are displayed depending on the type of system installed (air conditioner, heat pump, dual-fuel).
- Touch the different selections to view the individual information screens.

Update Report Button

- Installer can generate a PDF file of the report to email to a homeowner. Reports are available at www.LennoxPros.com.

INFORMATION

Information Screen

Displays Dealer Information and General Settings from the Initial Setup Screen.

- See page 13.

EXIT DEALER SERVICE CENTER

Yes/**No**

- Returns to the Home Screen.

SPECIFICATIONS

NOTE - For use with residential equipment only.

Order No. - 27V51

Temperature Setting Range

- Heating - 60 to 87°F
- Cooling - 63 to 90°F
- Wider setting (configured on the Lennox® Home App):
 - Heating - 40 to 99°F
 - Cooling - 60 to 99°F

Power Supply

- 24VAC (18 to 30VAC maximum), 50/60Hz

Clock Accuracy

- ± 10 minutes per year

Terminals

Spring-loaded or screw type terminals for easy connections.

¹ Heat / 1 cool single-stage

- R - 24VAC power
- Y - 1st Stage Heating or Cooling
- W - 1st Stage Heating (AC or Emergency Heat) or 2nd Stage Heating (Heat Pump)
- G - Fan
- O/B - Reversing Valve (Cooling/Heating)
- C - Common 24VAC

¹ Configured in advance settings > terminal settings.

Dimensions

- Thermostat (H x W x D) - 3-3/4 x 3-3/4 x 7/8 in. (95 x 95 x 21 mm)
- Wallplate (H x W x D) - 4-7/16 x 4-7/16 x 1/4 in. (113 x 113 x 6 mm)

Backup

- Non-volatile memory maintains all programming in the event of a power outage

REVISIONS

Sections	Description of Change
Hoem Automation	Added Matter Smart Home Automation.



Visit us at www.Lennox.com
For the latest technical information, www.LennoxPros.com
Contact us at 1-800-4-LENNOX