

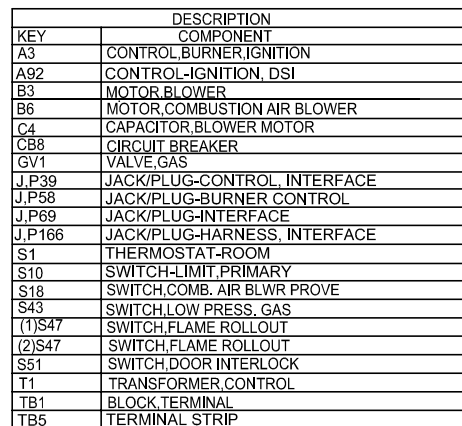


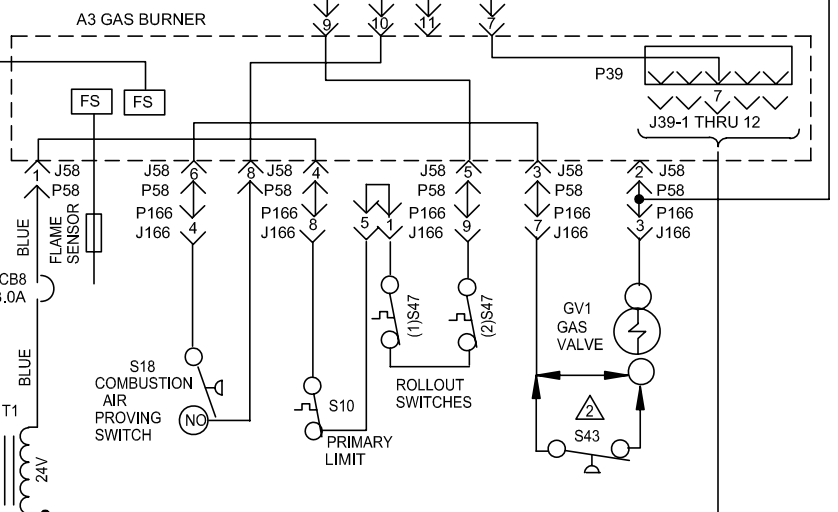

BLOWER SPEED CHART (LEADED MOTORS)				
UNIT	FACTORY CONNECTED SPEED TAP			MOTOR SPEEDS AVAILABLE
	COOL	HEAT	CONT	
Q2/3-75	BLACK	YELLOW	RED	4
Q3/4-100	BLACK	YELLOW	RED	3
Q4/5-100	BLACK	YELLOW	RED	3
Q4/5-120	BLACK	YELLOW	RED	3
Q4/5-140	BLACK	YELLOW	RED	3
BLOWER SPEED SELECTION				
HI ← LO				
SPEED TAP	(BLACK) (HI)	(YELLOW) (MED.)	(RED) (LO)	3
	(BLACK) (HI)	(BROWN) (MED-HI)	(YELLOW) (MED-LO)	(RED) (LO)
				4

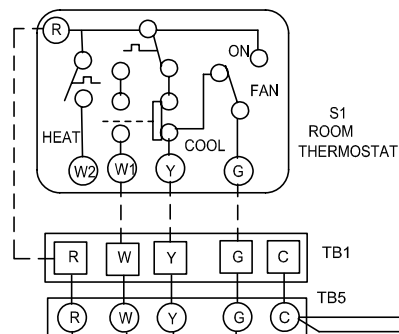

_____ LINE VOLTAGE FIELD INSTALLED
 - - - - - CLASS II VOLTAGE FIELD WIRING

NOTE-
IF ANY WIRE IN THIS APPLIANCE IS REPLACED, IT
MUST BE REPLACED WITH WIRE OF LIKE SIZE,
RATING AND INSULATION THICKNESS.

⚠ IMPORTANT-
TO PREVENT MOTOR BURNOUT,
NEVER CONNECT MORE THAN
ONE MOTOR LEAD TO ANY
ONE CONNECTION. TAPE ALL
UNUSED MOTOR LEADS
SEPARATELY.

2 FOR PROPANE/LP ONLY

LENNOX® Industries Inc. HEATING UNITS-GAS

UNITS CONVERTED TO CONTROL KIT 40W53

0208

New Form No.

537050-01

