

Job: _____
 Location: _____
 Schedule No.: _____
 System Designation: _____

Engineer: _____
 Architect: _____
 Location: _____
 Date: _____

Heat Pump Outdoor Unit

For: Reference Approval Review Construction

WARRANTY

- Compressor - 10-year limited warranty
 - All other components - 10-year limited warranty
- *See warranty for details

SPECIFICATIONS

PERFORMANCE

Cooling Capacity ¹ (Btu/h)	Nominal	18,200
	Rated ²	18,200
EER2	Ducted VRF IDU	11.7
	Ductless VRF IDU	12.5
SEER2	Ducted VRF IDU	17.00
	Ductless VRF IDU	17.50
Heating Capacity ¹ (Btu/h)		20,000
HSPF IV	Ducted VRF IDU	9.0
	Ductless VRF IDU	10.0
COP2 at 5°F (W/W)	Ducted VRF IDU	1.85
	Ductless VRF IDU	1.80
Operating Range (°F)	Heating	-22°F to 86°F
	Cooling	5°F to 125°F

ELECTRICAL DATA

Power Supply (Volts/Phase/Hertz)	208-230/1/60
Fan Motor Type	DC
Fan Motor Output (W)	80
Fan Quantity	1
MCA	15
MOCP	25

GENERAL DATA

Connection Ratio	65-130%
Maximum Number of Indoor Units	3
Sound Pressure Level (dBA)	55
Refrigerant Type	R-454B
Factory Refrigerant Charge (each unit)	58.2 oz.

NOTES

1. Cooling and Heating capacity data is rated at the following conditions:
 Cooling: 80°FDB / 67°FWB Indoor, 95°FDB Outdoor
 Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor
2. Complies with AHRI 210/240 testing standards
3. Operating Voltage Range 191V to 247V



DIMENSIONS

Unit	Height	28
Dimensions (in)	Width	39-1/8
	Depth	16-3/4

Main System Piping (in)


Liquid Pipe Connection	3/8
Gas Pipe Connection	5/8
Unit Net Weight (lb)	121




NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

DIMENSIONAL DRAWINGS - INCHES (MM)

1.5/2.0Ton Front view dimensions (unit: in)

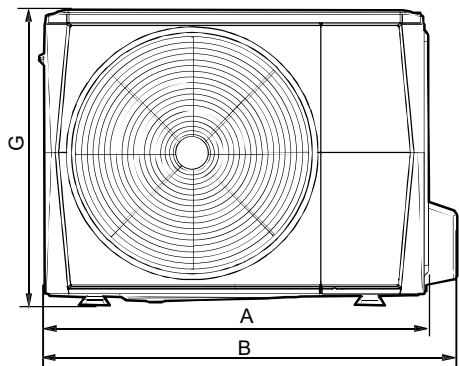

1.5/2.0Ton Top view dimensions (unit: in)

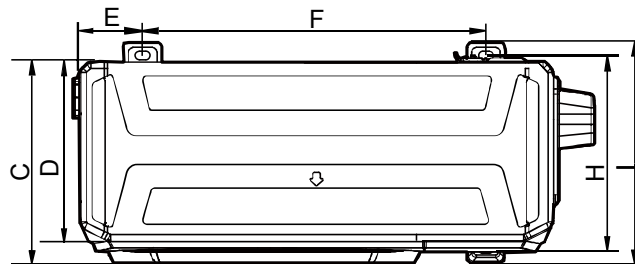

Model (Ton)	A	B	C	D	E	F	G	H	I
1.5/2.0	36-7/16	39-1/8	15-3/8	13-7/16	4-3/4	26-1/8	28	14-3/4	16-3/4