

Job:
Location:
Schedule No.:
System Designation:

Engineer:
Architect:
Location:
Date:

For: Reference Approval Review Construction

High-Static Concealed Ducted Indoor Unit

FEATURES

- Built-in condensate pump
- Smart pressure control system
- Convenient installation
- Refrigerant R-410A

WARRANTY

- 10-year limited warranty.*See warranty for details.

SPECIFICATIONS

PERFORMANCE

Cooling Capacity ¹ (Btu/h)	76,800
Heating Capacity ¹ (Btu/h)	85,200
Airflow (CFM) Low/Medium/High	2048/1836/1659
External Static Pressure (in. w.g.)	0.20~0.98
Sound (dBA) Low/Medium/High	45/43/41

ELECTRICAL DATA

Power Supply (Volts/Hertz/Phase)	208-230/60/1
Minimum Circuit Ampacity (MCA) (A)	4.80
Maximum Overcurrent Protection (MOP) (A)	15
Cooling Power Input ² (W)	530
Cooling Rated Current (A)	3.8
Heating Power Input ² (W)	530
Heating Rated Current (A)	3.8
Fan Motor Output x n (W)	400 X 1

DIMENSIONS

Unit Dimensions (in)	Width	48.82
	Height	18.50
	Depth	40.94
Liquid Pipe Connection (in) (I.D.)		3/8
Gas Pipe Connection (in) (I.D.)		3/4
Net Weight (lb)		196
Shipping Weight (lb)		218

OPTIONAL ACCESSORIES

VSTAT02P-1 Touch Screen Wired Controller	37P79
VSTAT04P-1 Individual Wired Controller	37Y74
VSTAT01P-1 Wireless Remote Controller	37Y73




NOTES

1. Specification may be subject to change without prior notice.
2. Capacities are based on (Equivalent refrigerant piping 25ft, Level differences 0ft);
- Cooling : Indoor temperature 80°F DB, 67°F WB / Outdoor temperature 95°F DB, 75°F WB - Heating : Indoor temperature 70°F DB, 60°F WB / Outdoor temperature 47°F DB, 43°F WB
3. Sound pressure level is acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.



SUBMITTAL DATA - INDOOR UNIT
VHIC076S4-4P
High-Static Ducted

DIMENSIONAL DRAWINGS - MM (IN.)

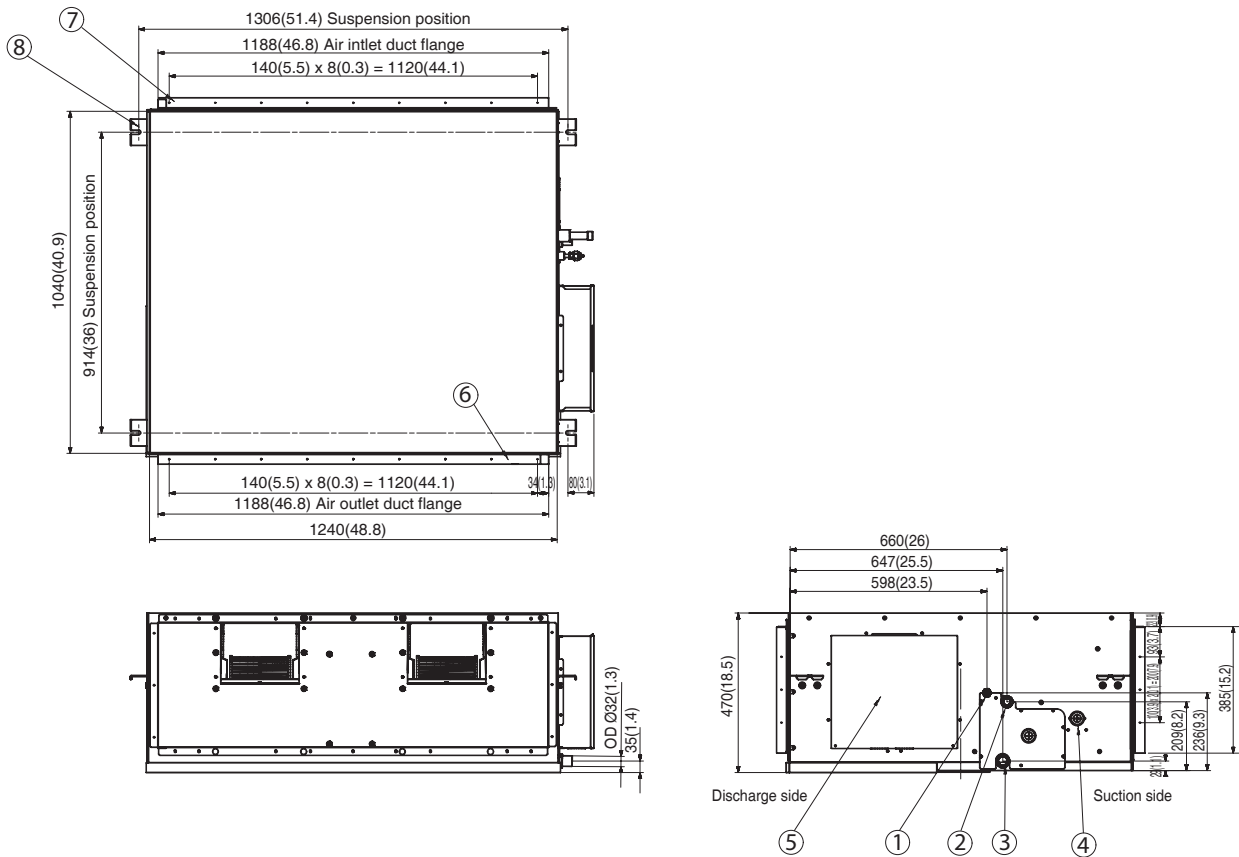

No.	Name	Description
①	Liquid pipe connection	Ø9.52 (3/8")
②	Gas pipe connection	76.0 MBH : Ø19.05 (3/4") 96.0 MBH : Ø22.22 (7/8")
③	Drain pipe connection without optional drain pump kits	VP25 (OD 32, ID 25)
④	Drain pipe connection with optional drain pump kits	VP25 (OD 32, ID 25)
⑤	Power supply/Communication connection	
⑥	Air discharge grille flange	
⑦	Suction flange	
⑧	Hook	3/8" or M10

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability.

Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury.

Installation and service must be performed by a qualified installer and servicing agency.

496127 (202503)

©2025 Lennox Industries Inc.