

SUBMITTAL DATA - WALL-MOUNTED

MWMC006S4-1P

MULTI-ZONE MINI-SPLIT HEAT PUMP

Е	ingineer:
Α	rchitect:
D	ate:
F	or: Reference Reproval Review Construction

FEATURES

Job:
Location:
Schedule No.:
System Designation:

- · Pre Heat Function
- Multi-Refrigerant Outlet
- Auto Restart Three Speed Fan
- Flare Connections
- Refrigerant R-410A
- · LED Readout Panel
- · Wireless Remote Controller included

Product Warranty

All covered components - Twelve year limited warranty. Product registration required.

Product registration required.								
SPECIFICATIONS								
PERFORMANCE								
Cooling Capacity ¹ (Btu/h)	6,000							
Heating Capacity ¹ (Btu/h)	6,000							
Airflow (CFM)	High	318						
	Medium	218						
	Low	168						
External Static Pressure (in. v	w.g.)	-						
Sound Pressure (dBA)	High	36.0						
	Medium	32.0						
	Low	23.0						
ELECTRICAL DATA								
ELECTRICAL DATA								
Power Supply (V/Hz/Φ)		208-230/60/1						
		208-230/60/1 0.25						
Power Supply (V/Hz/Φ)								
Power Supply (V/Hz/Φ) Rated load amps (RLA)		0.25						
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W)	Height	0.25						
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS	Height Width	0.25 20						
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS	-	0.25 20 11-3/4						
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS	Width	0.25 20 11-3/4 33-3/8						
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in)	Width	0.25 20 11-3/4 33-3/8 9						
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in)	Width Depth	0.25 20 11-3/4 33-3/8 9 1/4						
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in) Gas Pipe Connection (in)	Width Depth	0.25 20 11-3/4 33-3/8 9 1/4 3/8						
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in) Gas Pipe Connection (in) Condensate drain connection	Width Depth	0.25 20 11-3/4 33-3/8 9 1/4 3/8						



OPTIONAL ACCESSORIES Non-Programmable Controller (M0STAT61Q-1) Non-Programmable Controller (M0STAT120L-1) Programmable Controller (M0STAT64Q-2)

NOTES

1. Cooling and Heating capacity data is rated at the following conditions:

Cooling: 80°FDB / 67°FWB Indoor, 95°FDB Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor










SUBMITTAL DATA - WALL-MOUNTED


MWMC006S4-**1**P

MULTI-ZONE MINI-SPLIT HEAT PUMP


DIMENSIONAL DRAWINGS - INCHES (MM)



SIDE VIEW

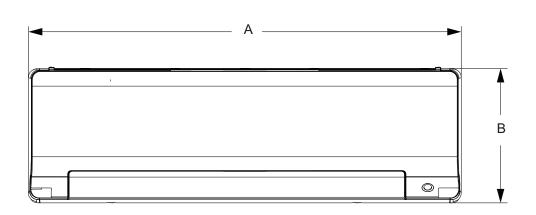

FRONT VIEW

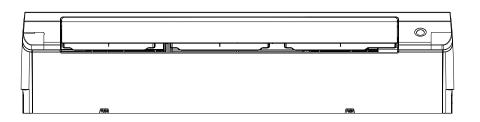

BOTTOM VIEW

Size	Α		В		С	
Size	in.	mm	in.	mm	in.	mm
MWMC009, 012	33-3/8	848	11-3/4	298	9	229
MWMC018	40	1016	12-1/2	318	9-1/2	241
MWMC024, 030	46-7/8	1191	14-5/8	371	11	279