



# SUBMITTAL DATA - CONTROLS

## MOSTAT120L-1

### MINI-SPLIT WIRED NON-PROGRAMMABLE CONTROLLER

Job: \_\_\_\_\_

Engineer: \_\_\_\_\_

Location: \_\_\_\_\_

Architect: \_\_\_\_\_

Schedule No.: \_\_\_\_\_

Date: \_\_\_\_\_

System Designation: \_\_\_\_\_

For: Reference Approval Review Construction


## Wired Non-Programmable Controller

### FEATURES AND FUNCTIONS

- Simple, user friendly design with built in LCD display
- Operation - On/Off
- Operation Mode - Auto / Cool / Dry / Heat / Fan
- Fan Speed - Auto / Low / Medium / High
- °F or °C field selectable - default °F
- Built-In Memory - Maintains clock, fan, speed and mode of operation settings following power outages.
- Dimensions - (H x W x D) - 4-3/4 x 4-3/4 x 7/8 inches (83 x 83 x 22 mm)
- Wiring Requirements - Controller uses 5-wire shielded 20 ft (6 m) extension cable (furnished) for easy low voltage connection to the indoor unit.
- Lock function disables buttons to prevent tampering



### DISPLAY

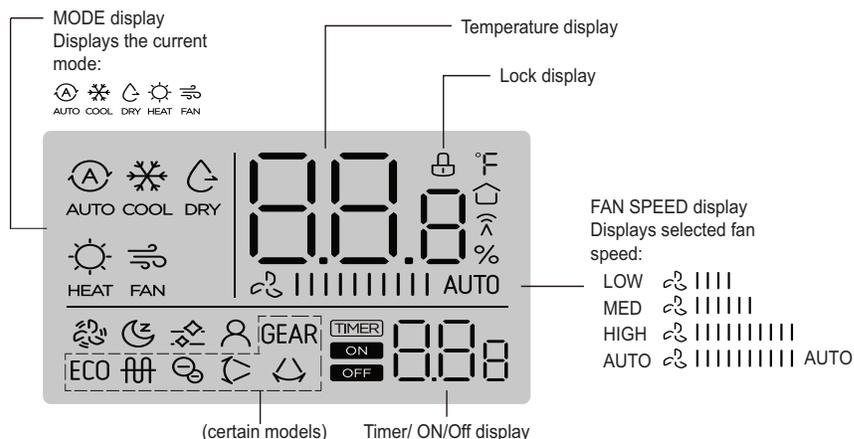

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.