



CUT SIZE: 4-3/4"W x 7"H

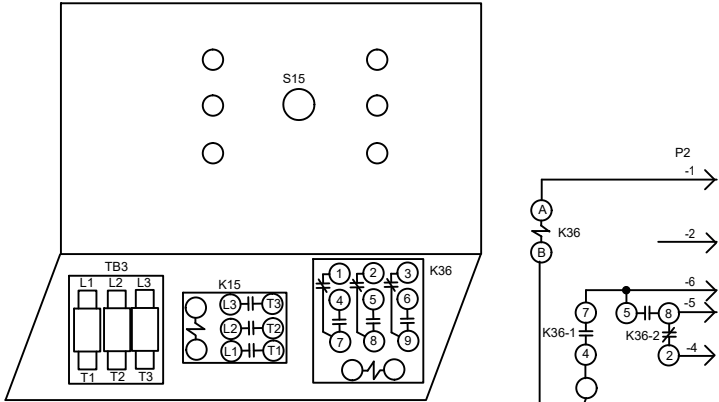

**FUSE SIZE CHART**

| UNIT     | VOLTAGE | FUSE SIZE |
|----------|---------|-----------|
| ECB27-10 | G       | 20A       |
|          | J       | —         |
| ECB27-15 | G       | 25A       |
|          | J       | —         |
| ECB27-20 | G       | 35A       |
|          | J       | —         |
| ECB27-25 | G       | 40A       |
|          | J       | 35A       |

| KEY       | COMPONENT                         |
|-----------|-----------------------------------|
| F3        | FUSE-ELECTRIC HEAT                |
| HE1       | ELEMENT-ELECTRIC HEAT 1           |
| K15-1     | CONTACTOR-ELECTRIC HEAT           |
| K36-1,2,3 | RELAY-HEAT BLOWER                 |
| P2        | PLUG-ELECTRIC HEAT                |
| S15       | SWITCH-LIMIT PRIMARY ELECT HEAT   |
| S20       | SWITCH-LIMIT SECONDARY ELECT HEAT |
| TB3       | TERMINAL STRIP-ELECTRIC HEAT      |

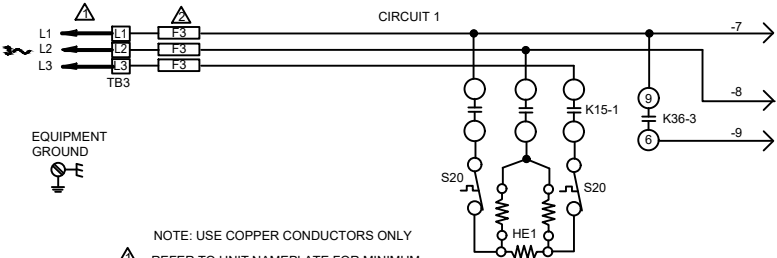


NOTE: USE COPPER CONDUCTORS ONLY  
REFER TO UNIT NAMEPLATE FOR MINIMUM  
CIRCUIT AMPACITY AND MAXIMUM  
OVERCURRENT PROTECTION SIZE.

| LINE VOLTAGE FIELD INSTALLED |                    |
|------------------------------|--------------------|
| HEATING-ELECTRIC             |                    |
| ECB47-10-G                   | ECB47-25-G         |
| ECB47-15-G                   | ECB47-20-J         |
| ECB47-20-G                   | ECB47-25-J         |
| Supersedes                   |                    |
| 05/24                        | Form No. 538461-01 |

© 2009


Litho U.S.A.

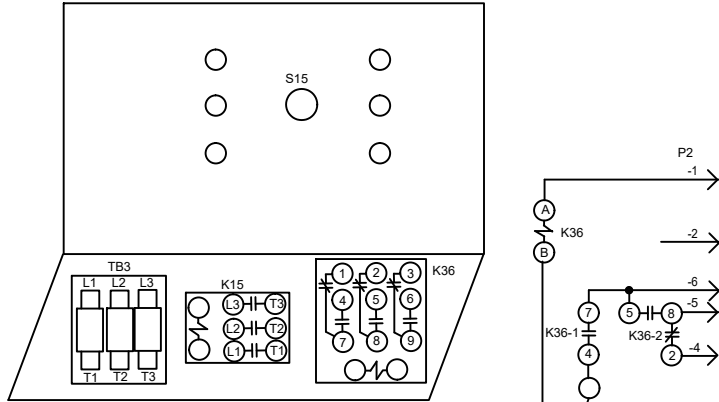

**FUSE SIZE CHART**

| UNIT     | VOLTAGE | FUSE SIZE |
|----------|---------|-----------|
| ECB27-10 | G       | 20A       |
|          | J       | —         |
| ECB27-15 | G       | 25A       |
|          | J       | —         |
| ECB27-20 | G       | 35A       |
|          | J       | —         |
| ECB27-25 | G       | 40A       |
|          | J       | 35A       |

| KEY       | COMPONENT                         |
|-----------|-----------------------------------|
| F3        | FUSE-ELECTRIC HEAT                |
| HE1       | ELEMENT-ELECTRIC HEAT 1           |
| K15-1     | CONTACTOR-ELECTRIC HEAT           |
| K36-1,2,3 | RELAY-HEAT BLOWER                 |
| P2        | PLUG-ELECTRIC HEAT                |
| S15       | SWITCH-LIMIT PRIMARY ELECT HEAT   |
| S20       | SWITCH-LIMIT SECONDARY ELECT HEAT |
| TB3       | TERMINAL STRIP-ELECTRIC HEAT      |

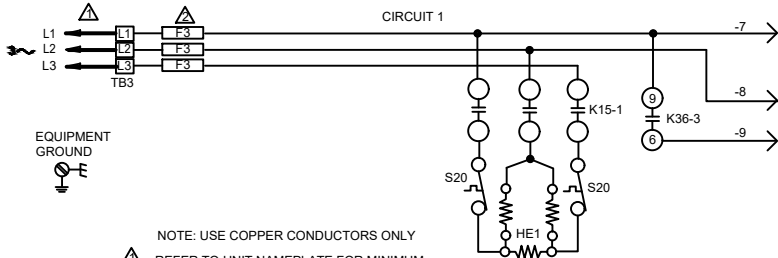

NOTE: USE COPPER CONDUCTORS ONLY  
REFER TO UNIT NAMEPLATE FOR MINIMUM  
CIRCUIT AMPACITY AND MAXIMUM  
OVERCURRENT PROTECTION SIZE.

| LINE VOLTAGE FIELD INSTALLED |                    |
|------------------------------|--------------------|
| HEATING-ELECTRIC             |                    |
| ECB47-10-G                   | ECB47-25-G         |
| ECB47-15-G                   | ECB47-20-J         |
| ECB47-20-G                   | ECB47-25-J         |
| Supersedes                   |                    |
| 05/24                        | Form No. 538461-01 |

© 2009

Litho U.S.A.