



CUT SIZE: 4-3/4"W x 7"H

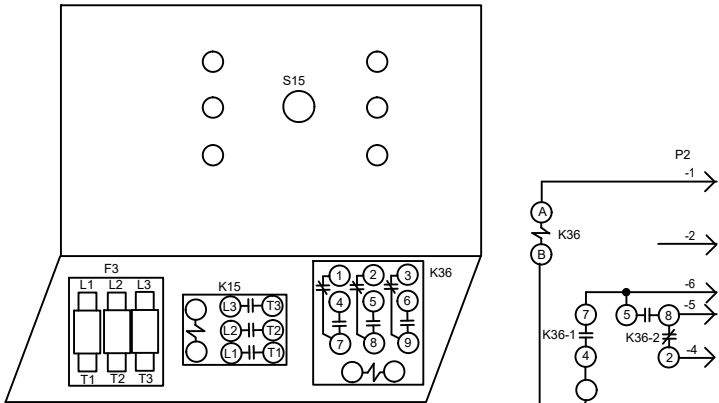

FUSE SIZE CHART

UNIT	VOLTAGE	FUSE SIZE
ECB47-10	G	20A
	J	—
ECB47-15	G	25A
	J	—
ECB47-20	G	35A
	J	—
ECB47-25	G	40A
	J	35A

KEY	DESCRIPTION
F3	FUSE-BLOCK
HE1	ELEMENT-ELECTRIC HEAT 1
K15-1	CONTACTOR-ELECTRIC HEAT
K36-1,2,3	RELAY-HEAT BLOWER
P2	PLUG-ELECTRIC HEAT
S15	SWITCH-LIMIT PRIMARY ELECT HEAT
S20	SWITCH-LIMIT SECONDARY ELECT HEAT

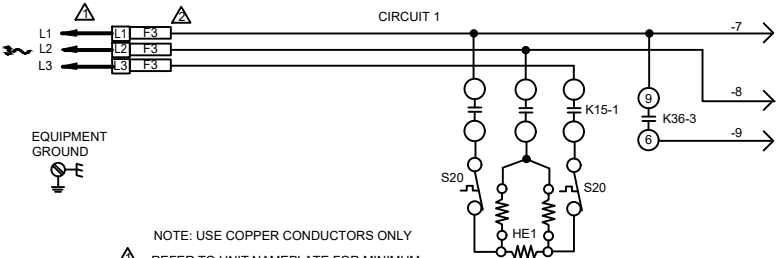


NOTE: USE COPPER CONDUCTORS ONLY
REFER TO UNIT NAMEPLATE FOR MINIMUM
CIRCUIT AMPACITY AND MAXIMUM
OVERCURRENT PROTECTION SIZE.

HEATING-ELECTRIC	
ECB47-10-G	ECB47-25-G
ECB47-15-G	ECB47-20-J
ECB47-20-G	ECB47-25-J
Supersedes	
03/25	Form No. 538461-01

© 2009


Litho U.S.A.

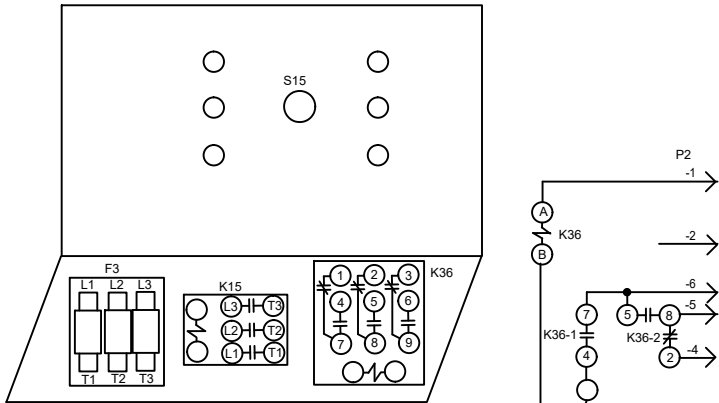

FUSE SIZE CHART

UNIT	VOLTAGE	FUSE SIZE
ECB47-10	G	20A
	J	—
ECB47-15	G	25A
	J	—
ECB47-20	G	35A
	J	—
ECB47-25	G	40A
	J	35A

KEY	DESCRIPTION
F3	FUSE-BLOCK
HE1	ELEMENT-ELECTRIC HEAT 1
K15-1	CONTACTOR-ELECTRIC HEAT
K36-1,2,3	RELAY-HEAT BLOWER
P2	PLUG-ELECTRIC HEAT
S15	SWITCH-LIMIT PRIMARY ELECT HEAT
S20	SWITCH-LIMIT SECONDARY ELECT HEAT

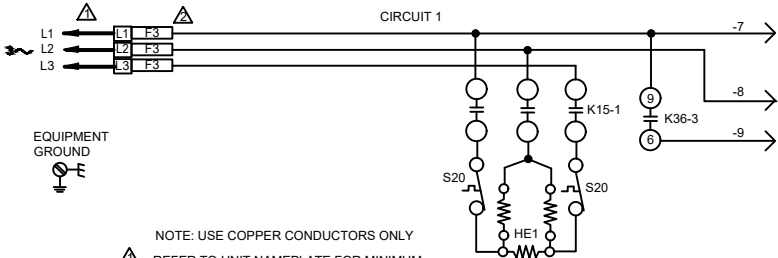

NOTE: USE COPPER CONDUCTORS ONLY
REFER TO UNIT NAMEPLATE FOR MINIMUM
CIRCUIT AMPACITY AND MAXIMUM
OVERCURRENT PROTECTION SIZE.

HEATING-ELECTRIC	
ECB47-10-G	ECB47-25-G
ECB47-15-G	ECB47-20-J
ECB47-20-G	ECB47-25-J
Supersedes	
03/25	Form No. 538461-01

© 2009

Litho U.S.A.