

SUBMITTAL DATA - OUTDOOR UNIT

VRC120W4M-4Y VRF Water Source

Job:		Engineer:			
Location:		Architect:			
Schedule No.:		Location:			
System Designation:		Date:			
Motor Course Outdoor Unit		For: Reference	Annroval	Review	Construction

Water Source Outdoor Unit

FEATURES

- · Heat Pump Models
- Minimal Noise for Maximal Comfort
- · Flexible Installation Options
- · Advanced Plate Heat Exchanger
- · Louver-less Installation
- Renewable Energy Source

WARRANTY

- · Compressor 10-year limited warranty
- All other components 10-year limited warranty *See warranty for details

SPECIFICATIONS		
PERFORMANCE		
Cooling Capacity ¹ (Btu/h)	Nominal	120,000
(Rated ²	114,000
EER	Ducted	12.0
	Non-Ducted	11.4
IEER	Ducted	21.4
	Non-Ducted	20.3
Heating Capacity ¹ (Btu/h)		135,000
COP	Ducted	4.60
	Non-Ducted	4.30
Operating Water Temperatures (°F)	Cooling	50-113
	Heating	50-113

ELECTRICAL DATA	
Power Supply (Volts/Phase/Hertz)	208-230/3/60
Minimum Circuit Ampacity (A)	30
Maximum Overcurrent Protection (A)	50
Compressor Output (kW x n)	4.96 x 1

GENERAL DATA	
Connection Ratio	50% to 130%
Maximum Number of Indoor Units	20
Refrigerant Type	R-410A
Factory Refrigerant Charge (each unit)	13.2 lbs.

Powered by SAMSUNG NATURE NA


DIMENSIONS (Each M	odule)	
Unit	Height	39.4
Dimensions (in)	Width	30.3
	Depth	21.5
Net Weight		353
Main System Piping (in)		
Liquid Pipe Connection		1/2
Gas Pipe Connection		1-1/8

NOTES

- 1. Specification may be subject to change without prior notice.
- 2. * Nominal capacities are based on (Equivalent refrigerant piping: 25ft(7.5m), Level differences: 0ft(0m)
 - a. Cooling : Indoor temperature : 80°F(26.7°C) DB, 67°
 F(19.4°C) WB / Inlet water temperature : 85°F(29.4°C)
 - Heating: Indoor temperature: 70°F(21.1°C) DB, 60° F(15.6°C) WB / Inlet water temperature: 68°F(20°C)
- * Rated capacityes are based on (Equivalent refrigerant piping : 25ft(7.5m), Level differences : 0ft(0m)
 - a. Cooling: Indoor temperature: 80.6°F(27°C) DB, 66.2° F(19°C) WB / Inlet water temperature: 86°F(30°C)
 - Heating: Indoor temperature: 68°F(20°C) DB, 59° F(15°C) WB / Inlet water temperature: 68°F(20°C)



DIMENSIONAL DRAWINGS - MM (Inches)

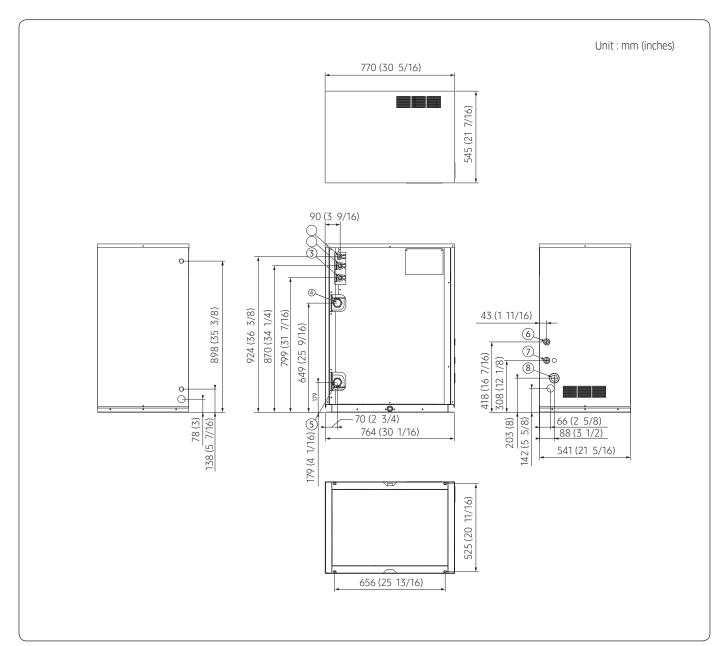

No.	Name	Description No.		No.	Name	Description	
INO.	INdille	6Ton	8Ton	10Ton	INO.	INdiffe	6Ton 8Ton 10Ton
1	Liquid ref. pipe	9.52 (3/8")	9.52 (3/8")	12.70 (1/2")	5	Water inlet pipe	NPT 1-1/4
2	High pressure gas ref. pipe	15.88 (5/8")	19.05 (3/4")	19.05 (3/4")	6	Communication wiring	-
3	Low pressure gas ref. pipe	19.05 (3/4")	22.22 (7/8")	28.58 (1 1/8")	7	External contact wiring	-
4	Water outlet pipe		NPT 1-1/4		8	Power wiring	-