

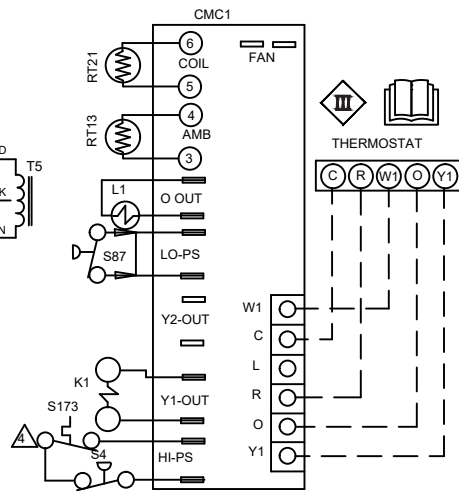
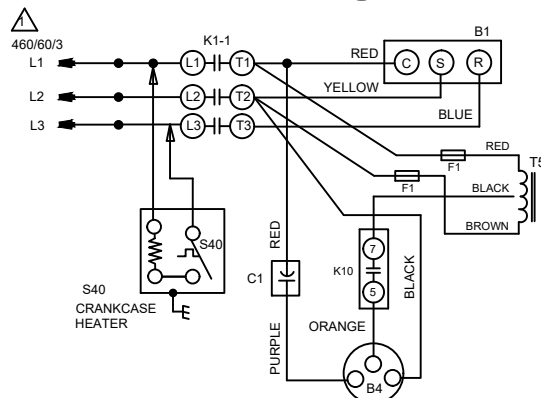
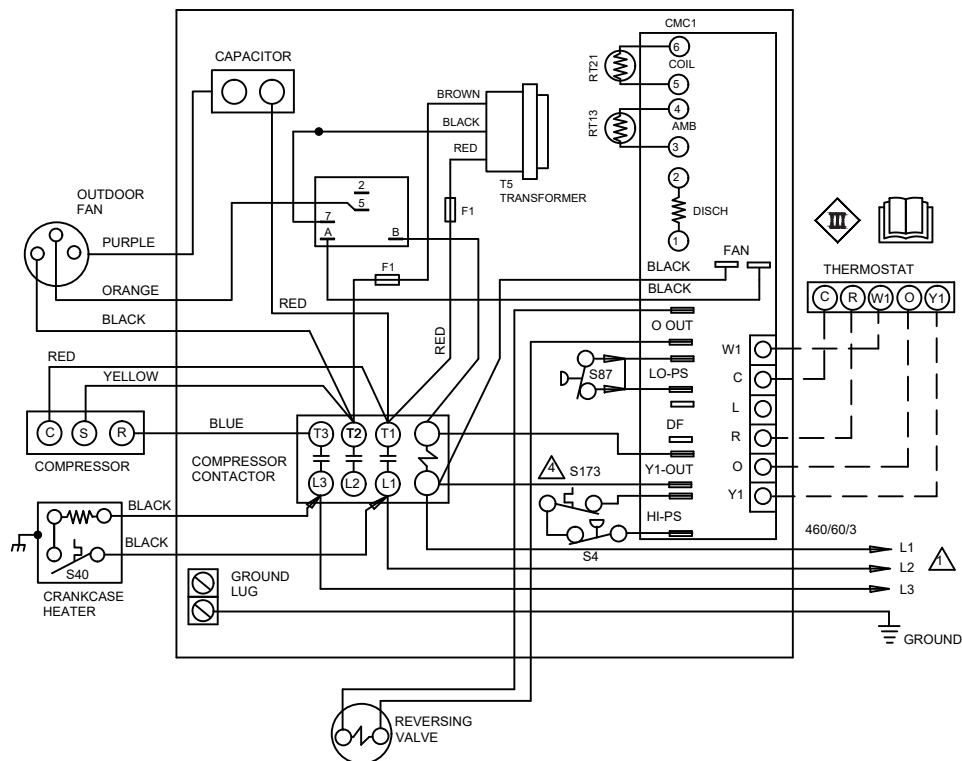


CUT SIZE: 5-3/4" WIDE x 10" TALL



- NOTE- FOR USE WITH COPPER CONDUCTORS ONLY. REFERTO UNIT RATING PLATE FOR MINIMUM CIRCUIT AMOACITY AND MAXIMUM OVERCURRENT PROTECTION SIZE
- NOTE- IF ANY WIRE IN THIS APPLIANCE IS REPLACED, IT MUST BE REPLACED WITH WIRE OF LIKE SIZ, RATING, INSULATION THICKNESS AND TERMINATION
- S41 TO BE MOUNTED IN CONTROL BOX AND WIRED IN PARALLEL WITH LOW PRESSURE SWITCH
- S173 SWITCH USED ONLY IN UNITS EQUIPPED WITH COMPRESSORS WHICH DO NOT INCLUDE INTERNAL SWITCH

KEY	DESCRIPTION
B1	COMPRESSOR
B4	MOTOR-OUTDOOR FAN
C12	CAPACITOR-DUAL
CMC1	CONTROL-DEFROST
F1	FUSE-TRANSFORMER, 5A CLASS CC
HR1	HEATER-COMPRESSOR
K1,-1	CONTACTOR-COMPRESSOR
K10	RELAY
L1	VALVE-REVERSING
S4	SWITCH-HIGH PRESSURE
S6	SWITCH-DEFROST
S40	TERMOSTAT-CRANKCASE
S41	TERMOSTAT-LOW AMBIENT
S87	SWITCH-LOW PRESS, COMP 1
S173	SWITCH-THERMAL PROTECTION



— LINE VOLTAGE FIELD INSTALLED
--- CLASS II VOLTAGE FIELD WIRING
← DENOTES OPTIONAL COMPONENTS

SINGLE SPEED HP

Supersedes

03/25

Form No.
538594-01

©2011

Litho U.S.A.