


FRONT VIEW  
HORIZONTAL OPENING

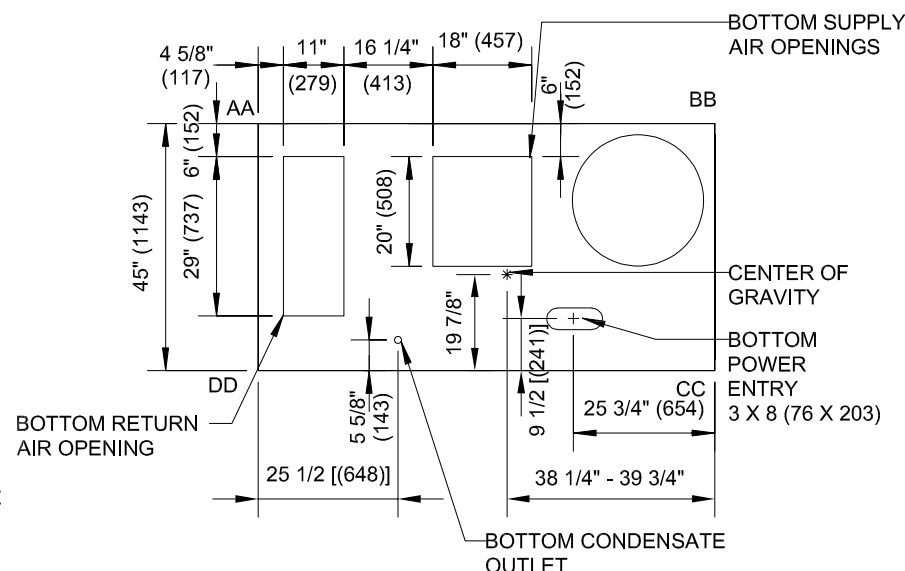

TOP VIEW (Base)


1 Unit Clearance	A		B		C		D		Top Clearance
	in.	mm	in.	mm	in.	mm	in.	mm	
Service Clearance	48	1219	36	914	36	934	36	914	Unobstructed
Clearance to Combustibles	36	914	1	25	1	25	1	25	
Minimum Operation Clearance	36	914	36	914	36	914	36	914	

NOTE - Entire perimeter of unit base requires support when elevated above the mounting surface.


<sup>1</sup> Service Clearance - Required for removal of serviceable parts.

Clearance to Combustibles - Required clearance to combustible material.


Minimum Operation Clearance - Required clearance for proper unit operation.

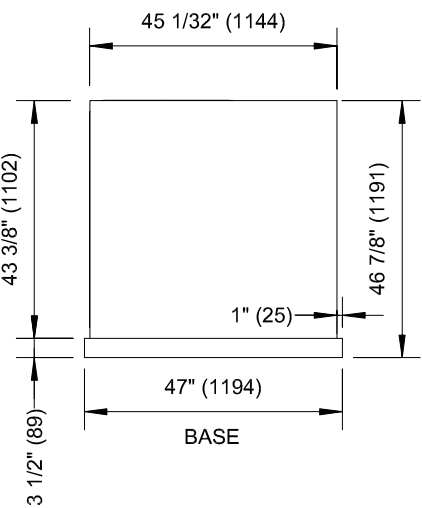

END VIEW

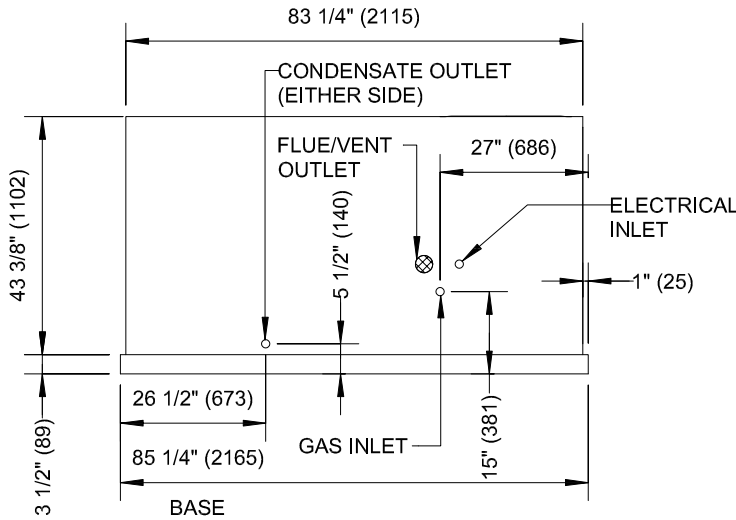

FRONT VIEW

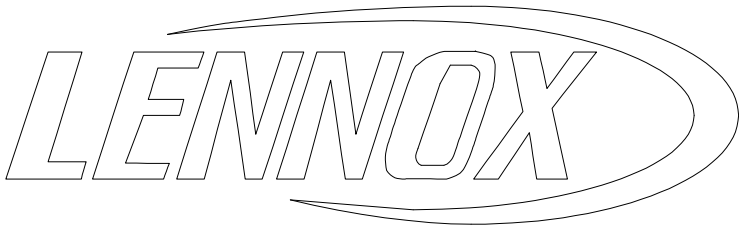

Model L Packaged Gas Heat w/ Electric Cooling, Ultra-High Efficiency Rooftop Units

Series: Model L

Nominal Cooling Capacity (Tons): 3-6 Ton

Model: LGM

LGM

Scale: N.T.S.