


FRONT VIEW
HORIZONTAL OPENING

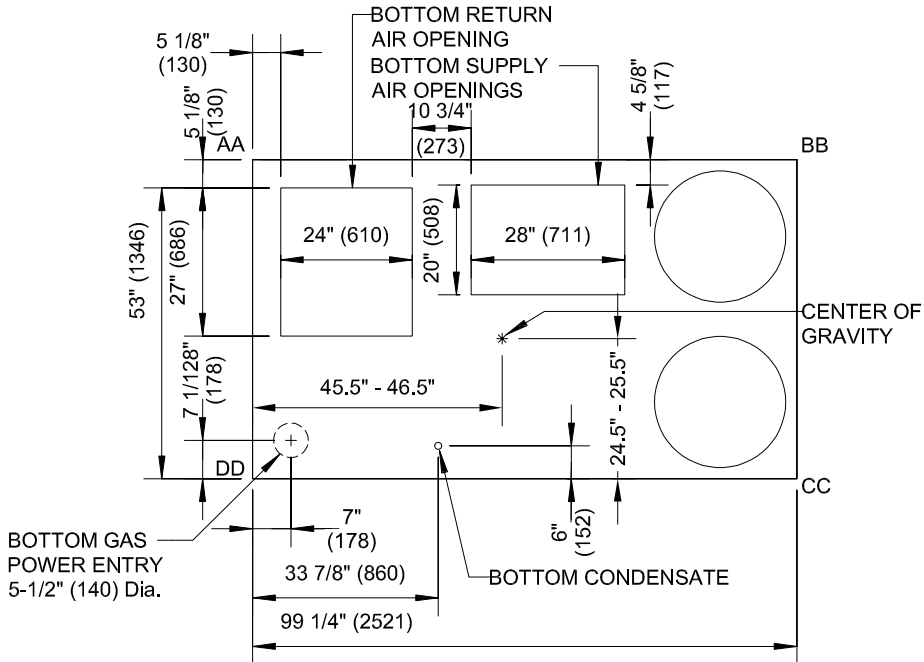

TOP VIEW (Base)


1 Unit Clearance	A		B		C		D		Top Clearance
	in.	mm	in.	mm	in.	mm	in.	mm	Unobstructed
Service Clearance	60	1524	36	914	36	934	60	1524	
Clearance to Combustibles	36	914	1	25	1	25	1	25	
Minimum Operation Clearance	36	914	36	914	36	914	36	914	

NOTE - Entire perimeter of unit base requires support when elevated above the mounting surface.

1 Service Clearance - Required for removal of serviceable parts.


Clearance to Combustibles - Required clearance to combustible material.

Minimum Operation Clearance - Required clearance for proper unit operation.

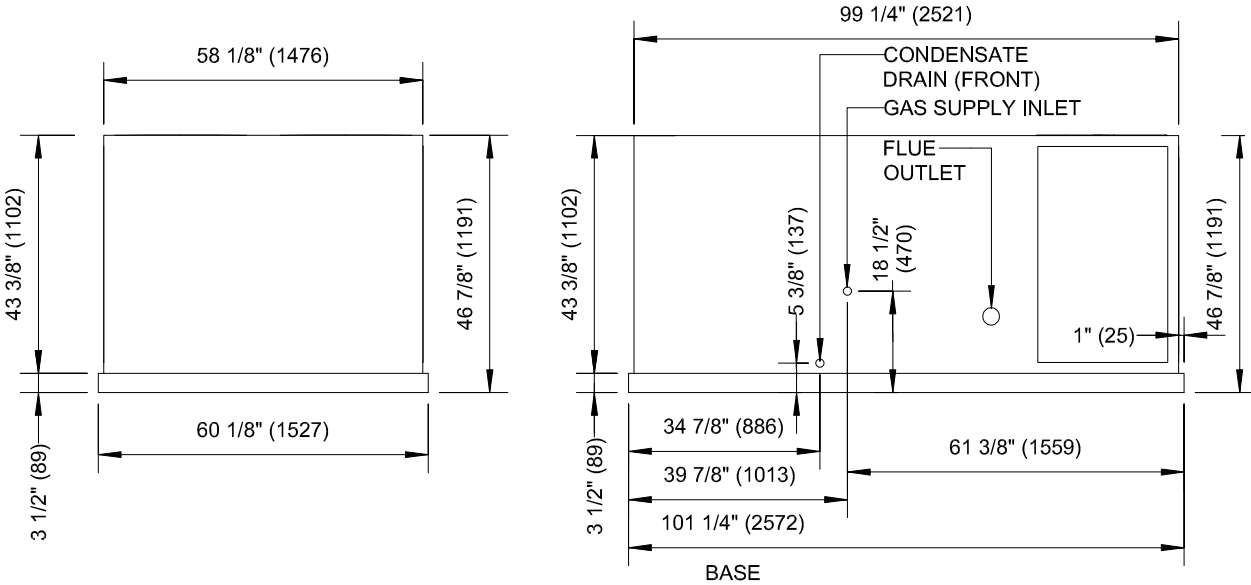

END VIEW

SIDE VIEW

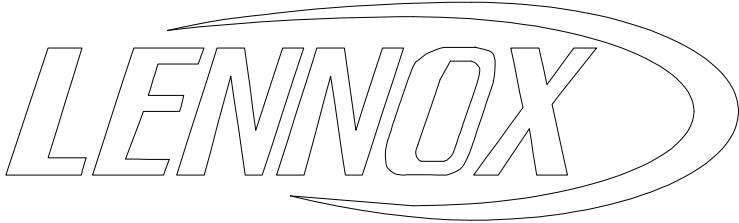

Model L Packaged Gas Heat w/ Electric Cooling, Ultra-High Efficiency Rooftop Units

Series: Model L

Nominal Cooling Capacity (Tons): 7.5-12.5 Ton

Model: LGM

LGM

Scale: N.T.S.