

Job: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Schedule No.: \_\_\_\_\_  
 System Designation: \_\_\_\_\_

Engineer: \_\_\_\_\_  
 Architect: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Date: \_\_\_\_\_

For:    Reference    Approval    Review    Construction

## Vertical Air Handler Ducted Indoor Unit

### FEATURES

- Pre Heat Function
- Auto Addressing
- Auto Restart
- Optional Electric Heat
- Electronic Expansion Valve
- High-Efficiency DC Motor
- Four Built-In Dry Contacts Relays
- Brazed Connections
- Refrigerant R-410A
- Vertical, Horizontal-left or Horizontal-right air discharge installations
- Eight Capacity Sizes from 12,000 to 60,000 Btu/h

### WARRANTY

- 10-year limited warranty.\*See warranty for details.

### SPECIFICATIONS

#### PERFORMANCE

Cooling Capacity <sup>1</sup> (Btu/h)	53,500
Heating Capacity <sup>1</sup> (Btu/h)	60,000
Airflow (CFM)	Low/Medium/High 1260/1530/1800
External Static Pressure (in. WC)	0~0.8
Sound Pressure (dBA)	Low/Medium/High 51/55.7/60.5
Vertical Install	
Sound Pressure (dBA)	Low/Medium/High 46.7/ 51.8/56
Horizontal Install	

#### ELECTRICAL DATA

Power Supply (Volts/Phase/Hertz)	208/230V-1Ph-60Hz
Minimum Circuit Ampacity (MCA)	7.2
Max. Overcurrent Protection (MOCP)	15
Cooling Power Input <sup>2</sup> (W)	585
Cooling Rated Current (A)	4.3
Heating Power Input <sup>2</sup> (W)	632
Heating Rated Current (A)	4.5
Indoor Fan Motor Input (W)	466(H:75Pa)

#### DIMENSIONS

Unit Dimensions (in)	Height	53-3/4
	Width	22
	Depth	24
Liquid Pipe Connection (in)		3/8
Gas Pipe Connection (in)		5/8
Condensate Drain Connection (in)		3/4 NPT(I.D.)
Unit Shipping Weight (lb)		189
Unit Net Weight (lb)		163

### NOTES

1. Cooling and Heating capacity data is rated at the following conditions:  
 Cooling: 80°FDB / 67°FWB Indoor, 95°FDB  
 Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor.
2. Power Input values are rated at high fan speed.




### ELECTRIC HEATER

5 kW (V8EH0050P-1P)	
7.5 kW (V8EH0080P-1P)	
Non-Programmable Controller	V0STAT54P-3
Programmable Wired Controller	V0STAT51P-3
Infrared Wireless Controller	V0STAT52P-1
Occupancy Sensor	V0SNSR78P-3
Hotel Keycard Interface	V0CTRL88P-1
HHE Relay Kit	V0CTRL92P-3
Condensate Pumps (Reference Condensate Pump Selection Guide)	-



**DIMENSIONAL DRAWINGS - INCHES (MM)**

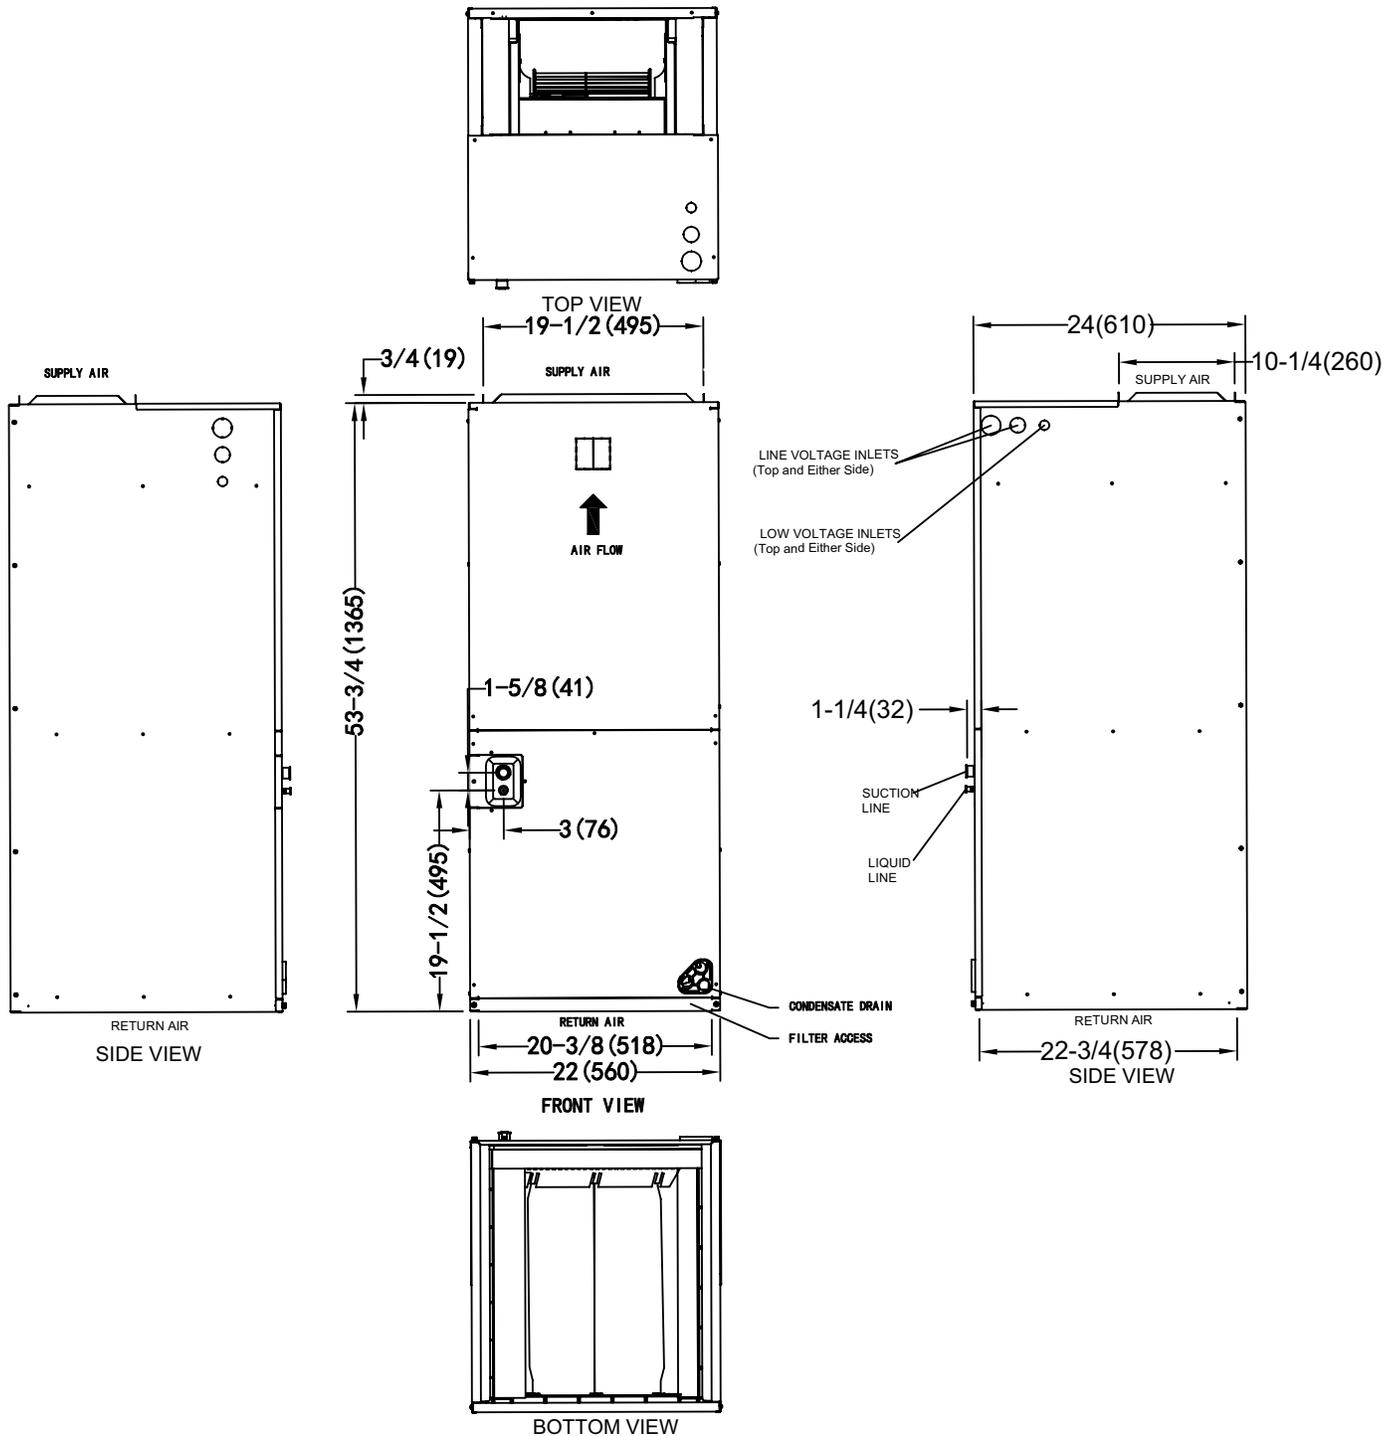

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.