

Job:
Location:
Schedule No.:
System Designation:

Engineer:
Architect:
Location:
Date:

For: Reference Approval Review Construction

4 - Way 2 x 2 Cassette Indoor Unit

FEATURES

- Enhanced comfort control
- 4 - Way 2 x 2
- Aesthetic panel and display
- Ultra-compact size
- Light, robust design
- Low maintenance and powerful airflow
- Refrigerant R-32
- Six Capacity Sizes from 5,000 to 20,000 Btu/h

WARRANTY

- 10-year limited warranty.*See warranty for details.

SPECIFICATIONS

PERFORMANCE

| | |
|---------------------------------------|-----------------------------|
| Cooling Capacity ¹ (Btu/h) | 5,000 |
| Heating Capacity ¹ (Btu/h) | 6,000 |
| Airflow (CFM) | Low/Medium/High 230/254/300 |
| External Static Pressure (in.w.g.) | - |
| Sound (dBA) | Low/Medium/High 23/28/30 |

ELECTRICAL DATA

| | |
|--------------------------------------|-------------------|
| Power Supply (Volts/Phase/Hertz) | 208/230V-1Ph-60Hz |
| Minimum Circuit Ampacity (MCA) | 0.24 |
| Max. Overcurrent Protection (MOCP) | 15 |
| Cooling Power Input ² (W) | 18 |
| Cooling Rated Current (A) | 0.17 |
| Heating Power Input ² (W) | 18 |
| Heating Rated Current (A) | 0.17 |
| Fan Motor Output (W) | 65 x 1 |

DIMENSIONS

| | | |
|-----------------------------|--------|-------|
| Unit Dimensions (in) | Width | 22.64 |
| | Height | 9.84 |
| | Depth | 22.64 |
| Panel Dimensions (in) | Width | 24.41 |
| | Height | 1.42 |
| | Depth | 24.41 |
| Liquid Pipe Connection (in) | | 1/4 |
| Gas Pipe Connection (in) | | 1/2 |
| Net Weight (lb) | | 25.4 |
| Shipping Weight (lb) | | 30.0 |
| Panel Shipping Weight (lb) | | 8.6 |
| Panel Net Weight (lb) | | 6 |

OPTIONAL ACCESSORIES

| | |
|--|-------|
| 4-Way (2x2) CST White Pannel, WiFi | 37P65 |
| Motion Detector Sensor 4-Way (2 X 2) CST | 37Y85 |
| VSTAT02P-1 Touch Screen Wired Controller | 37P79 |
| VSTAT04P-1 Individual Wired Controller | 37Y74 |
| VSTAT01P-1 Wireless Remote Controller | 37Y73 |



NOTES

- Specification may be subject to change without prior notice.
- Performances are based on the following test conditions.
 - Cooling : Indoor temperature : 80°F(26.7°C) DB, 67°F(19.4°C) WB, Outdoor temperature : 95°F(35°C) DB, 75°F(23.9°C) WB
 - Heating : Indoor temperature : 70°F(21.1°C) DB, 60°F(15.6°C) WB, Outdoor temperature : 47°F(8.3°C) DB, 43°F(6.1°C) WB
 - Equivalent refrigerant piping length 7.5m(24.6ft), Level differences : 0m(0ft)
- Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.
- These products contain R32 (GWP=675) which is fluorinated greenhouse gas.
- Select wire size based on the value of MCA




NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

496210 (202412)

©2024 Lennox Industries Inc..

DIMENSIONAL DRAWINGS - MM (IN.)

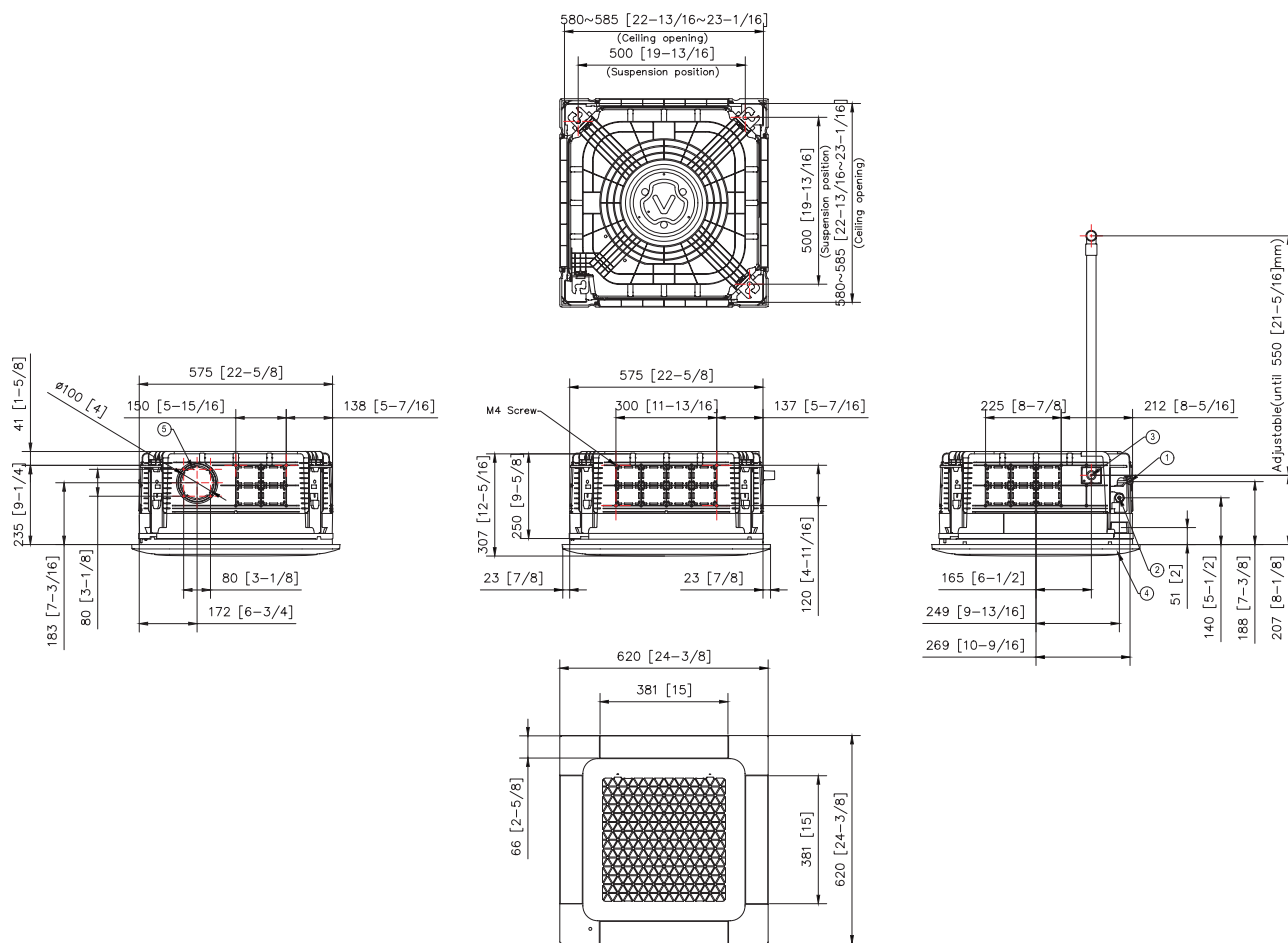

| N.o | Name | Description |
|-----|---|-----------------------|
| 1 | Liquid pipe connection | Φ6.35(1/4) |
| 2 | Gas pipe connection | Φ12.7(1/2) |
| 3 | Drain pipe connection | VP25 (OD 32,ID 25) |
| 4 | Power supply & Communication wiring conduit | |
| 5 | Sub duct connection | Use M4 Screw |
| 6 | Fresh air intake knockout hole | Φ10[4] , Use M4 Screw |