


IF ANY WIRE IN THIS APPLIANCE IS REPLACED, IT MUST BE REPLACED WITH WIRE OF LIKE SIZE, RATING, INSULATION THICKNESS AND TERMINATION

WARNING-ELECTRIC SHOCK HAZARD, CAN CAUSE INJURY OR DEATH. UNIT MUST BE GROUNDED IN ACCORDANCE WITH NATIONAL AND LOCAL CODES

DISCONNECT ALL POWER BEFORE SERVICING

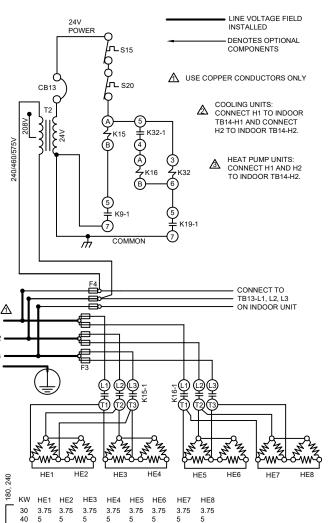

KEY	COMPONENT
CB13	CIRCUIT BREAKER, TRANSFORMER T2
F3	FUSE-ELECTRIC HEAT
F4	FUSE-UNIT
HE1	ELEMENT-ELECTRIC HEAT 1
HE2	ELEMENT-ELECTRIC HEAT 2
HE3	ELEMENT-ELECTRIC HEAT 3
HE4	ELEMENT-ELECTRIC HEAT 4
HE5	ELEMENT-ELECTRIC HEAT 5
HE6	ELEMENT-ELECTRIC HEAT 6
HE7	ELEMENT-ELECTRIC HEAT 7

KEY	COMPONENT
HE8	ELEMENT-ELECTRIC HEAT 8
K9,-1	RELAY-HEAT
	CONTACTOR-ELECTRIC HEAT 1
	CONTACTOR-ELECTRIC HEAT 2
	RELAY-STAGE TWO HEAT
K32,-1	RELAY-SEQUENCER ELECT HT 2
S15	SWITCH-LIMIT, PRIMARY, ELECT HT
S20	SWITCH-LIMIT, SECONDARY ELECT HT
T2	TRANSFORMER-ELECTRIC HEAT

▽ 	₩ :- WIRING DIAGRAM	01/25
	le.	
	538603-01	
	HEATING - ELECTRIC	
	ELELL ELITE 100 240 LINITS V	
	ELEH - ELITE 180,240 UNITS - Y	
	30,40 kW	
	SECTION B3	REV 0
Supersedes	New Form No.	
	538603-01	
Ļ	330003-01	
© 2025	Lannov Co	ommorcia