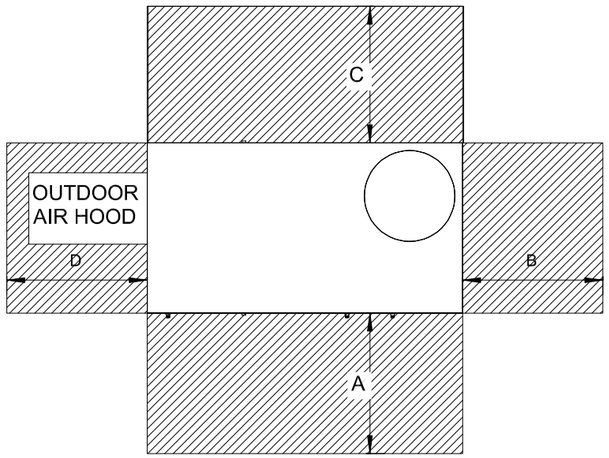


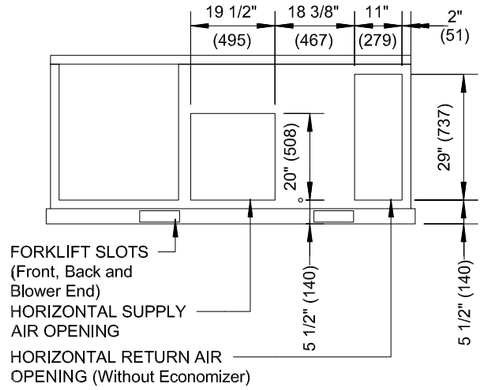


# FRONT VIEW
# (Horizontal Openings)

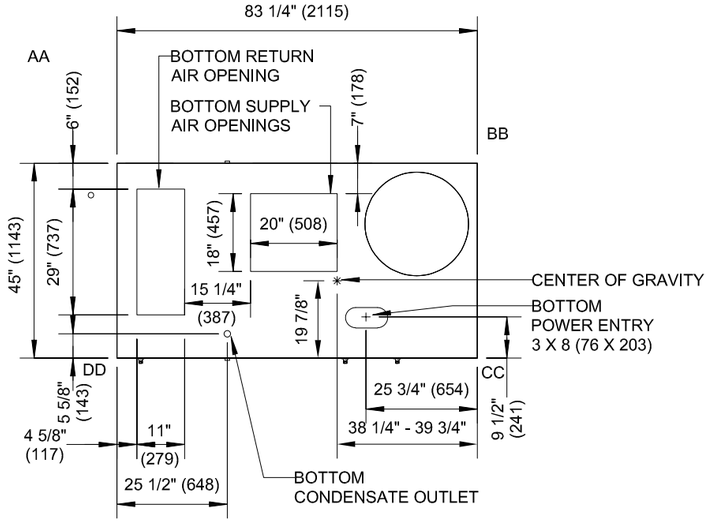


# TOP VIEW (Base)

| [1] Unit Clearance | A | | B | | C | | D | | Top Clearance |
|---|---|---|---|---|---|---|---|---|---|
| | in. | mm | in. | mm | in. | mm | in. | mm | |
| Service Clearance | 36 | 914 | 36 | 914 | 36 | 934 | 36 | 914 | Unobstructed |
| Minimum Operation Clearance | 36 | 914 | 36 | 914 | 36 | 914 | 36 | 914 | |

NOTE - Entire perimeter of unit base requires support when elevated above the mounting surface.
[1] Service Clearance - Required for removal of serviceable parts.
Minimum Operation Clearance - Required clearance for proper unit operation.

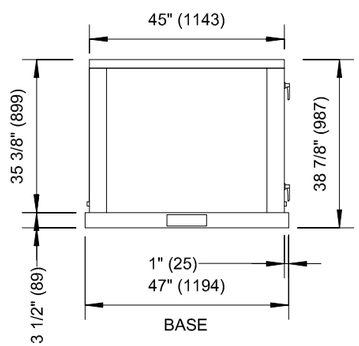


# END VIEW

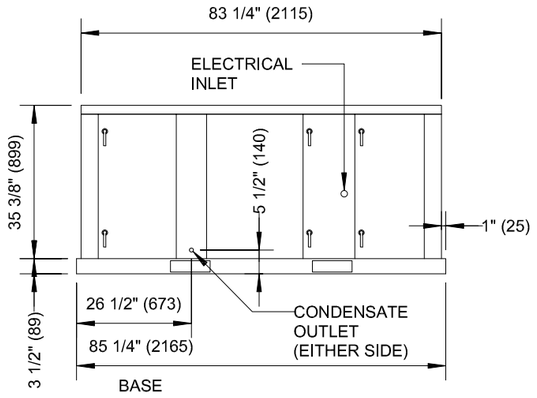


# SIDE VIEW

LENNOX

# Enlight™ Packaged Electric High Efficiency Rooftop Units

Series: Enlight™

Nominal Cooling Capacity (Tons): 3-6 Ton

Model: LCT

LCT

Scale: N.T.S.

02-11-2025 10:34:28