
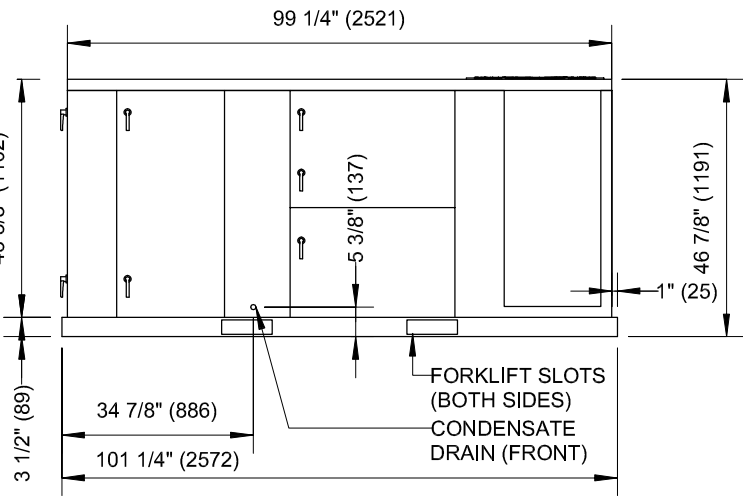


FRONT VIEW
(Horizontal Openings)

TOP VIEW (Base)


1 Unit Clearance	A		B		C		D		Top Clearance
	in.	mm	in.	mm	in.	mm	in.	mm	
Service Clearance	60	1524	36	914	36	934	60	1524	Unobstructed
Minimum Operation Clearance	36	914	36	914	36	914	36	914	

NOTE - Entire perimeter of unit base requires support when elevated above the mounting surface.
1 Service Clearance - Required for removal of serviceable parts.
Minimum Operation Clearance - Required clearance for proper unit operation.

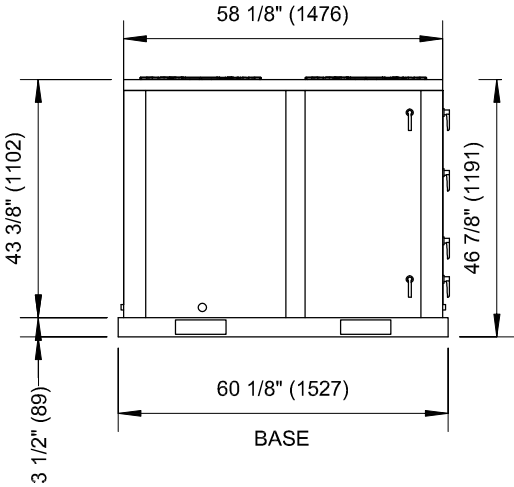

END VIEW

SIDE VIEW

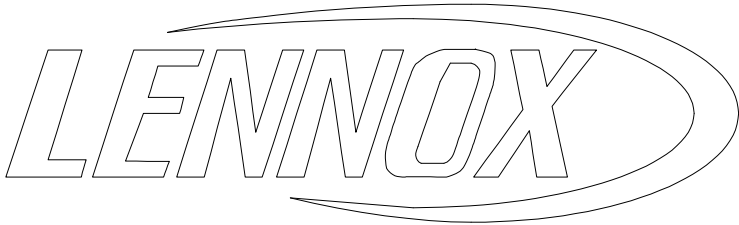

Enlight™ Packaged Electric High Efficiency Rooftop Units

Series: Enlight™

Nominal Cooling Capacity (Tons): 7.5-12.5 Ton

Model: LCT

LCT

Scale: N.T.S.