



SUBMITTAL DATA - CONTROLS

M0STAT60Q-1

MINI-SPLIT HEAT PUMP

Job: _____
 Location: _____
 Schedule No.: _____
 System Designation: _____

Engineer: _____
 Architect: _____
 Date: _____
 For: Reference Approval Review Construction

Wireless Remote Controller

FEATURES AND FUNCTIONS


- Operation - On/Off
- Operation Mode - Auto / Cool / Dry / Heat / Fan
- Fan Speed - Auto / Low / Medium / High
- Dedicated buttons for quick access modes such as sleep mode, turbo mode, self-cleaning mode, quiet mode and frost prevention
- °F or °C field selectable - default °F
- Backlit LED display for easy visibility
- Swing button allows louver adjustment for non-ducted indoor units
- Timer function enables timed on/off operation of indoor unit
- Remote controller holder with mounting screws is included

SPECIFICATIONS

PERFORMANCE	
Power Supply	2 AAA Batteries (included)
Setpoint Range	62°F ~ 86°F
Operating Temperature Range	23°F ~ 140°F
Operating Humidity Range (RH)	40% ~ 90%
Effective Receiving Range	26ft



DISPLAY

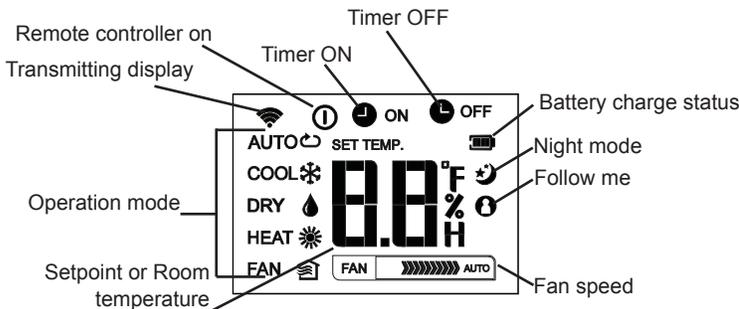

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.