



SUBMITTAL DATA – WALL MOUNTED

MHB009S4S-1P – MWHB009S4-1P

SINGLE ZONE MINI-SPLIT HEAT PUMP

Job: _____
Location: _____
Schedule No.: _____
System Designation: _____

Engineer: _____
Architect: _____
Date: _____
For: Reference Approval Review Construction

FEATURES

Outdoor Unit: MHB009S4S-1P



- DC Inverter Control
- Compressor Overcurrent Protection
- Defrost Control

Indoor Unit: MWHB009S4-1P



- Pre Heat Function
- Auto Restart
- Three Selectable Fan Speeds
- Flare Connections
- LED Readout
- Wireless Remote Included

PIPING

Line Set and Elevation Guidelines

Maximum Line Set Length ft. (m)	82 (25)
Maximum Elevation - Outdoor Unit Below/Above Indoor Unit ft. (m)	33 (10)
Liquid Line Set Diameter (in.)	1/4
Gas Line Set Diameter (in.)	3/8
Pre-Charged (ft.)	25
Additional Charge Per Ft. (oz.)	0.16

PRODUCT WARRANTY

Compressor – Seven year limited warranty
 All other covered components - Five year limited warranty

OPTIONAL ACCESSORIES

Non-Programmable Controller (M0STAT61Q-1)
 Programmable Controller (M0STAT64Q-2)
 Hail Guard Set (M9GARD20Q-1/24M82)



NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.
 495979 (202308) ©2023 Lennox Industries, Inc.



SUBMITTAL DATA - WALL MOUNTED




MHB009S4S-1P - MWHB009S4-1P

SINGLE ZONE MINI-SPLIT HEAT PUMP

OUTDOOR SPECIFICATIONS

PERFORMANCE		GENERAL DATA	
Cooling Capacity (Btu/h) ¹	9,000	Connection Ratio (%)	100%
EER2	12.6	Max. # of Indoor Units	1 unit
SEER2	21.7	Sound Data (dBA)	54.5
Heating Capacity (Btu/h) ¹	10,000	Refrigerant type	R-410A
HSPF2	9.4	Factory refrigerant charge	1 lbs. 13 oz.
Outdoor Fan Total Air Volume (CFM)	1,294	DIMENSIONS	
Ambient Temperature Operating Range		Unit Dimensions (in)	Height 21-7/8
Cooling	5°F - 122°F	Width	32-7/8
Heating	5°F - 86°F	Depth	11-1/4
ELECTRICAL DATA		Shipping Weight (lb)	61
Power Supply (V/Hz/Φ)	208/230/60/1	Net Weight (lb)	55
Minimum Circuit Ampacity (A)	12	NOTES	
Maximum Overcurrent Protection (A)	15	1. Cooling and Heating Capacity data is rated at the following conditions:	
Outdoor Fan Motor RLA (A)	0.4	Cooling: 80°FDB / 67°FWB Indoor, 95°FDB Outdoor	
No. of Compressors	1	Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor	

OUTDOOR DIMENSIONAL DRAWINGS - INCHES (MM)

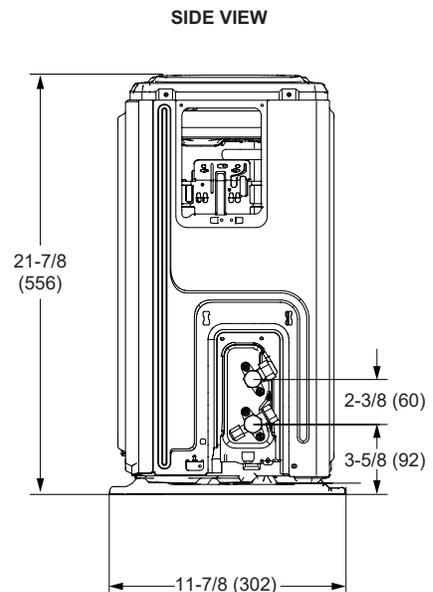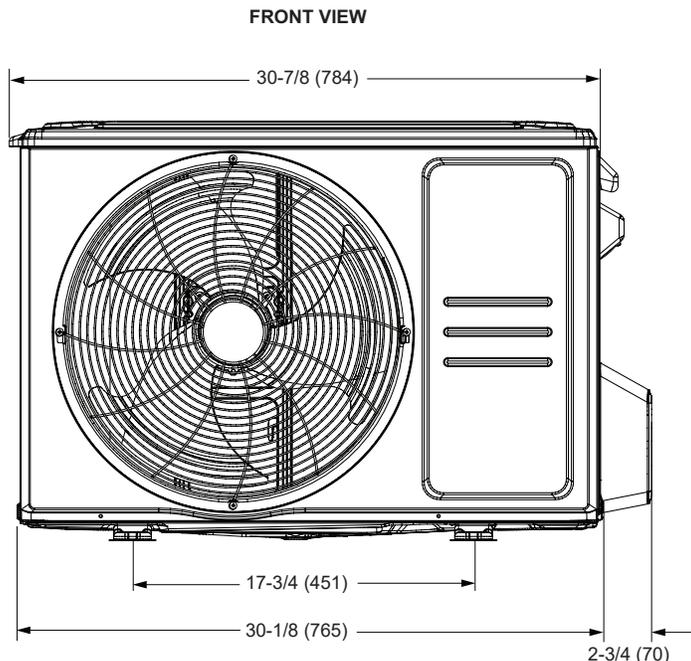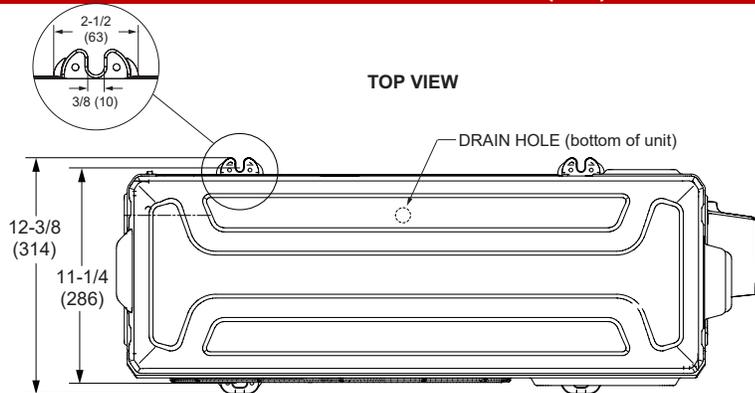

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. 495979 (202308) ©2023 Lennox Industries, Inc.



SUBMITTAL DATA - **WALL-MOUNTED**

MHB009S4S-1P - MWHB009S4-1P

SINGLE ZONE MINI-SPLIT HEAT PUMP

INDOOR SPECIFICATIONS

PERFORMANCE

Airflow (CFM)	High	246
	Medium	176
	Low	141
Sound Pressure (dBA)	High	37
	Medium	28
	Low	20

ELECTRICAL DATA

Power Supply (V/Hz/Φ)	Supplied by ODU
Rated load amps (RLA)	3.11
Power Output (W)	13

DIMENSIONS


Unit Dimensions (in)	Height	11-1/2
	Width	28-3/4
	Depth	8-1/8

Unit Net/Shipping Weight (lb)	18/23
-------------------------------	-------


PIPING

Liquid/Gas O.D. Flare (in.)	1/4 , 3/8
Drain Connection O.D. (in.)	1


INDOOR DIMENSIONAL DRAWINGS - INCHES (MM)

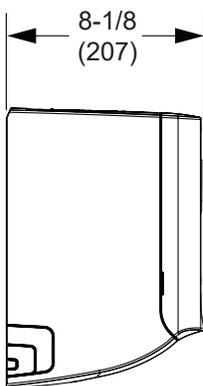

SIDE VIEW

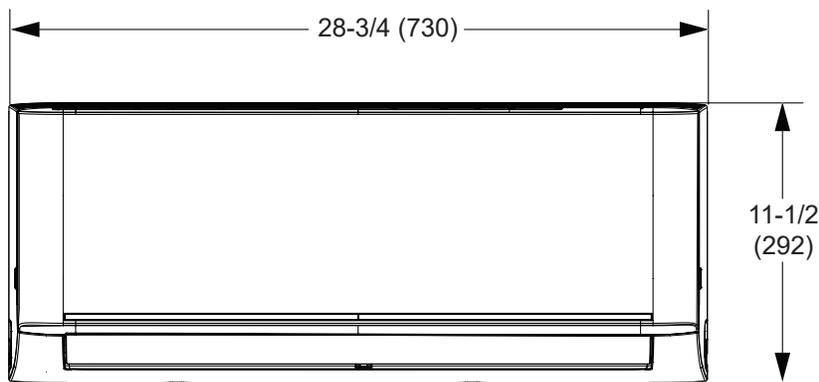

FRONT VIEW

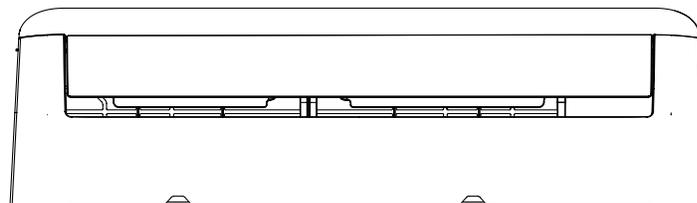

BOTTOM VIEW

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.
 495979 (202308) ©2023 Lennox Industries, Inc.