



VRF
V33B

High Efficiency 360° Cassette Indoor Models - 60 Hz

**COMMERCIAL
PRODUCT SPECIFICATIONS**

Bulletin No. 210885
April 2019

Low-sound, high efficiency cassette, encased in galvanized steel offers 360° airflow for immediate, equal distribution of wide-range cooling and heating. Cassette has motor-driven dual swing louvers and installs in standard ceilings.



APPROVALS

- Units are ETL certified for the U.S. and Canada

WARRANTY

- **Components** - Limited ten years for qualifying installations. See Warranty Certificate for details

FEATURES


- **360° Airflow Panel** - Allows for even, wide-range cooling and heating
- **Pre-Heat Function** - Delays the operation of the fan until the indoor coil has reached a selected temperature which prevents the discharge of cold air while the system is operating in the "heating" mode
- **Digital Readout/Infrared Receiver Panel** - Mounted on unit. LEDs display unit operation status, and codes for maintenance and servicing. Infrared receiver for use with a wireless remote control (not furnished)

TABLE OF CONTENTS

Air Throw Data	10
Cooling Capacity	12
Dimensions	4
Heating Capacity	16
Installation Clearances	5
Model Number Identification.	1
Sound Data	5
Specifications	2
009 - 018.	2
024 - 048	3

- **Unit Addressing** - An optional wireless remote control (not furnished) can be used to inquire and modify each indoor unit's address
- **Auto Restart** - Automatically restores the previous function setting if power is interrupted
- **Built-In Condensate Lift Pump** - 28 inches
- **Electronic Expansion Valve** - Assures optimal performance throughout the application range
- **Flare Connections** - Equipped with liquid and gas flare fittings for quick and secure piping
- **Turbo Fan With Backward Curved Blades** - Reduces sound levels and air resistance
- **Three-Stage Fan Speed (High Efficiency DC Motor)** - Fan functions at three levels: low, medium, high
- **Air Filter** - Cleanable air filter is furnished as standard

MODEL NUMBER IDENTIFICATION

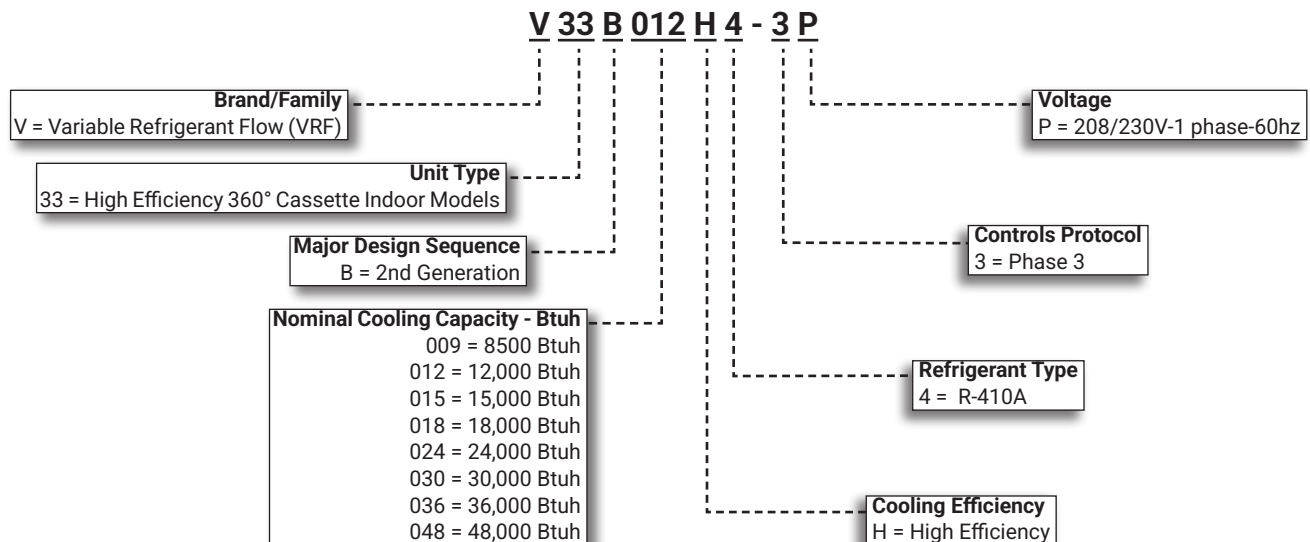

SPECIFICATIONS

009 - 018

General Data		Nominal kBtuh	9	12	15	18
		Model Number	V33B009H4	V33B012H4	V33B015H4	V33B018H4
		Efficiency	High	High	High	High
¹ Cooling Performance	Net Cooling Capacity - Btuh		8,500	12,000	15,000	18,000
	Total Unit Power Input (W)		29	39	59	59
	Rated current (A)		0.35	0.40	0.55	0.55
¹ Heating Performance	Net Heating Capacity - Btuh		10,900	13,600	17,000	21,000
	Total Unit Power Input (W)		22	33	52	52
	Rated current (A)		0.35	0.45	0.55	0.55
Refrigerant	Type		R-410A	R-410A	R-410A	R-410A
Indoor fan motor	Input - W		22	33	54	54
	Speed (high / medium / low) - rpm		440 / 380 / 330	530 / 440 / 380	560 / 500 / 410	560 / 500 / 410
Indoor coil	Number of rows		2	2	3	3
	Fin spacing - in.		1/16	1/16	1/16	1/16
	Coil length x height x width - in.		79 x 6-5/8 x 1-1/2		79 x 10 x 1-1/2	79 x 10 x 1-1/2
	Number of circuits		4	4	12	12
	Tube outside diameter and type - in.		1/4 - Rifled Copper Tubing			
	Fin type		Hydrophilic Coated Aluminum			
	Expansion device type		Electronic Expansion Valve			
	Design Pressure (high / low)- psig		650 / 250			
Indoor Coil Connections	Liquid pipe o.d. - in. (flare)		1/4	1/4	1/4	3/8
	Gas pipe o.d. - in. (flare)		1/2	1/2	1/2	5/8
	Lift pump drain connection o.d. - in.		(1) 1-1/4	(1) 1-1/4	(1) 1-1/4	(1) 1-1/4
Indoor Blower	Airflow (super high/high/medium/low) - cfm		460 / 390 / 330	560 / 460 / 390	680 / 560 / 480	800 / 680 / 560
	Sound data (high / medium / low) dBA		37.7 / 35.1 / 33.6	42.7 / 37.9 / 34.9	46.2 / 42.5 / 38.4	46.3 / 42.7 / 38
Control Wiring (AWG)			2-Core Shielded, Stranded, Polarity Sensitive, 18 AWG			
Weight Data	Unit weight (net / shipping) - lbs.		54 / 71	54 / 71	69 / 86	69 / 86
	Diffuser Panel weight (net / shipping) - lbs.		11 / 18	11 / 18	11 / 18	11 / 18

ELECTRICAL DATA

Line voltage data - 60 hz - 1ph		208/230V	208/230V	208/230V	208/230V
² Maximum overcurrent protection (amps)		15	15	15	15
³ Minimum circuit ampacity		0.5	0.6	0.8	0.8
Indoor Blower Motor - Full load amps		0.4	0.5	0.7	0.7

¹ Nominal capacities are based on the following conditions (with 25 ft. of connecting refrigerant lines);

• Cooling Ratings - 95°F outdoor air temperature and 80°F db/67°F wb entering indoor coil air.

• Heating Ratings - 47°F db/43°F wb outdoor air temperature and 70°F db entering indoor coil air.

² HACR type circuit breaker or fuse.

³ Refer to National or Canadian Electrical Code manual to determine wire, fuse and disconnect size requirements.

SPECIFICATIONS 024 - 048

General Data		Nominal kBtuh	24	30	36	48
		Model Number	V33B024H4	V33B030H4	V33B036H4	V33B048H4
		Efficiency	High	High	High	High
¹ Cooling Performance	Net Cooling Capacity - Btuh		24,000	30,000	36,000	48,000
	Total Unit Power Input (W)		90	90	133	168
	Rated current (A)		0.80	0.80	1.10	1.35
¹ Heating Performance	Net Heating Capacity - Btuh		27,000	34,000	42,000	54,000
	Total Unit Power Input (W)		83	83	127	163
	Rated current (A)		0.80	0.80	1.10	1.40
Refrigerant		Type	R-410A	R-410A	R-410A	R-410A
Indoor fan motor	Input - W		88	88	133	165
	Speed (high / medium / low) - rpm		660 / 560 / 490	660 / 560 / 490	760 / 660 / 570	820 / 760 / 660
Indoor coil	Number of rows		3	3	3	3
	Fin spacing - in.		1/16	1/16	1/16	1/16
	Coil length x height x width - in.		79 x 10 x 1-1/2	79 x 10 x 1-1/2	79 x 10 x 1-1/2	79 x 10 x 1-1/2
	Number of circuits		12	12	12	12
	Tube outside diameter and type - in.		1/4 - Rifled Copper Tubing			
	Fin type		Hydrophilic Coated Aluminum			
	Expansion device type		Electronic Expansion Valve			
Indoor Coil Connections	Liquid pipe o.d. - in. (flare)		3/8	3/8	3/8	3/8
	Gas pipe o.d. - in. (flare)		5/8	5/8	5/8	5/8
	Lift pump drain connection o.d. - in.		(1) 1-1/4	(1) 1-1/4	(1) 1-1/4	(1) 1-1/4
	Design Pressure (high / low)- psig		650 / 250			
Indoor Blower	Airflow (super high/high/medium/low) - cfm		800 / 680 / 560	950 / 800 / 680	1100 / 950 / 800	1200 / 1100 / 950
	Sound data (high / medium / low) dBA		50.5 / 46.4 / 42.8	50.2 / 46.3 / 43.1	54.4 / 50.8 / 46.9	56.6 / 54.4 / 50.7
Control Wiring (AWG)			2-Core Shielded, Stranded, Polarity Sensitive, 18 AWG			
Weight Data	Unit weight (net / gross) - lbs.		69 / 86	69 / 86	69 / 86	69 / 86
	Diffuser Panel weight (net / gross) - lbs.		11 / 18	11 / 18	11 / 18	11 / 18

ELECTRICAL DATA

Line voltage data - 60 hz - 1ph		208/230V	208/230V	208/230V	208/230V
² Maximum overcurrent protection (amps)		15	15	15	15
³ Minimum circuit ampacity		1.3	1.3	1.8	2.2
Indoor Blower Motor - Full load amps		1.0	1.0	1.4	1.8

¹ Nominal capacities are based on the following conditions (with 25 ft. of connecting refrigerant lines);


- Cooling Ratings - 95°F outdoor air temperature and 80°F db/67°F wb entering indoor coil air.
- Heating Ratings - 47°F db/43°F wb outdoor air temperature and 70°F db entering indoor coil air.

² HACR type circuit breaker or fuse.


³ Refer to National or Canadian Electrical Code manual to determine wire, fuse and disconnect size requirements.

DIMENSIONS


NOTE - For Horizontal Installations In a Ceiling Only.

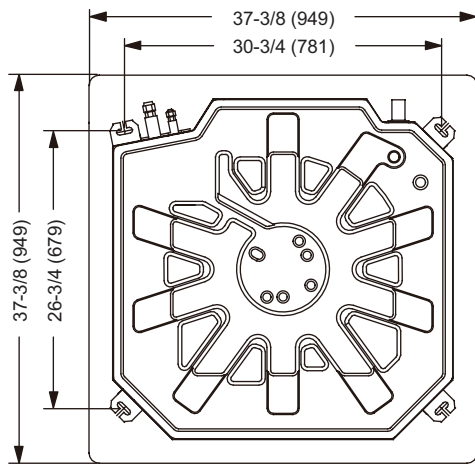


TOP VIEW




2-3/4 (70) dia.
FRESH AIR
INTAKE

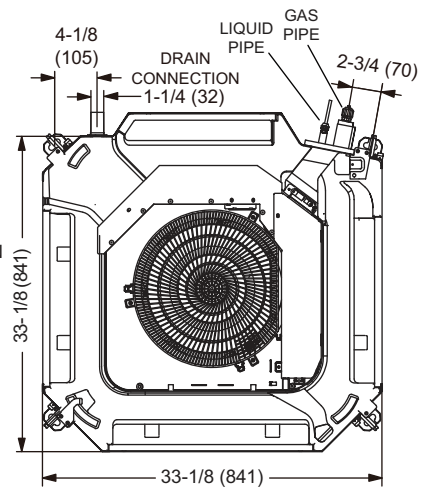


BOTTOM VIEW

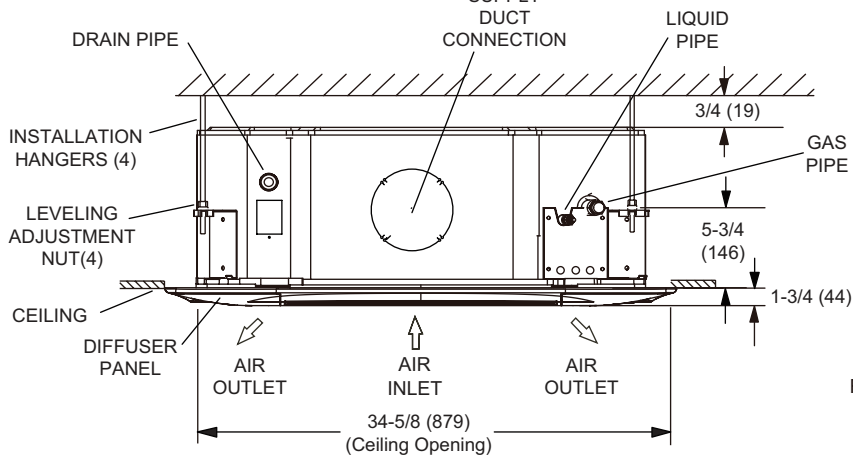

SIDE VIEW

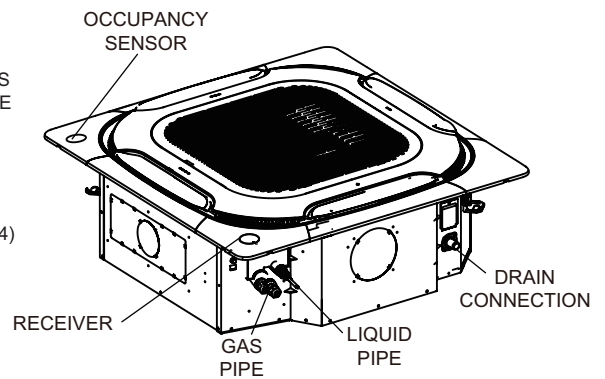


BOTTOM (PANEL) VIEW

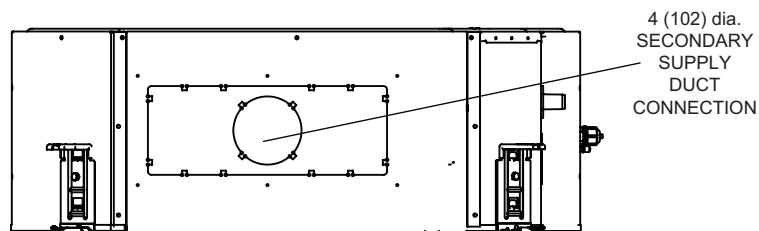

SIDE VIEW

Size	A	
	in.	mm
009, 012	9	229
015, 018, 024, 030, 036, 048	11-7/8	302

INSTALLATION CLEARANCES

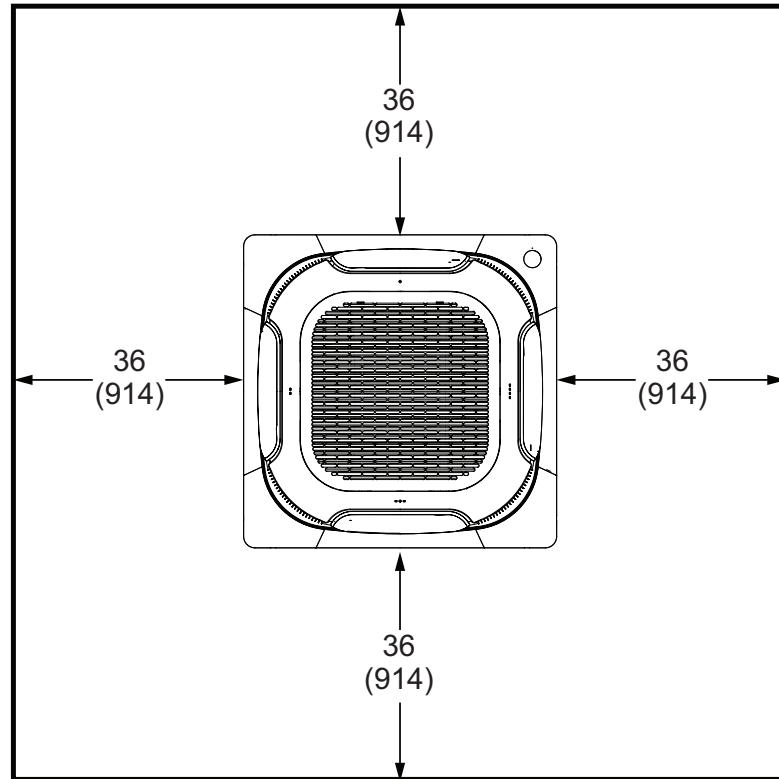

Minimum Vertical Clearances:

Minimum Clearance from Structural Ceiling to Drop Ceiling:

10-1/4 inches (260 mm) - 007, 009, 012, 015 models

13 inches (330 mm) - 015, 018, 024, 030, 036, 048 models

Minimum Clearance to Floor: 90 inches (2286 mm)


Maximum Clearance to Floor: 160 inches (4064 mm)

Minimum Service Clearance for refrigerant and drain lines - 24 inches (610 mm)

SOUND DATA

SOUND LEVELS


Model No.	Low	Medium	High
V33B009	33.6	35.1	37.7
V33B012	34.9	37.9	42.7
V33B015	37.8	42.5	46.2
V33B018	37.4	42.6	46.3
V33B024	42.8	46.4	50.5
V33B030	43.1	46.3	50.2
V33B036	46.9	50.8	54.4
V33B048	50.7	54.4	56.6

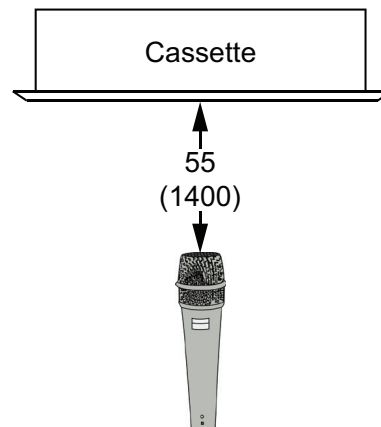


NOTE: • Semi-anechoic chamber conversion value is measured at a point 55 inches (1400 mm) under the unit.

OCTAVE BAND LEVELS

V33B009H4

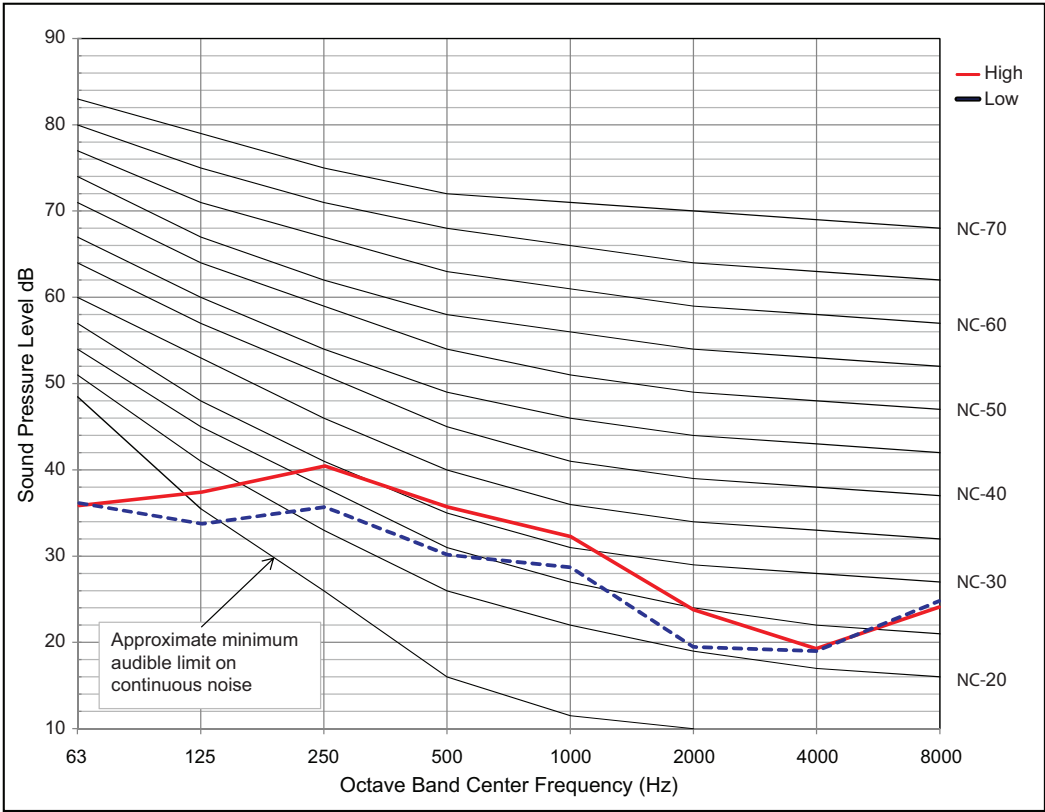


V33B012H4

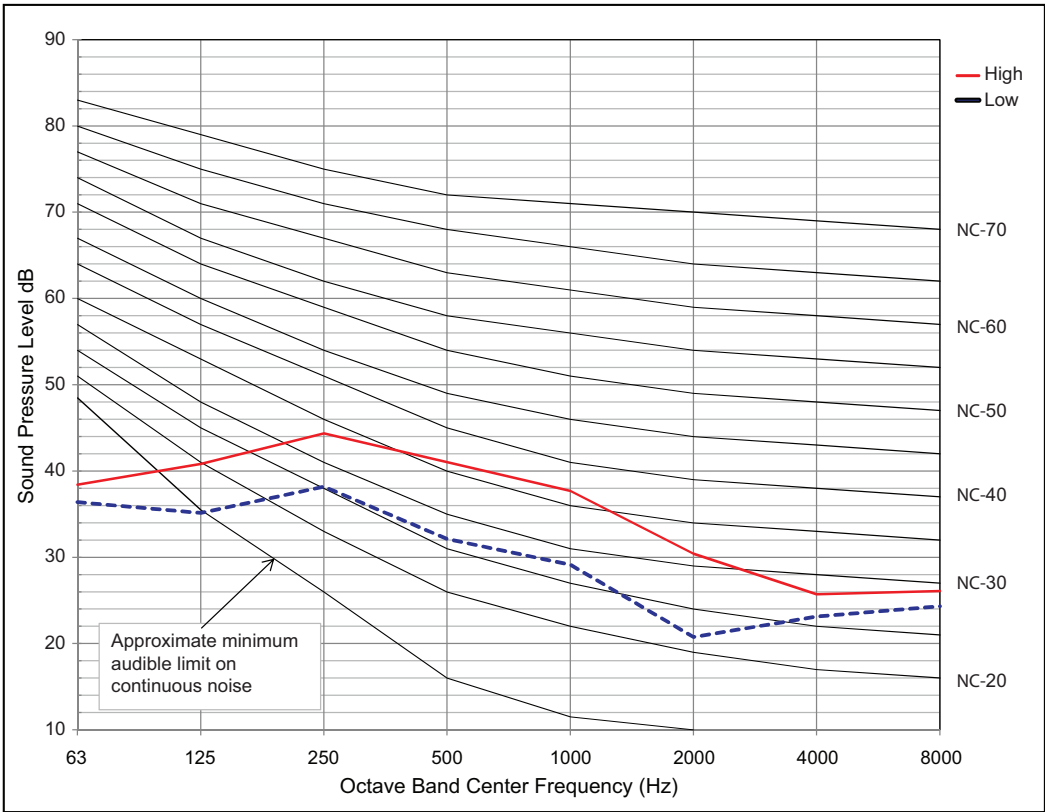


SOUND DATA

OCTAVE BAND LEVELS

V33B015H4

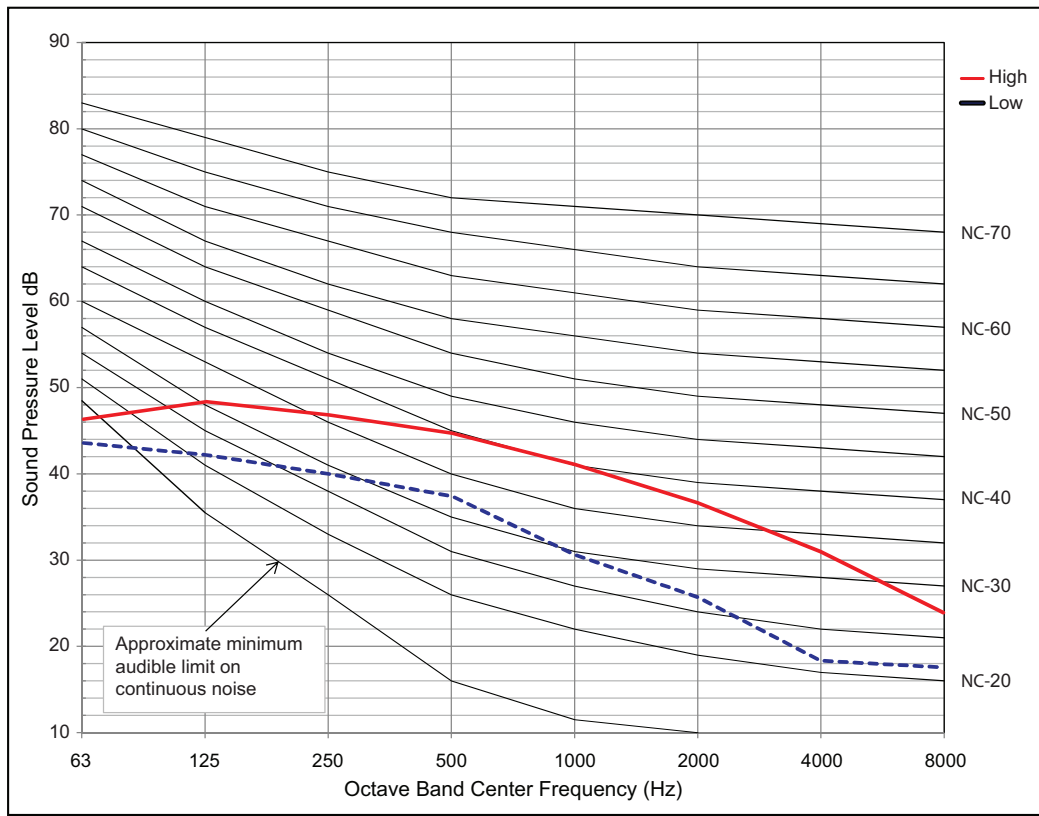


V33B018H4

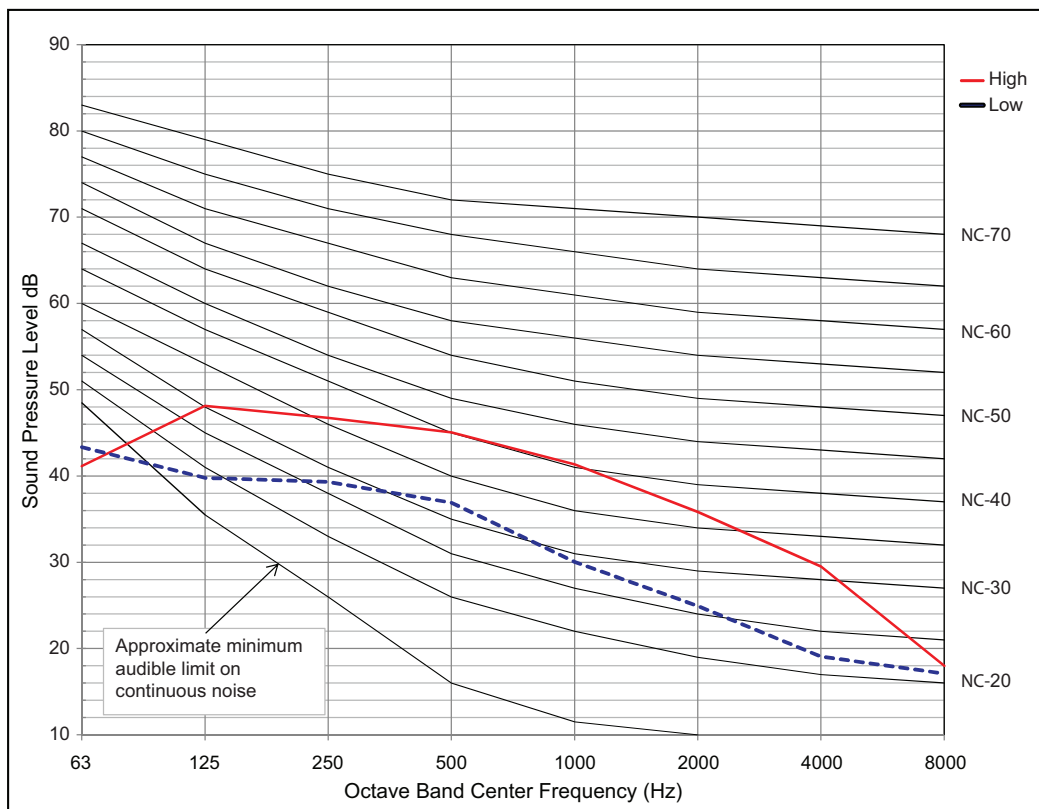


OCTAVE BAND LEVELS

V33B024H4

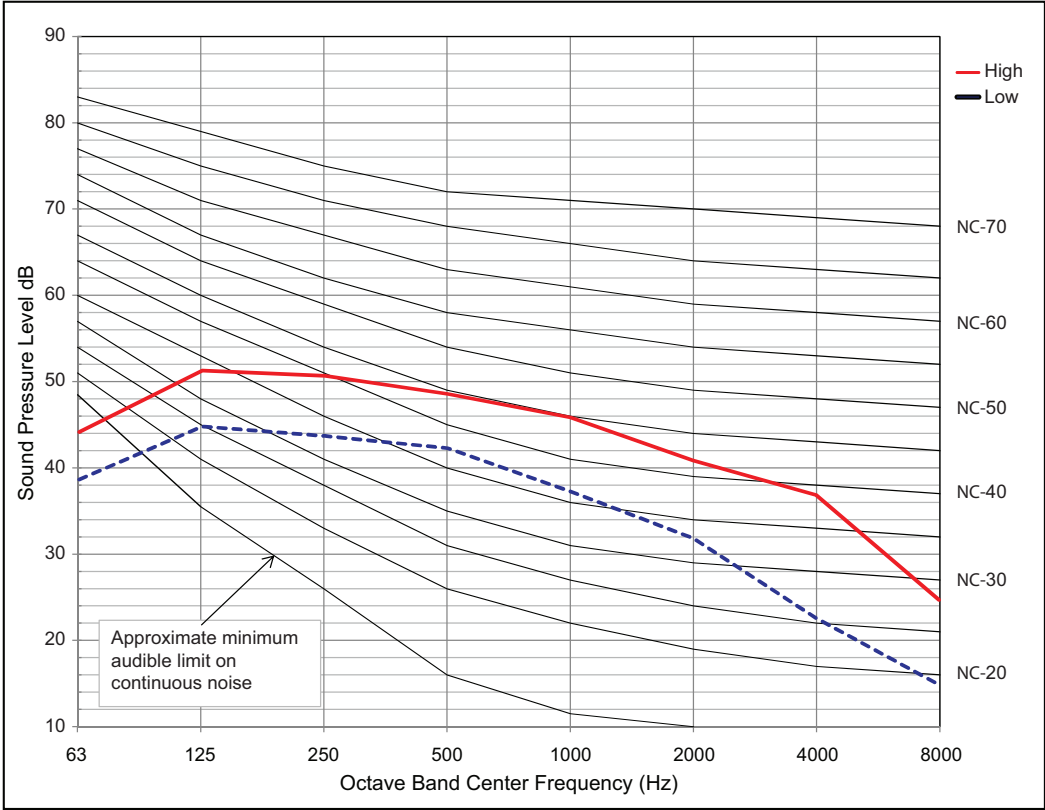


V33B030H4

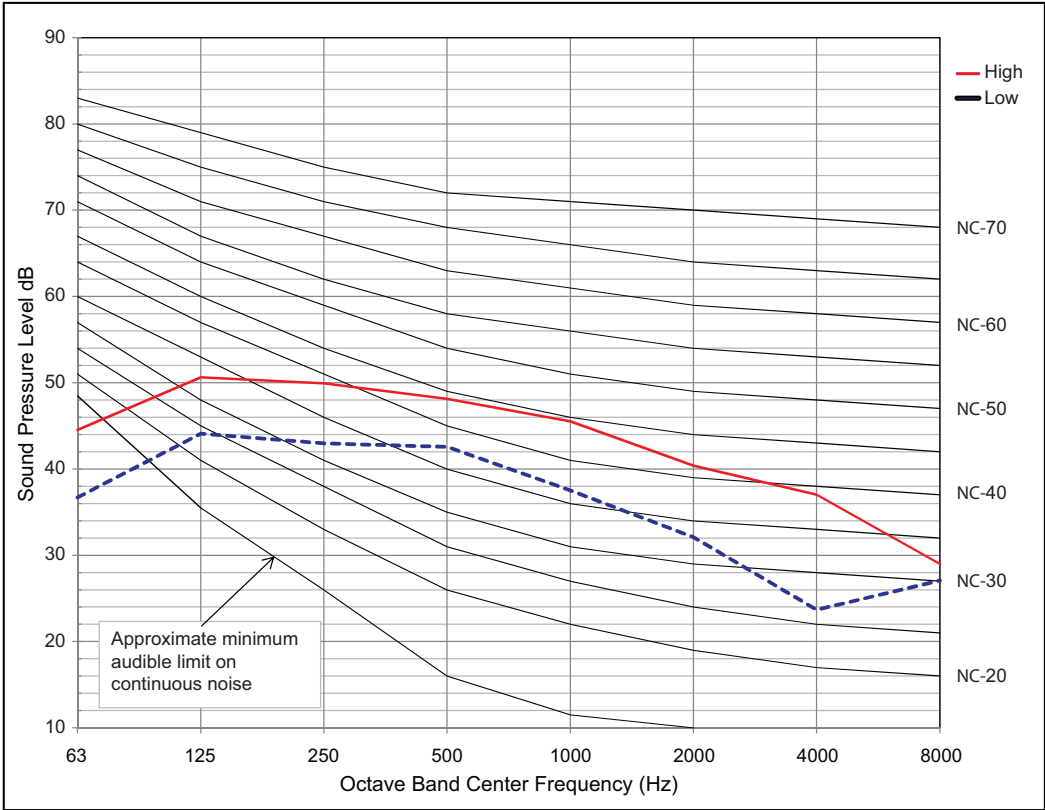


SOUND DATA

OCTAVE BAND LEVELS

V33B036H4

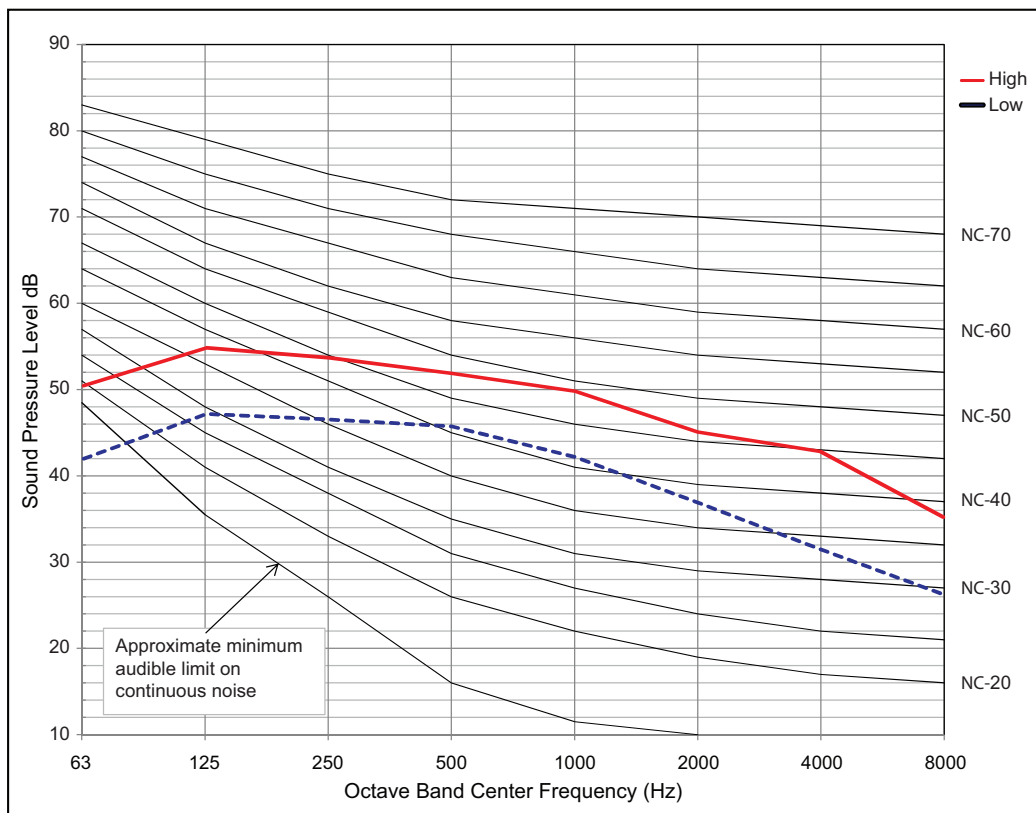


V33B048H4

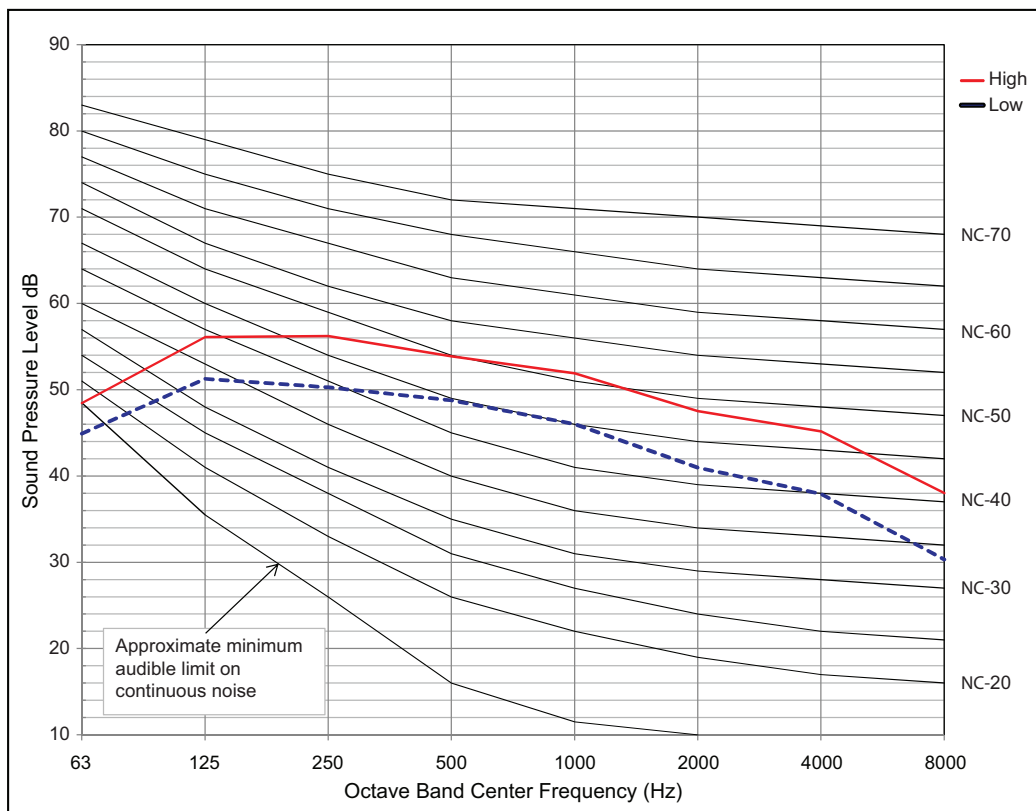


AIR THROW DATA


V33B009 - COOLING

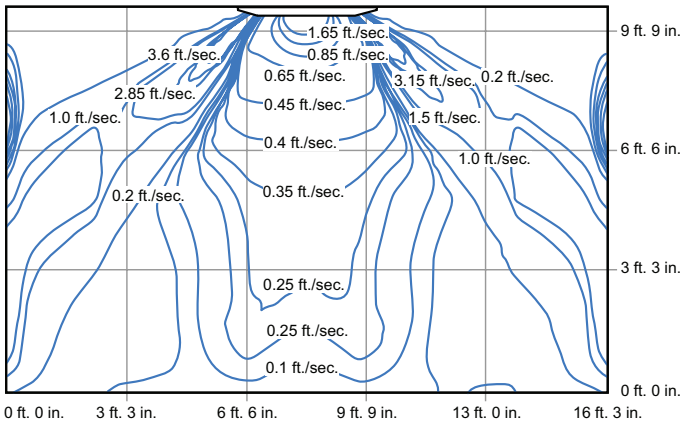


V33B009 - HEATING

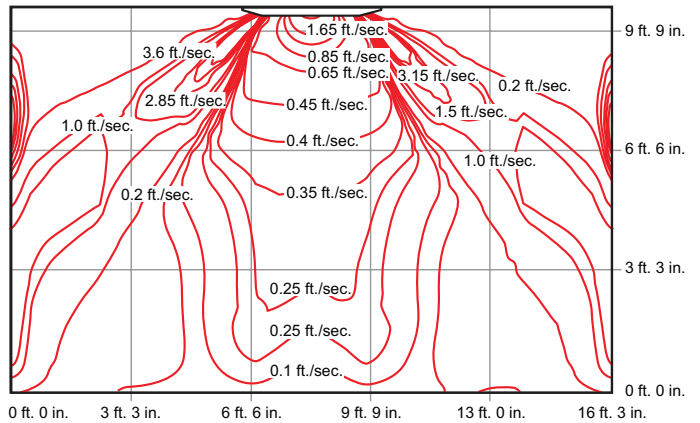


V33B012 - COOLING

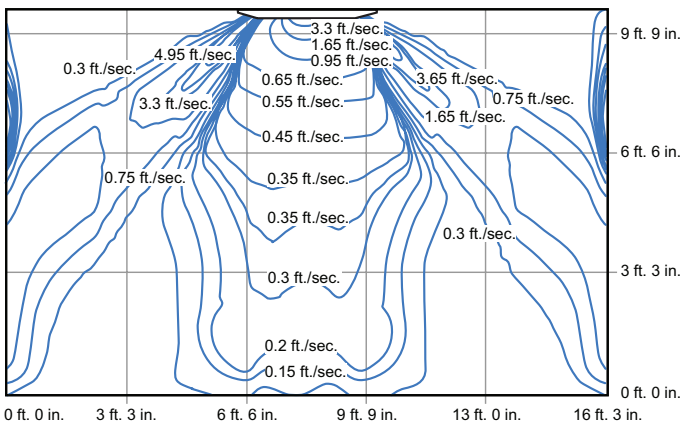


V33B012 - HEATING

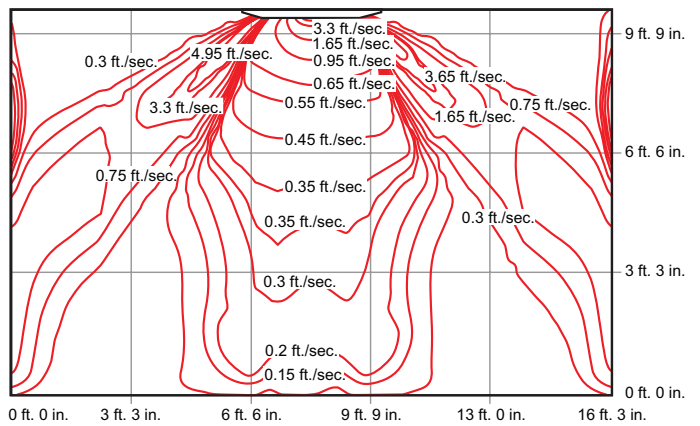


V33B015 - COOLING

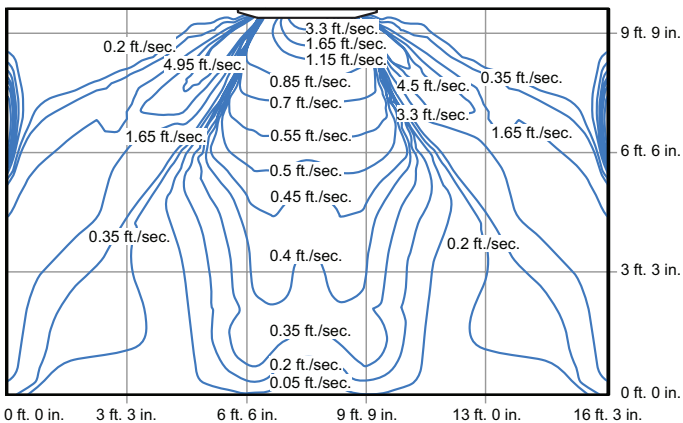


V33B015 - HEATING

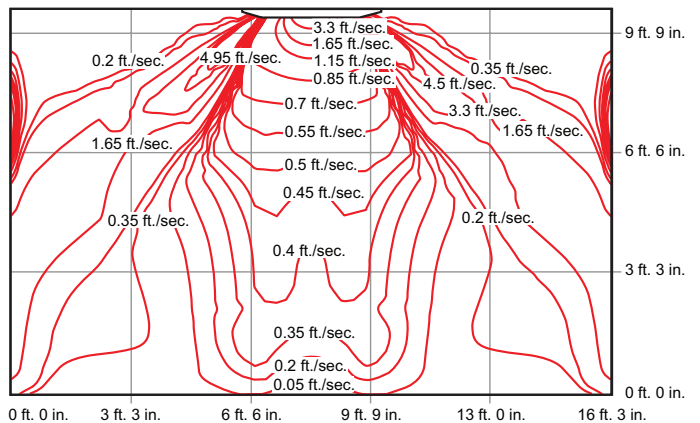

V33B018 - COOLING

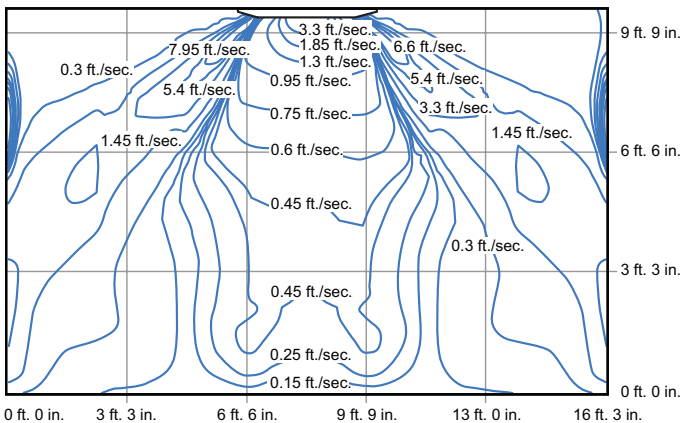


V33B018 - HEATING

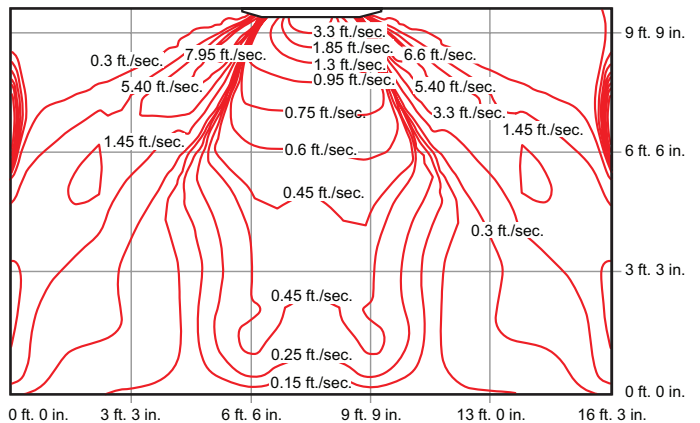


AIR THROW DATA


V33B024 - COOLING

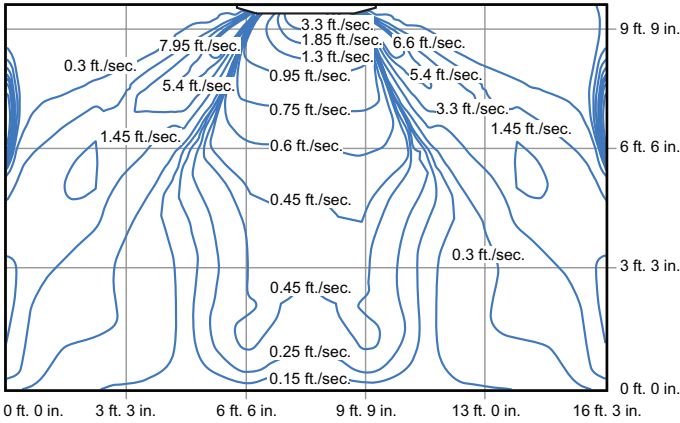


V33B024 - HEATING

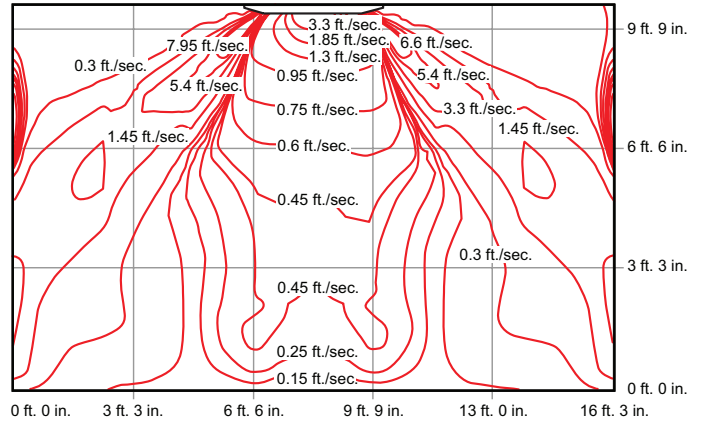


V33B030 - COOLING

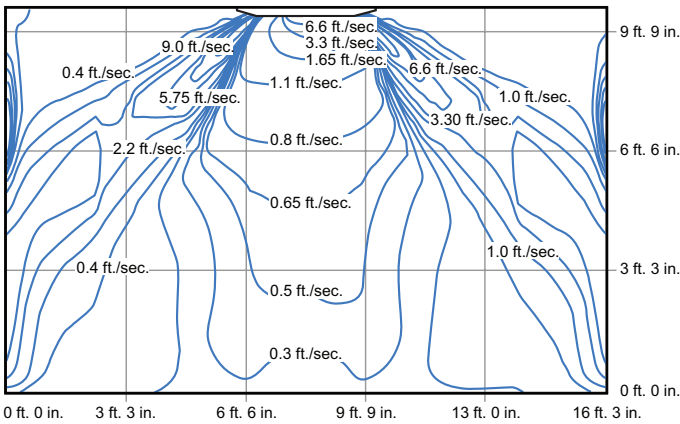


V33B030 - HEATING

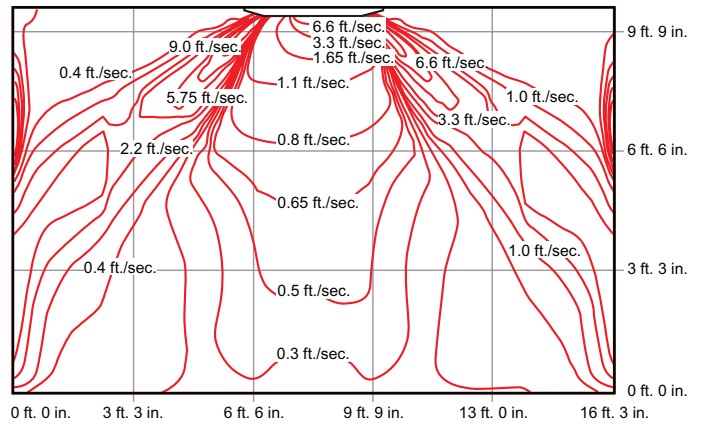


V33B036 - COOLING

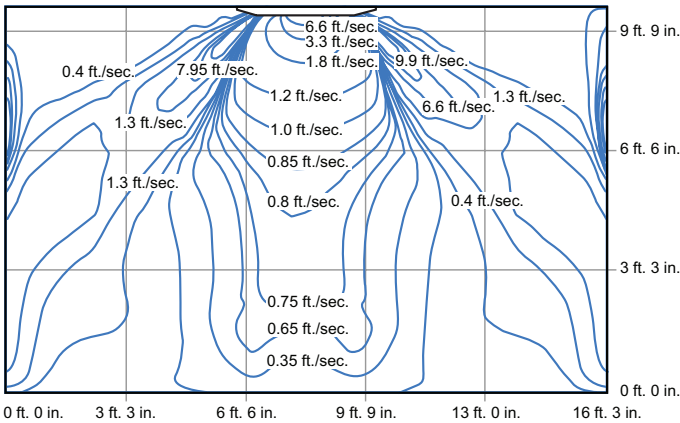


V33B036 - HEATING

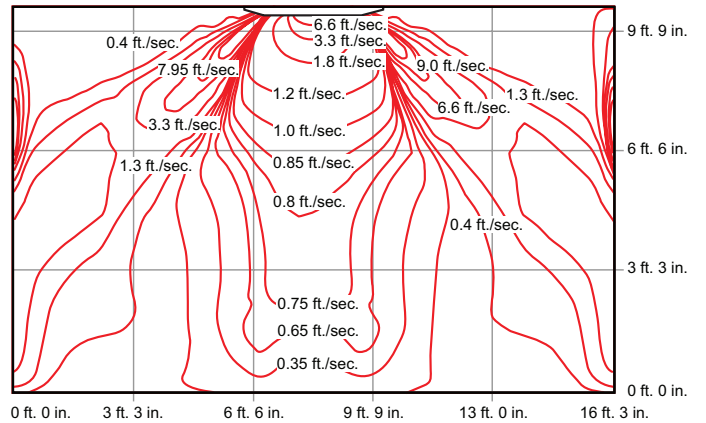

V33B048 - COOLING

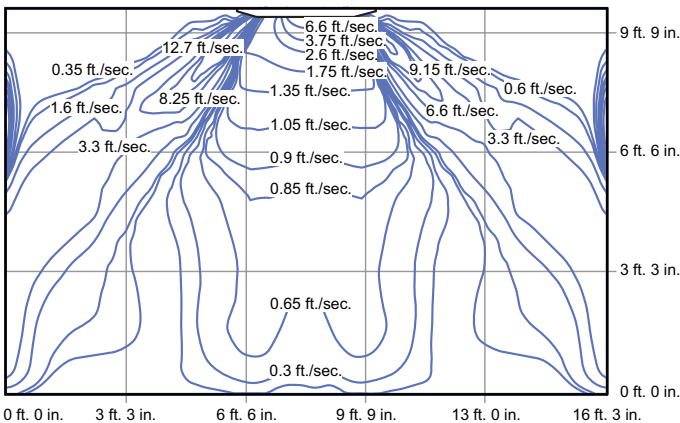

V33B048 - HEATING

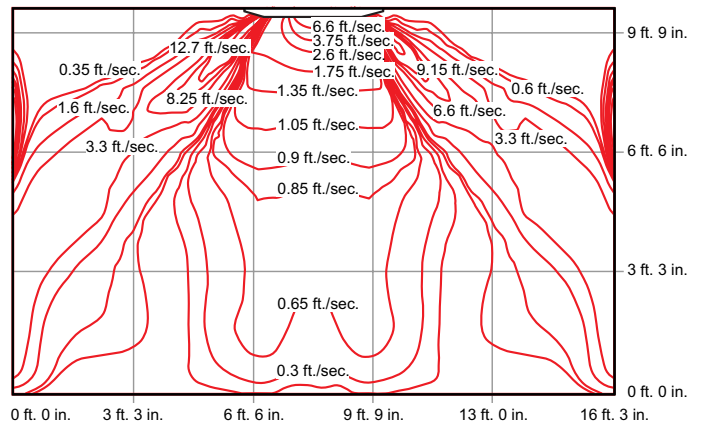

COOLING CAPACITY

Size	Outdoor Temperature °F (Dry Bulb)	Indoor Temperature - °F (Dry Bulb / Wet Bulb)											
		67 / 57		71 / 60		75 / 63		80 / 67		85 / 71		90 / 75	
		Total	Sensible	Total	Sensible	Total	Sensible	Total	Sensible	Total	Sensible	Total	Sensible
		MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH
009	-10	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	10.49	7.83	11.98	9.02
	5	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	10.49	7.83	11.98	9.02
	10	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	10.49	7.83	11.98	9.02
	15	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	10.49	7.83	11.93	8.99
	20	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	10.49	7.83	11.77	8.86
	25	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	10.49	7.83	11.59	8.73
	30	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	10.49	7.83	11.42	8.60
	35	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	10.49	7.83	11.25	8.47
	40	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	10.49	7.83	11.07	8.34
	45	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	10.49	7.83	10.90	8.21
	50	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	10.49	7.83	10.73	8.08
	55	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	10.47	7.82	10.55	7.95
	60	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	10.30	7.69	10.38	7.82
	65	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	10.12	7.56	10.21	7.69
	70	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	9.95	7.43	10.04	7.56
	75	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	9.78	7.30	9.86	7.43
	80	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	9.60	7.17	9.69	7.30
	85	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	9.43	7.04	9.52	7.17
	90	5.28	3.75	6.40	4.65	7.51	5.59	9.00	6.76	9.26	6.91	9.35	7.04
	95	5.28	3.75	6.40	4.65	7.51	5.59	8.50	6.38	9.09	6.78	9.17	6.91
012	100	5.28	3.75	6.40	4.65	7.51	5.59	8.83	6.63	8.91	6.66	8.99	6.77
	105	5.28	3.75	6.40	4.65	7.51	5.59	8.65	6.50	8.71	6.51	8.72	6.57
	110	5.28	3.75	6.40	4.65	7.51	5.59	8.14	6.11	8.34	6.22	8.46	6.37
	115	5.28	3.75	6.12	4.45	6.27	4.66	6.47	4.86	6.67	4.98	6.87	5.18
	118	4.69	3.33	5.12	3.72	5.27	3.92	5.47	4.10	5.67	4.23	5.87	4.42
	125	2.68	1.90	2.83	2.06	2.98	2.21	3.18	2.39	3.38	2.52	3.58	2.69
	-10	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	13.98	10.58	15.97	12.19
	5	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	13.98	10.58	15.97	12.19
	10	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	13.98	10.58	15.97	12.19
	15	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	13.98	10.58	15.91	12.15
	20	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	13.98	10.58	15.69	11.98
	25	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	13.98	10.58	15.45	11.80
	30	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	13.98	10.58	15.22	11.62
	35	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	13.98	10.58	14.99	11.45
	40	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	13.98	10.58	14.76	11.27
	45	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	13.98	10.58	14.53	11.10
	50	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	13.98	10.58	14.30	10.92
	55	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	13.96	10.56	14.07	10.74
	60	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	13.73	10.39	13.84	10.57
	65	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	13.50	10.22	13.61	10.39
	70	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	13.27	10.04	13.38	10.22
	75	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	13.04	9.87	13.15	10.04
	80	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	12.81	9.69	12.92	9.87
	85	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	12.58	9.52	12.69	9.69
	90	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	12.35	9.34	12.46	9.51
	95	7.04	5.07	8.53	6.29	10.02	7.55	12.00	9.13	12.12	9.17	12.23	9.34
	100	7.04	5.07	8.53	6.29	10.02	7.55	11.77	8.96	11.89	9.00	11.99	9.16
	105	7.04	5.07	8.53	6.29	10.02	7.55	11.54	8.78	11.62	8.79	11.63	8.88
	110	7.04	5.07	8.53	6.29	10.02	7.55	10.85	8.26	11.12	8.41	11.27	8.61
	115	7.04	5.07	8.16	6.02	8.36	6.30	8.63	6.57	8.89	6.73	9.16	6.99
	118	6.25	4.51	6.82	5.03	7.02	5.29	7.29	5.55	7.56	5.72	7.82	5.97
	125	3.57	2.57	3.77	2.78	3.97	2.99	4.24	3.22	4.50	3.41	4.77	3.64

NOTE - MBH = 1000 BTUs per hour.

COOLING CAPACITY

Size	Outdoor Temperature °F (Dry Bulb)	Indoor Temperature - °F (Dry Bulb / Wet Bulb)											
		67 / 57		71 / 60		75 / 63		80 / 67		85 / 71		90 / 75	
		Total	Sensible	Total	Sensible	Total	Sensible	Total	Sensible	Total	Sensible	Total	Sensible
		MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH
015	-10	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	17.48	13.23	19.96	15.24
	5	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	17.48	13.23	19.96	15.24
	10	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	17.48	13.23	19.96	15.24
	15	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	17.48	13.23	19.89	15.18
	20	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	17.48	13.23	19.61	14.97
	25	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	17.48	13.23	19.32	14.75
	30	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	17.48	13.23	19.03	14.53
	35	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	17.48	13.23	18.74	14.31
	40	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	17.48	13.23	18.45	14.09
	45	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	17.48	13.23	18.17	13.87
	50	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	17.48	13.23	17.88	13.65
	55	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	17.45	13.20	17.59	13.43
	60	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	17.16	12.99	17.30	13.21
	65	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	16.87	12.77	17.02	12.99
	70	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	16.58	12.55	16.73	12.77
	75	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	16.30	12.33	16.44	12.55
	80	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	16.01	12.12	16.15	12.33
	85	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	15.72	11.90	15.86	12.11
	90	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	15.43	11.68	15.58	11.89
	95	8.80	6.34	10.66	7.87	12.52	9.44	15.00	11.42	15.14	11.46	15.29	11.67
	100	8.80	6.34	10.66	7.87	12.52	9.44	14.71	11.20	14.86	11.24	14.99	11.45
	105	8.80	6.34	10.66	7.87	12.52	9.44	14.42	10.98	14.52	10.99	14.54	11.10
	110	8.80	6.34	10.66	7.87	12.52	9.44	13.56	10.32	13.90	10.52	14.09	10.76
	115	8.80	6.34	10.20	7.53	10.45	7.88	10.78	8.21	11.12	8.41	11.45	8.74
	118	7.82	5.63	8.53	6.29	8.78	6.62	9.11	6.93	9.44	7.15	9.78	7.46
	125	4.46	3.22	4.71	3.48	4.96	3.74	5.30	4.03	5.63	4.26	5.96	4.55
018	-10	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	20.98	15.88	23.95	18.29
	5	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	20.98	15.88	23.95	18.29
	10	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	20.98	15.88	23.95	18.29
	15	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	20.98	15.88	23.87	18.23
	20	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	20.98	15.88	23.53	17.96
	25	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	20.98	15.88	23.18	17.70
	30	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	20.98	15.88	22.84	17.43
	35	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	20.98	15.88	22.49	17.17
	40	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	20.98	15.88	22.14	16.91
	45	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	20.98	15.88	21.80	16.64
	50	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	20.98	15.88	21.45	16.38
	55	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	20.94	15.85	21.11	16.12
	60	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	20.59	15.58	20.76	15.85
	65	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	20.25	15.32	20.42	15.59
	70	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	19.90	15.06	20.07	15.33
	75	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	19.55	14.80	19.73	15.06
	80	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	19.21	14.54	19.38	14.80
	85	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	18.86	14.28	19.04	14.53
	90	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	18.52	14.02	18.69	14.27
	95	10.56	7.61	12.79	9.44	15.02	11.33	18.00	13.70	18.17	13.75	18.35	14.01
	100	10.56	7.61	12.79	9.44	15.02	11.33	17.65	13.44	17.83	13.49	17.99	13.73
	105	10.56	7.61	12.79	9.44	15.02	11.33	17.31	13.18	17.43	13.19	17.45	13.32
	110	10.56	7.61	12.79	9.44	15.02	11.33	16.27	12.39	16.67	12.62	16.91	12.91
	115	10.56	7.61	12.24	9.03	12.54	9.45	12.94	9.85	13.34	10.10	13.74	10.49
	118	9.38	6.76	10.23	7.55	10.53	7.94	10.93	8.32	11.33	8.58	11.73	8.96
	125	5.35	3.86	5.65	4.17	5.95	4.49	6.35	4.84	6.75	5.11	7.15	5.46

NOTE - MBH = 1000 BTUs per hour.

COOLING CAPACITY

Size	Outdoor Temperature °F (Dry Bulb)	Indoor Temperature - °F (Dry Bulb / Wet Bulb)											
		67 / 57		71 / 60		75 / 63		80 / 67		85 / 71		90 / 75	
		Total	Sensible	Total	Sensible	Total	Sensible	Total	Sensible	Total	Sensible	Total	Sensible
		MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH
024	-10	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	27.97	21.17	31.93	24.38
	5	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	27.97	21.17	31.93	24.38
	10	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	27.97	21.17	31.93	24.38
	15	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	27.97	21.17	31.82	24.30
	20	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	27.97	21.17	31.37	23.95
	25	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	27.97	21.17	30.91	23.60
	30	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	27.97	21.17	30.45	23.25
	35	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	27.97	21.17	29.99	22.89
	40	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	27.97	21.17	29.53	22.54
	45	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	27.97	21.17	29.07	22.19
	50	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	27.97	21.17	28.61	21.84
	55	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	27.91	21.13	28.15	21.49
	60	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	27.45	20.78	27.68	21.14
	65	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	26.99	20.43	27.22	20.79
	70	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	26.53	20.08	26.76	20.43
	75	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	26.07	19.73	26.30	20.08
	80	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	25.61	19.39	25.84	19.73
	85	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	25.15	19.04	25.38	19.38
	90	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	24.69	18.69	24.92	19.03
	95	14.08	10.15	17.06	12.59	20.03	15.10	24.00	18.27	24.23	18.34	24.46	18.68
	100	14.08	10.15	17.06	12.59	20.03	15.10	23.54	17.92	23.77	17.99	23.99	18.31
	105	14.08	10.15	17.06	12.59	20.03	15.10	23.08	17.57	23.23	17.59	23.27	17.76
	110	14.08	10.15	17.06	12.59	20.03	15.10	21.70	16.52	22.23	16.83	22.55	17.21
	115	14.08	10.15	16.32	12.04	16.72	12.61	17.25	13.13	17.79	13.46	18.32	13.99
	118	12.51	9.01	13.64	10.07	14.04	10.59	14.58	11.10	15.11	11.44	15.64	11.94
	125	7.14	5.14	7.54	5.56	7.94	5.98	8.47	6.45	9.01	6.82	9.54	7.28
030	-10	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	34.96	26.46	39.92	30.48
	5	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	34.96	26.46	39.92	30.48
	10	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	34.96	26.46	39.92	30.48
	15	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	34.96	26.46	39.78	30.37
	20	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	34.96	26.46	39.22	29.94
	25	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	34.96	26.46	38.63	29.50
	30	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	34.96	26.46	38.06	29.06
	35	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	34.96	26.46	37.48	28.62
	40	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	34.96	26.46	36.91	28.18
	45	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	34.96	26.46	36.33	27.74
	50	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	34.96	26.46	35.76	27.30
	55	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	34.89	26.41	35.18	26.86
	60	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	34.32	25.97	34.61	26.42
	65	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	33.74	25.54	34.03	25.98
	70	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	33.17	25.10	33.45	25.54
	75	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	32.59	24.67	32.88	25.10
	80	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	32.02	24.23	32.30	24.66
	85	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	31.44	23.80	31.73	24.22
	90	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	30.86	23.36	31.15	23.78
	95	17.60	12.69	21.32	15.73	25.04	18.88	30.00	22.83	30.29	22.92	30.58	23.35
	100	17.60	12.69	21.32	15.73	25.04	18.88	29.42	22.40	29.71	22.49	29.98	22.89
	105	17.60	12.69	21.32	15.73	25.04	18.88	28.85	21.96	29.04	21.98	29.08	22.20
	110	17.60	12.69	21.32	15.73	25.04	18.88	27.12	20.64	27.79	21.03	28.18	21.52
	115	17.60	12.69	20.40	15.05	20.90	15.76	21.57	16.42	22.23	16.83	22.90	17.48
	118	15.64	11.27	17.05	12.58	17.55	13.23	18.22	13.87	18.89	14.30	19.55	14.93
	125	8.92	6.43	9.42	6.95	9.92	7.48	10.59	8.06	11.26	8.52	11.92	9.10

NOTE - MBH = 1000 BTUs per hour.

COOLING CAPACITY

Size	Outdoor Temperature °F (Dry Bulb)	Indoor Temperature - °F (Dry Bulb / Wet Bulb)											
		67 / 57		71 / 60		75 / 63		80 / 67		85 / 71		90 / 75	
		Total	Sensible	Total	Sensible	Total	Sensible	Total	Sensible	Total	Sensible	Total	Sensible
		MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH
036	-10	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	41.95	31.75	47.90	36.57
	5	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	41.95	31.75	47.90	36.57
	10	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	41.95	31.75	47.90	36.57
	15	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	41.95	31.75	47.74	36.45
	20	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	41.95	31.75	47.05	35.92
	25	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	41.95	31.75	46.36	35.40
	30	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	41.95	31.75	45.67	34.87
	35	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	41.95	31.75	44.98	34.34
	40	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	41.95	31.75	44.29	33.82
	45	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	41.95	31.75	43.60	33.29
	50	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	41.95	31.75	42.91	32.76
	55	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	41.87	31.69	42.22	32.23
	60	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	41.18	31.17	41.53	31.71
	65	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	40.49	30.65	40.84	31.18
	70	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	39.80	30.12	40.15	30.65
	75	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	39.11	29.60	39.46	30.12
	80	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	38.42	29.08	38.76	29.60
	85	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	37.73	28.56	38.07	29.07
	90	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	37.04	28.03	37.38	28.54
	95	21.12	15.22	25.59	18.88	30.05	22.65	36.00	27.40	36.35	27.51	36.69	28.01
	100	21.12	15.22	25.59	18.88	30.05	22.65	35.31	26.88	35.66	26.99	35.98	27.47
	105	21.12	15.22	25.59	18.88	30.05	22.65	34.62	26.35	34.85	26.38	34.90	26.65
	110	21.12	15.22	25.59	18.88	30.05	22.65	32.55	24.77	33.35	25.24	33.82	25.82
	115	21.12	15.22	24.48	18.06	25.08	18.91	25.88	19.70	26.68	20.19	27.48	20.98
	118	18.76	13.52	20.47	15.10	21.07	15.88	21.87	16.64	22.67	17.16	23.47	17.92
	125	10.71	7.72	11.31	8.34	11.91	8.98	12.71	9.67	13.51	10.22	14.31	10.92
048	-10	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	55.93	42.34	63.87	48.76
	5	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	55.93	42.34	63.87	48.76
	10	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	55.93	42.34	63.87	48.76
	15	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	55.93	42.34	63.64	48.59
	20	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	55.93	42.34	62.75	47.91
	25	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	55.93	42.34	61.82	47.20
	30	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	55.93	42.34	60.89	46.49
	35	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	55.93	42.34	59.97	45.79
	40	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	55.93	42.34	59.05	45.09
	45	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	55.93	42.34	58.13	44.38
	50	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	55.93	42.34	57.21	43.68
	55	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	55.83	42.26	56.29	42.98
	60	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	54.91	41.56	55.37	42.27
	65	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	53.99	40.86	54.45	41.57
	70	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	53.07	40.16	53.53	40.87
	75	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	52.15	39.47	52.61	40.17
	80	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	51.22	38.77	51.69	39.46
	85	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	50.30	38.07	50.77	38.76
	90	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	49.38	37.38	49.84	38.06
	95	28.17	20.30	34.12	25.17	40.07	30.21	48.00	36.54	48.46	36.68	48.92	37.35
	100	28.17	20.30	34.12	25.17	40.07	30.21	47.08	35.83	47.54	35.98	47.97	36.63
	105	28.17	20.30	34.12	25.17	40.07	30.21	46.16	35.13	46.47	35.17	46.53	35.53
	110	28.17	20.30	34.12	25.17	40.07	30.21	43.40	33.03	44.46	33.65	45.09	34.43
	115	28.17	20.30	32.64	24.08	33.44	25.21	34.51	26.27	35.58	26.93	36.64	27.98
	118	25.02	18.03	27.29	20.13	28.09	21.17	29.15	22.19	30.22	22.87	31.29	23.89
	125	14.28	10.29	15.08	11.12	15.88	11.97	16.94	12.90	18.01	13.63	19.08	14.57

NOTE - MBH = 1000 BTUs per hour.

HEATING CAPACITY

Size	Outdoor Temperature (°F)		Indoor Temperature - °F (Dry Bulb)					
			61	64	67	70	73	75
	Dry Bulb	Wet Bulb	Total Capacity					
			MBH	MBH	MBH	MBH	MBH	MBH
009	-13	-14	4.92	4.70	4.48	4.26	4.04	3.89
	-8	-9	5.51	5.28	5.06	4.84	4.62	4.47
	-3	-4	6.09	5.87	5.65	5.42	5.20	5.05
	2	1	6.67	6.45	6.23	6.01	5.78	5.64
	7	6	7.25	7.03	6.81	6.59	6.37	6.22
	12	10	7.72	7.50	7.28	7.06	6.83	6.69
	17	15	8.30	8.08	7.86	7.64	7.42	7.27
	22	20	8.89	8.66	8.44	8.22	8.00	7.85
	27	24	9.35	9.13	8.91	8.69	8.47	8.32
	32	29	9.94	9.71	9.49	9.27	9.05	8.90
	37	34	10.52	10.30	10.08	9.85	9.63	9.48
	42	38	10.98	10.76	10.54	10.32	10.10	9.63
	47	43	11.57	11.35	11.12	10.90	10.14	9.63
	52	47	12.03	11.81	11.59	10.90	10.14	9.63
	57	52	12.62	12.40	11.66	10.90	10.14	9.63
	62	56	13.08	12.42	11.66	10.90	10.14	9.63
	67	61	13.18	12.42	11.66	10.90	10.14	9.63
	72	66	13.18	12.42	11.66	10.90	10.14	9.63
	75	69	13.18	12.42	11.66	10.90	10.14	9.63
	80	74	13.18	12.42	11.66	10.90	10.14	9.63
012	-13	-14	5.34	5.07	4.79	4.51	4.24	4.05
	-8	-9	6.14	5.86	5.59	5.31	5.03	4.85
	-3	-4	6.94	6.66	6.38	6.11	5.83	5.65
	2	1	7.74	7.46	7.18	6.91	6.63	6.44
	7	6	8.53	8.26	7.98	7.70	7.43	7.24
	12	10	9.17	8.89	8.62	8.34	8.06	7.88
	17	15	9.97	9.69	9.41	9.14	8.86	8.68
	22	20	10.77	10.49	10.21	9.94	9.66	9.47
	27	24	11.40	11.13	10.85	10.57	10.30	10.11
	32	29	12.20	11.92	11.65	11.37	11.09	10.91
	37	34	13.00	12.72	12.44	12.17	11.89	11.71
	42	38	13.64	13.36	13.08	12.81	12.53	12.02
	47	43	14.43	14.16	13.88	13.60	12.65	12.02
	52	47	15.07	14.79	14.52	13.60	12.65	12.02
	57	52	15.87	15.50	14.55	13.60	12.65	12.02
	62	56	16.45	15.50	14.55	13.60	12.65	12.02
	67	61	16.45	15.50	14.55	13.60	12.65	12.02
	72	66	16.45	15.50	14.55	13.60	12.65	12.02
	75	69	16.45	15.50	14.55	13.60	12.65	12.02
	80	74	16.45	15.50	14.55	13.60	12.65	12.02

NOTE - MBH = 1000 BTUs per hour.

HEATING CAPACITY

Size	Outdoor Temperature (°F)		Indoor Temperature - °F (Dry Bulb)					
			61	64	67	70	73	75
			Total Capacity					
	Dry Bulb	Wet Bulb	MBH	MBH	MBH	MBH	MBH	MBH
015	-13	-14	7.68	7.33	6.99	6.64	6.29	6.06
	-8	-9	8.59	8.24	7.90	7.55	7.20	6.97
	-3	-4	9.50	9.15	8.80	8.46	8.11	7.88
	2	1	10.41	10.06	9.71	9.37	9.02	8.79
	7	6	11.31	10.97	10.62	10.28	9.93	9.70
	12	10	12.04	11.70	11.35	11.00	10.66	10.43
	17	15	12.95	12.61	12.26	11.91	11.57	11.34
	22	20	13.86	13.51	13.17	12.82	12.48	12.25
	27	24	14.59	14.24	13.90	13.55	13.20	12.97
	32	29	15.50	15.15	14.80	14.46	14.11	13.88
	37	34	16.41	16.06	15.71	15.37	15.02	14.79
	42	38	17.13	16.79	16.44	16.09	15.75	15.02
	47	43	18.04	17.70	17.35	17.00	15.81	15.02
	52	47	18.77	18.42	18.08	17.00	15.81	15.02
	57	52	19.68	19.33	18.19	17.00	15.81	15.02
	62	56	20.40	19.37	18.19	17.00	15.81	15.02
	67	61	20.56	19.37	18.19	17.00	15.81	15.02
	72	66	20.56	19.37	18.19	17.00	15.81	15.02
	75	69	20.56	19.37	18.19	17.00	15.81	15.02
	80	74	20.56	19.37	18.19	17.00	15.81	15.02
018	-13	-14	9.71	9.27	8.84	8.40	7.96	7.67
	-8	-9	10.86	10.42	9.99	9.55	9.11	8.82
	-3	-4	12.01	11.57	11.14	10.70	10.26	9.97
	2	1	13.16	12.72	12.29	11.85	11.41	11.12
	7	6	14.31	13.87	13.43	13.00	12.56	12.27
	12	10	15.23	14.79	14.35	13.92	13.48	13.19
	17	15	16.38	15.94	15.50	15.07	14.63	14.34
	22	20	17.53	17.09	16.65	16.22	15.78	15.49
	27	24	18.45	18.01	17.57	17.14	16.70	16.41
	32	29	19.60	19.16	18.72	18.29	17.85	17.56
	37	34	20.75	20.31	19.87	19.44	19.00	18.71
	42	38	21.67	21.23	20.79	20.35	19.92	19.00
	47	43	22.82	22.38	21.94	21.00	20.00	19.00
	52	47	23.74	23.30	22.86	21.00	20.00	19.00
	57	52	24.89	24.45	23.00	21.00	20.00	19.00
	62	56	25.81	24.50	23.00	21.00	20.00	19.00
	67	61	26.00	24.50	23.00	21.00	20.00	19.00
	72	66	26.00	24.50	23.00	21.00	20.00	19.00
	75	69	26.00	24.50	23.00	21.00	20.00	19.00
	80	74	26.00	24.50	23.00	21.00	20.00	19.00

NOTE - MBH = 1000 BTUs per hour.

HEATING CAPACITY

Size	Outdoor Temperature (°F)		Indoor Temperature - °F (Dry Bulb)					
			61	64	67	70	73	75
			Total Capacity					
	Dry Bulb	Wet Bulb	MBH	MBH	MBH	MBH	MBH	MBH
024	-13	-14	12.95	12.40	11.85	11.30	10.75	10.38
	-8	-9	14.23	13.69	13.14	12.59	12.04	11.67
	-3	-4	15.54	14.99	14.44	13.89	13.34	12.98
	2	1	16.87	16.32	15.77	15.22	14.67	14.30
	7	6	18.21	17.66	17.11	16.56	16.01	15.65
	12	10	19.30	18.75	18.20	17.65	17.10	16.73
	17	15	20.67	20.12	19.57	19.02	18.47	18.11
	22	20	22.06	21.51	20.97	20.42	19.87	19.50
	27	24	23.19	22.64	22.09	21.54	20.99	20.63
	32	29	24.61	24.07	23.52	22.97	22.42	22.05
	37	34	26.06	25.51	24.96	24.41	23.86	23.49
	42	38	27.22	26.67	26.12	25.57	25.03	23.86
	47	43	28.70	28.15	27.60	27.00	25.12	23.86
	52	47	29.89	29.34	28.79	27.00	25.12	23.86
	57	52	31.39	30.77	28.88	27.00	25.12	23.86
	62	56	32.61	30.77	28.88	27.00	25.12	23.86
	67	61	32.65	30.77	28.88	27.00	25.12	23.86
	72	66	32.65	30.77	28.88	27.00	25.12	23.86
	75	69	32.65	30.77	28.88	27.00	25.12	23.86
	80	74	32.65	30.77	28.88	27.00	25.12	23.86
030	-13	-14	13.82	13.12	12.43	11.74	11.05	10.59
	-8	-9	15.77	15.08	14.39	13.69	13.00	12.54
	-3	-4	17.72	17.03	16.34	15.65	14.95	14.49
	2	1	19.68	18.98	18.29	17.60	16.91	16.45
	7	6	21.63	20.94	20.25	19.55	18.86	18.40
	12	10	23.19	22.50	21.81	21.12	20.42	19.96
	17	15	25.14	24.45	23.76	23.07	22.38	21.92
	22	20	27.10	26.41	25.71	25.02	24.33	23.87
	27	24	28.66	27.97	27.28	26.59	25.89	25.43
	32	29	30.61	29.92	29.23	28.54	27.85	27.39
	37	34	32.57	31.88	31.18	30.49	29.80	29.34
	42	38	34.13	33.44	32.75	32.05	31.36	30.05
	47	43	36.08	35.39	34.70	34.00	31.63	30.05
	52	47	37.65	36.95	36.26	34.00	31.63	30.05
	57	52	39.60	38.74	36.37	34.00	31.63	30.05
	62	56	41.12	38.74	36.37	34.00	31.63	30.05
	67	61	41.12	38.74	36.37	34.00	31.63	30.05
	72	66	41.12	38.74	36.37	34.00	31.63	30.05
	75	69	41.12	38.74	36.37	34.00	31.63	30.05
	80	74	41.12	38.74	36.37	34.00	31.63	30.05

NOTE - MBH = 1000 BTUs per hour.

HEATING CAPACITY

Size	Outdoor Temperature (°F)		Indoor Temperature - °F (Dry Bulb)					
			61	64	67	70	73	75
			Total Capacity					
	Dry Bulb	Wet Bulb	MBH	MBH	MBH	MBH	MBH	MBH
036	-13	-14	16.50	15.65	14.79	13.94	13.08	12.51
	-8	-9	18.96	18.11	17.25	16.40	15.54	14.98
	-3	-4	21.43	20.57	19.72	18.86	18.01	17.44
	2	1	23.89	23.03	22.18	21.32	20.47	19.90
	7	6	26.35	25.50	24.64	23.79	22.93	22.36
	12	10	28.32	27.47	26.61	25.76	24.90	24.33
	17	15	30.78	29.93	29.07	28.22	27.36	26.80
	22	20	33.25	32.39	31.54	30.68	29.83	29.26
	27	24	35.22	34.36	33.51	32.65	31.80	31.23
	32	29	37.68	36.82	35.97	35.11	34.26	33.69
	37	34	40.14	39.29	38.43	37.58	36.72	36.15
	42	38	42.11	41.26	40.40	39.55	38.69	37.12
	47	43	44.57	43.72	42.86	42.00	39.07	37.12
	52	47	46.54	45.69	44.83	42.00	39.07	37.12
	57	52	49.01	47.86	44.93	42.00	39.07	37.12
	62	56	50.79	47.86	44.93	42.00	39.07	37.12
	67	61	50.79	47.86	44.93	42.00	39.07	37.12
	72	66	50.79	47.86	44.93	42.00	39.07	37.12
	75	69	50.79	47.86	44.93	42.00	39.07	37.12
	80	74	50.79	47.86	44.93	42.00	39.07	37.12
048	-13	-14	24.61	23.51	22.41	21.31	20.21	19.48
	-8	-9	27.47	26.38	25.28	24.18	23.08	22.35
	-3	-4	30.34	29.24	28.15	27.05	25.95	25.21
	2	1	33.21	32.11	31.01	29.92	28.82	28.08
	7	6	36.08	34.98	33.88	32.78	31.68	30.95
	12	10	38.38	37.28	36.18	35.08	33.98	33.25
	17	15	41.24	40.15	39.05	37.95	36.85	36.12
	22	20	44.11	43.01	41.91	40.82	39.72	38.98
	27	24	46.41	45.31	44.21	43.11	42.01	41.28
	32	29	49.28	48.18	47.08	45.98	44.88	44.15
	37	34	52.14	51.05	49.95	48.85	47.75	47.02
	42	38	54.44	53.34	52.24	51.14	50.04	47.72
	47	43	57.31	56.21	55.11	54.00	50.23	47.72
	52	47	59.60	58.50	57.41	54.00	50.23	47.72
	57	52	62.47	61.37	57.77	54.00	50.23	47.72
	62	56	64.77	61.53	57.77	54.00	50.23	47.72
	67	61	65.30	61.53	57.77	54.00	50.23	47.72
	72	66	65.30	61.53	57.77	54.00	50.23	47.72
	75	69	65.30	61.53	57.77	54.00	50.23	47.72
	80	74	65.30	61.53	57.77	54.00	50.23	47.72

NOTE - MBH = 1000 BTUs per hour.



Visit us at www.lennox.com

For the latest technical information, www.lennoxcommercial.com

Contact us at 1-800-4-LENNOX

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability.
Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury.
Installation and service must be performed by a qualified installer and servicing agency.

©2019 Lennox Industries, Inc.