

SUBMITTAL DATA MODE SELECTION BOX V1MSBB02HR VRF Heat Recovery

| Mode Selection Box | For: Reference | Approval | Review | Construction |
|---------------------|----------------|----------|--------|--------------|
| System Designation: | Date: | | | |
| Schedule No.: | Location: | | | |
| Location: | Architect: | | | |
| Job: | Engineer: | | | |

FEATURES

Allows simultaneous heating and cooling of multiple zones on VRF Heat Recovery outdoor units.

- · No drain connection required
- The MCU must be mounted indoors, level, with the pipes running horizontally in and out of unit.

WARRANTY

• 10-year limited warranty.*See warranty for details.


| SPECIFICATIONS | | | | | |
|--|---------------|-------------------|--|--|--|
| PERFORMANCE | | | | | |
| Number of Ports | 6 | | | | |
| Quantity of Conectable Indoor Units | | 1-32 | | | |
| Maximum Combined Capacity per Port (Btu/h) | 54,000 | | | | |
| Maximum Connected Capacity pobox (Btu/h) | 216,000 | | | | |
| ELECTRICAL DATA | | | | | |
| Power Supply (Volts/Hertz/Phase | 208-230/60/1 | | | | |
| DIMENSIONS | | | | | |
| Unit Dimensions (in) | Height | 7-13/16 | | | |
| | Width | 28-11/16 | | | |
| | Depth | 18-7/16 | | | |
| PIPING CONNECTIONS | | | | | |
| Indoor Unit (in) | Liquid Pipe | quid Pipe 3/8 X 6 | | | |
| | Gas Pipe | 5/8 X 6 | | | |
| Outdoor Unit (in) | Liquid Pipe | 5/8 | | | |
| | H.P. Gas Pipe | 1-1/8 | | | |
| | Suction Pipe | 1-1/8 | | | |
| Net Weight (lb) | | 62.8 | | | |








SUBMITTAL DATA MODE SELECTION BOX V1MSBB06HR VRF Heat Recovery

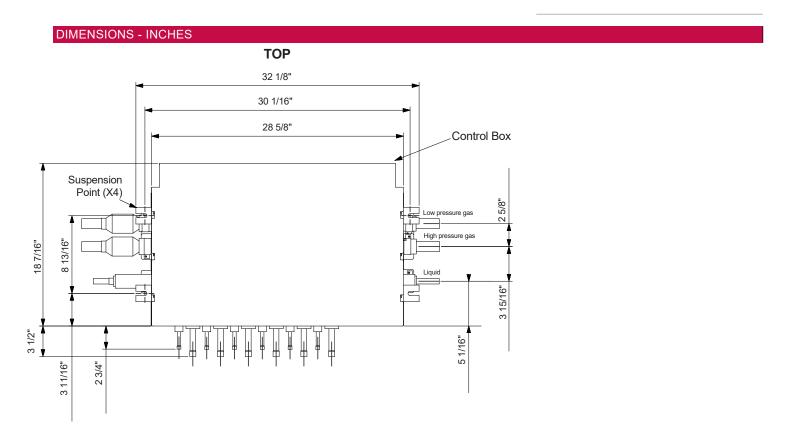

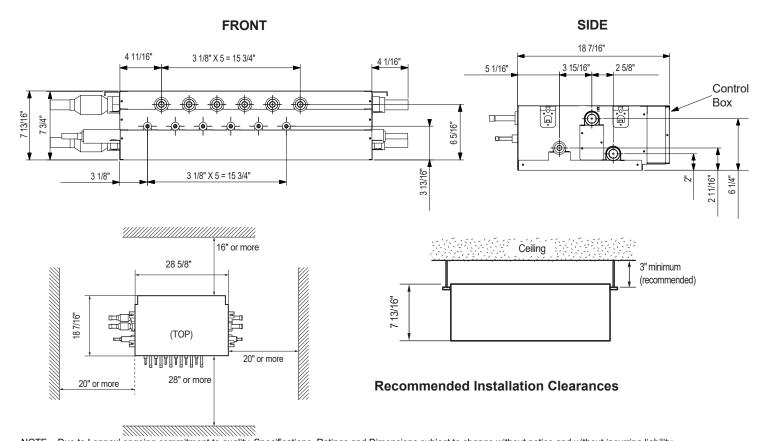

NOTE – Due to Lennox' orgoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury.

Installation and service must be performed by a qualified installer and servicing agency.

496309 (202412)

©2024 Lennox Industries Inc.